

DECLARATION

I, Susumu Takahashi, residing at 7th Fl., Shuwa Kioicho Park Bldg., 3-6, Kioicho, Chiyoda-ku, Tokyo 102-0094, Japan, hereby declare that I have a thorough knowledge of Japanese and English languages, and that the attached pages contain a correct translation into English of the application document of Japanese Patent Application No. 10-295931 filed on October 16, 1998 in the name of CANON KABUSHIKI KAISHA.

I further declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made, are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issuing thereon.

Signed this 26th day of September, 2005.



Susumu Takahashi

Translation of Japanese Patent Application No. 10-295931

[Type of Document(s)]	Application for patent
[Reference Number]	3669088
[Filing Date]	October 16, 1998
[Addressee]	Director-General of the Patent Office Esq.
[International Patent Classification]	H04N 1/00
[Title of Invention]	COMMUNICATION APPARATUS, IMAGE FORMING APPARATUS AND IMAGE FORMING SYSTEM
[Number of Claim(s)]	18
[Inventor(s)]	
[Address/Domicile]	c/o CANON KABUSHIKI KAISHA, 3-30-2, Shimomaruko, Ohta-ku, Tokyo, Japan
[Name]	Kenzo Sekiguchi
[Inventor(s)]	
[Address/Domicile]	c/o CANON KABUSHIKI KAISHA, 3-30-2, Shimomaruko, Ohta-ku, Tokyo, Japan
[Name]	Hiroyuki Yaguchi
[Inventor(s)]	
[Address/Domicile]	c/o CANON KABUSHIKI KAISHA, 3-30-2, Shimomaruko, Ohta-ku, Tokyo, Japan
[Name]	Tomohiro Akiba
[Inventor(s)]	
[Address/Domicile]	c/o CANON KABUSHIKI KAISHA, 3-30-2, Shimomaruko, Ohta-ku, Tokyo, Japan
[Name]	Kenji Aiyama
[Inventor(s)]	
[Address/Domicile]	c/o CANON KABUSHIKI KAISHA, 3-30-2, Shimomaruko, Ohta-ku, Tokyo, Japan
[Name]	Kotaro Yamaguchi
[Inventor(s)]	
[Address/Domicile]	c/o CANON KABUSHIKI KAISHA, 3-30-2, Shimomaruko,

[Name]	Ohta-ku, Tokyo, Japan Ritsushi Tanabe
[Inventor(s)]	
[Address/Domicile]	c/o CANON KABUSHIKI KAISHA, 3-30-2, Shimomaruko, Ohta-ku, Tokyo, Japan
[Name]	Toru Maeda
[Applicant for Patent]	
[Identification Number]	000001007
[Name]	CANON KABUSHIKI KAISHA
[Agent]	
[Identification Number]	100076428
[Patent Attorney]	
[Name]	Yasunori Ohtsuka
[Telephone Number]	03-5276-3241
[Selected Agent]	
[Identification Number]	100093908
[Patent Attorney]	
[Name]	Kenichi Matsumoto
[Telephone Number]	03-5276-3241
[Selected Agent]	
[Identification Number]	100101306
[Patent Attorney]	
[Name]	Yukio Maruyama
[Telephone Number]	03-5276-3241
[Detail of Fee(s)]	
[Register Number of Prepayment]	003458
[Amount of Payment]	21000
[List of Attached Documents]	
[Classification]	Specification 1
[Classification]	Drawing(s) 1
[Classification]	Abstract 1
[Number of General Power of Attorney]	9704672
[Proof Required? Y/N]	Yes

[Type of the Document] Specification

[Title of the Invention]

COMMUNICATION APPARATUS, IMAGE FORMING APPARATUS
AND IMAGE FORMING SYSTEM

5 [What is Claimed is]

[Claim 1] Communication apparatus for forming
and outputting image data on the basis of received
electric data, comprising:

data analyzing means for analyzing, in the case
10 where non image data is received as the electric data,
the content of the non-image data; and

data converting means for converting, in response
to the result of said data analyzing means, the non
image data into image data.

15 [Claim 2] The apparatus according to claim 1,
wherein the non image data is data composed of a
character code.

[Claim 3] The apparatus according to claim 2,
wherein the character code data contains binary data
20 converted into a character code.

[Claim 4] The apparatus according to claim 1,
wherein said data converting means comprises bit map
data forming means for converting a character code
into bit map data.

25 [Claim 5] The apparatus according to claim 3,

wherein said data analyzing means comprises character data analyzing means for discriminating between the binary data portion and other portion.

[Claim 6] The apparatus according to claim 3,
5 wherein said data converting means comprises at least one of decoding means for decoding the binary data portion into original binary data and data rasterizing means for forming image data by rasterizing the decoded binary data.

10 [Claim 7] The apparatus according to any one of claims 1 to 3, wherein the electronic data is received in accordance with TCP/IP or SMTP.

[Claim 8] The apparatus according to claim 2,
further comprising language determining means for
15 determining a language type of the character code.

[Claim 9] The apparatus according to claim 7,
wherein the electronic data is described in MIME
format.

[Claim 10] The apparatus according to claim 9,
20 further comprising content analyzing means for detecting a language type and an address of a source from the electronic data.

[Claim 11] The apparatus according to claim 10,
wherein said content analyzing means detects the
25 language type and the address from an MIME header.

[Claim 12] The apparatus according to claim 10,
wherein said content means divides, by using MIME
header information, received electronic information
composed of a character code into a character code
5 portion and a binary data portion converted into the
character code.

[Claim 13] The apparatus according to claim 10,
further comprising error report forming means for
transmitting, if error to be reported to said source
10 occurs during the course of outputting the image data,
an error report describing a content of the error by a
character code corresponding to the detected language
type to the source address detected by said content
analyzing means.

15 [Claim 14] The apparatus according to claim 6,
wherein said data converting means further comprises a
first determining means for determining whether the
binary data portion is decodable by said decoding
means, and wherein said data converting means requests
20 the decoding to an external device if said first
determining means determines the binary data portion
is not decodable by said decoding means.

[Claim 15] The apparatus according to claim 6,
wherein said data converting means further comprises a
25 second determining means for determining whether said

data rasterizing means can rasterize the decoded
binary data, and wherein said data converting means
requests the decoding to an external device if said
second determining means determines the binary data
5 portion is not decodable by said decoding means.

[Claim 16] The apparatus according to any one of
claims 1 to 15, wherein the data contains image data
encoded in accordance with a facsimile transmission
standard.

10 [Claim 17] An image forming apparatus comprising
the communication apparatus according to any one of
claims 1 to 16.

[Claim 18] An image forming system comprising;
the communication apparatus according to any one
15 of claims 1 to 16; and
an image forming apparatus,
wherein the communication apparatus and the image
forming apparatus are connected so as to communicate
with each other.

20 [Technical Field]
[0001]

The present invention relates to a communication
apparatus capable of exchanging information between
electronic information media such as electronic mail
25 and word processor information and facsimile media.

[Background Art]

[0002]

Recently, with the spread of PCs (Personal
Computers) introduced into offices and homes, the
5 number of PCs connected to LANs and the Internet is
abruptly increasing, and consequently the population
using electronic mails and WWW (World Wide Web) is
dramatically increasing. At the end of 1997, the
number of users using the Internet exceeded 60,000,000,
10 and the rate of increase is 100% or more per year.
This shows the advent of age in which in addition to
transmitting means, represented by a facsimile
apparatus, for exchanging electronic paper information
using telephone lines, electronic data such as word
15 processor documents and spreadsheet documents to be
handled by computers can also be exchanged via LANs
and the Internet.

[0003]

As for a facsimile apparatus as a representative
20 apparatus for transmitting conventional document
information, the ratio of facsimile introduction to
offices in Japan exceeded 90%, indicating that the
market has ripened. However, the production of home
facsimile apparatuses shows a great growth tendency.
25 That is, the present day is the age in which

information transmission using electronic data and
information transmission by facsimile (paper) coexist.

[0004]

With this age as a background, a facsimile
5 apparatus or communication service as a contact
between electronic data information transmission and
facsimile information transmission is being sought.
This is an apparatus or service called, e.g., Internet
FAX that uses a facsimile apparatus as a document
10 reader, converts read facsimile image data into
electronic data such as electronic mail, and transmits
this electronic data to another Internet FAX apparatus,
PC, or facsimile apparatus via a LAN, the Internet, or
a public telephone line.

15 [0005]

Conventionally, electronic data handled by
Internet FAX (apparatus or communication service) is
exchanged between apparatuses as electronic mail data
based upon an electronic mail data format called MIME
20 (Multipurpose Internet Mail Extensions) recommended by
IETF (Internet Engineering Task Force), which is
formed by converting facsimile image data into TIFF
(Tagged Image File Format) as one image file format
and embedding it into electronic mail data. TIFF is
25 image data, rather than general word processor

document data or spreadsheet document data.

[0006]

[Problem to be Solved by the Invention]

The abovementioned conventional Internet FAX
5 (apparatus or communication service; the same shall
apply hereinafter) exchanges facsimile image data
using TIFF by embedding it into electronic mail.
Therefore, when non image data such as a word
processor document or a spreadsheet document formed by
10 a PC is added by electronic mail software on the PC
and sent to Internet FAX, the receiving Internet FAX
cannot interpret the data, such as a word processor
document or a spreadsheet document, that is handled by
the application software on the PC. Consequently, a
15 printer of the Internet FAX cannot automatically print
out the data, or it is impossible to convert the added
data into facsimile image data and simply and rapidly
send the data to a remote facsimile apparatus. These
problems are summarized as follows.

20 [0007]

(1) Cumbersome and time consuming operations

That is, when a PC user wishes to send a word
processor document or a spreadsheet document to
Internet FAX, he or she must perform complicated
25 operations of once converting the document into image

data to form a TIFF file on the PC and then adding
this TIFF file to electronic mail.

[0008]

(2) Large data size

5 If a user desires printing quality substantially
equivalent to printing of a word processor document or
a spreadsheet document on a PC, it is necessary to
rasterize the document into image data with a
resolution of about 400 DPI when a printer of the user
10 has 400 DPI. In this case, the data size (quantity)
of a TIFF file of the word processor document is
obviously larger than the data size of the word
processor document. This increases not only the
communication time but also the traffic on a LAN or
15 the Internet. Additionally, although the data size of
electronic mail data receivable by an electronic mail
server related to an electronic mail transfer system
depends upon the settings by the system manager, the
upper limit of this data size is about 1 Mbyte to
20 about 2 Mbytes. Therefore, the smaller the size of
electronic mail data to be transmitted, the higher the
possibility that the data is reliably transmitted to
the destination. Also, a TIFF file in Internet FAX
and the like contains facsimile image which is already
25 compressed using such as MH, MR, and MMR coding.

Therefore, additional file compression achieves little effect.

[0009]

(3) Unknown details of reception error

5 If electronic data cannot be normally received on
a communication session for receiving the data, the
reason of the error is reported using an error code
determined by the communication rules. With the
recent proliferation of the Internet and the recent
10 technological progress of communication apparatuses,
communication apparatuses are beginning to emerge
which can process various electronic data such as
electronic mails and can handle not only black and
white images but also multimedia such as color images
15 and sounds. However, it takes a considerable time for
a standardization party to stipulate error codes
determined by the communication rules. Also, error
codes determined by the communication rules cannot
completely report detailed information of error,
20 represented by the problem of the receiving capability
of receiving media.

[0010]

Furthermore, messages such as the reasons of
transmission errors of electronic data represented by
25 electronic mails are often informed in English. So,

it is not easy to understand the contents of these messages.

[0011]

An object of the present invention is to provide
5 a communication apparatus can solve the above-described problem, and to provide an image forming apparatus and an image forming system employing that communication apparatus.

[0012]

10 [Means for Solving the Problem]

The gist of the present invention is a communication apparatus for forming and outputting image data on the basis of received electric data, comprising: data analyzing means for analyzing, in the
15 case where non image data is received as the electric data, the content of the non-image data; and

[0013]

data converting means for converting, in response to the result of said data analyzing means, the non
20 image data into image data.

[0014]

[Embodiment(s)]

The present invention will be described in more detail below with reference to the accompanying
25 drawings. The following explanation will be made by

taking a hybrid machine having a network interface and including a copying function and a FAX function as an example of a communication apparatus according to the present invention. However, the present invention can
5 naturally be constituted by an apparatus having another arrangement.

[0015]

(Hardware Arrangement)

Fig. 1 shows the overall arrangement of the
10 hybrid system. A controller 2000 is connected to a scanner 2070 as an image input device and a printer 2095 as an image output device. This controller 2000 is also connected to a LAN 2011 and a wide area network (WAN) 2051 to input and output image
15 information and device information. A CPU 2001 is a general purpose processor for controlling the whole hybrid machine. A RAM 2002 is a system working memory with which the CPU 2001 operates. This RAM 2002 is also an image memory for temporarily storing image
20 data. A ROM 2003 is a boot ROM storing the boot program of the hybrid machine. An HDD 2004 is a hard disk drive storing system software and image data. An operation unit I/F 2006 is an interface with an operation unit (UI) 2012 and outputs, to the operation
25 unit 2012, image data to be displayed on the operation

unit 2012. The operation unit I/F 2006 also transfers information input by the user of this system to the CPU 2001. A modem 2050 connects with the WAN 2051 and inputs and outputs information. These devices are
5 arranged on a system bus 2007.

[0016]

An image bus I/F 2005 is a bus bridge which connects the system bus 2007 to an image bus 2008 for transferring image data at high speed and converts the
10 data structure. The image bus 2008 is constructed of a PCI bus or an IEEE 1394. The following devices are arranged on this image bus 2008. A network I/F 2010 connects the system bus 2007 to the LAN 2011 and inputs and outputs information. A raster image
15 processor (RIP) 2060 rasterizes PDL (Page Description Language) codes into a bit map image. A device I/F unit 2020 connects the scanner 2070 and the printer 2095 as image input/output devices to the controller 2000 and performs synchronous system/asynchronous
20 system conversion of image data. A scanner image processor 2080 corrects, processes, and edits input image data. A printer image processor 2090 corrects the printer and converts the resolution of the printer with respect to printed image data. An image rotator
25 2030 rotates image data. An image compressor/expander

2040 performs JPEG for multi valued image data and
JBIG, MMR, or MH for binary image data as a
compressing/expanding process.

[0017]

5 The arrangement as described above is separated
into a system bus 207 section and the image bus 2008
section by considering the extensibility of the image
processing portion. That is, a general computer
configuration is applied. In the above arrangement, a
10 general purpose I/F is used as the image bus I/F to
improve the degree of freedom with which arbitrary
image processing activities can be combined, and to
improve the extensibility in the future. In
particular, various standards may be proposed in the
15 future for the image compressing/expanding portion, so
this portion is connected to the image bus side so as
to be readily exchangeable.

[0018]

Fig. 2 shows the front external appearance of the
20 composite system. The scanner unit 2070 as an image
input device illuminates an original and scans a CCD
line sensor (not shown) to convert into an electrical
signal as raster image data. Originals are set in a
tray 2073 of an original feeder 2072. When the user
25 inputs a reading activation instruction from the

operation unit 2012, the controller CPU 2001 gives the instruction to the scanner 2070, and the feeder 2072 feeds originals one by one to read original images.

[0019]

5 The printer unit 2095 as an image output device converts raster image data 2096 into an image on a recording medium such as a paper sheet. Examples of the system are an electrophotographic system using a photosensitive drum or a photosensitive belt and an
10 ink jet system which forms images directly on a sheet by ejecting ink from a fine nozzle array, and any system can be used. Printing is started by an instruction from the controller CPU 2001. The printer unit 2095 has a plurality of supply stages so that
15 different recording medium sizes or different recording medium directions can be selected, and has corresponding cassettes 2101, 2102, 2103, and 2104. A paper delivery tray 2111 receives printed recording media.

20 [0020]

•Operation Unit

Fig. 3 shows the external appearance of the operation unit 2012. A touch panel sheet is pasted on an LCD of an LCD display unit 2013. This LCD display
25 unit 2013 displays a system operation screen and, when

a key displayed on the screen is pressed, transmits the corresponding position information to the controller CPU 2001. A start key 2014 is used to start reading an original image. Green and red LEDs
5 2018 are attached to the center of the start key 2014 and indicate whether the start key 2014 is usable by their respective colors. A stop key 2015 has a function of stopping an operation currently being executed. An ID key 2016 is used to input the user ID
10 of the user. A reset key 2017 is used to initialize settings from the operation unit.

[0021]

•Scanner Image Processing Unit

Fig. 4 shows the arrangement of the scanner image
15 processor 2080. An image bus I/F controller 2081 connects with the image bus 2008 to control its bus access sequence, controls individual devices in the scanner image processing unit 2080, and generates timings of these devices. A filter processor 2082 is
20 a spatial filter and performs convolution arithmetic operations. An editor 2083 finds a closed region surrounded by a marker pen from input image data and performs image processing, such as shading, halftoning, or negative to positive inversion, for the image data
25 in the closed region. A magnification processor 2084

performs interpolation arithmetic operations in a main scan direction of a raster image to enlarge or reduce the image, when the resolution of the read image is to be changed. The magnification in a sub scan direction is changed by changing the rate at which an image read line sensor (not shown) is scanned. A table converter 2085 performs table conversion for converting image data as read luminance data into density data. A binarization processor 2086 binarizes multi valued gray scale image data by an error diffusion process or a screen process.

[0022]

The processed image data is again transferred onto the image bus via the image bus controller 2081.

[0023]

•Printer Image Processor

Fig. 5 shows the arrangement of the printer image processor 2090. An image bus I/F controller 2091 connects with the image bus 2008 to control its bus access sequence, controls individual devices in the printer image processor 2090, and generates timings of these devices. A resolution converter 2092 converts the resolution of image data received from the LAN 201 or the WAN 2051 into the resolution of the printer 2095. A smoothing processor 2093 smoothes jaggy

(staircasing appearing in a black to white boundary such as an oblique line) of the resolution converted image data.

[0024]

5 •Image Compressor/Expander

Fig. 6 shows the arrangement of the image compressor/expander 2040. An image bus I/F controller 2041 connects with the image bus 2008 to control its bus access sequence, controls timings of data exchange
10 with an input buffer 2042 and an output buffer 2045, and controls mode settings for an image compressing/expanding unit 2043. In the present invention, data compression is handled as encoding, and data expansion is handled as decoding. The
15 procedure of this image compressor/expander will be described below.

[0025]

The CPU 2001 performs setting for image compression control in the image bus I/F controller
20 2041 via the image bus 2008. By this setting, the image bus I/F controller 2041 performs setting (e.g., MMR compression or JBIG expansion) necessary for image compression for the image compressing/expanding unit 2043. After the necessary setting, the CPU 2001
25 permits the image bus I/F controller 2041 to transfer

image data. In accordance with this permission, the image bus I/F controller 2041 starts transferring image data from the RAM 2002 or from any device on the image bus 2008. The input buffer 2042 temporarily
5 stores the received image data and transfers the image at a constant speed in accordance with an image data request from the image compressing/expanding unit 2043. During this transfer, the input buffer checks whether image data transfer is possible between the image bus
10 I/F controller 2041 and the image compressing/expanding unit 2043. If the image data read from the image bus 2008 or the image write to the image compressing/expanding unit 2043 is impossible, the input buffer performs control (to be referred to
15 as a handshake hereinafter) so that no data transfer is performed.

[0026]

The image compressing/expanding unit 2043 temporarily stores the received image data into a RAM
20 2044. This is because when image compression is to be performed, data of several lines is necessary depending on the type of image compressing process, and the first line cannot be compressed unless the image data of several lines is prepared. The
25 compressed image data is immediately transferred to

the output buffer 2045. The output buffer 2045
handshakes with the image bus I/F controller 2041 and
the image compressing/expanding unit 2043, and
transfers the image data to the image bus I/F
5 controller 2041. The image bus I/F controller 2041
transfers the transferred compressed (or expanded)
image data to the RAM 2002 or to any device on the
image bus 2008. The series of these processes are
repeated until no further process request is output
10 from the CPU 2001 (when the necessary number of pages
are completely processed), or until this image
compressor/expander outputs a stop request (e.g., when
error occurs during compression or expansion).

[0027]

15 •Image Rotator

Fig. 7 shows the arrangement of the image rotator
2030. An image bus I/F controller 2031 connects with
the image bus 2008 to control its bus sequence, sets a
mode and the like in an image rotating unit 2032, and
20 controls timings for transferring image data to the
image rotating unit 2032. The procedure of this image
rotator will be described below.

[0028]

The CPU 2001 performs setting for image rotation
25 control in the image bus I/F controller 2031 via the

image bus 2008. By this setting, the image bus I/F controller 2031 performs setting (e.g., the image size and the direction and angle of rotation) necessary for image rotation in the image rotating unit 2032. After
5 the necessary setting, the CPU 2001 permits the image bus I/F controller 2031 to transfer image data. In accordance with this permission, the image bus I/F controller 2031 starts transferring image data from the RAM 2002 or from any device on the image bus 2008.
10 Assume that the width of the image bus 2008 is 32 bits, the image size for rotation is 32 x 32 (bits), and image data is transferred to the image bus 2008 in units of 32 bits (images to be handled are binary images).
15 [0029]

To obtain an image of 32 x 32 (bits) as described above, it is necessary to perform the aforementioned unit data transfer 32 times and transfer image data from discontinuous addresses (Fig. 8). The image data
20 transferred by discontinuous addressing is written in the RAM 2033 so that the data is rotated through a desired angle when read out. For example, in 90°counterclockwise rotation, 32 bit image data transferred first is written in a Y direction as shown

in Fig. 9. The image is rotated as it is read out in an X direction.

[0030]

When the 32 x 32 (bits) image rotation (write to
5 the RAM 3032) is complete, the image rotating unit
2032 reads out the image data by the abovementioned
reading method and transfers the image to the image
bus I/F controller 2031.

[0031]

10 The image bus I/F controller 2031 that has
received the rotated image data transfers the data to
the RAM 2002 or to any device on the image bus 2008 by
discontinuous addressing. The series of these
processes are repeated until no further process
15 request is output from the CPU 2001 (when the
necessary number of pages are completely processed).

[0032]

•Device I/F Unit

Fig. 10 shows the arrangement of the device I/F
20 unit 2020. An image bus I/F controller 2021 connects
with the image bus 2008 to control its bus access
sequence, controls individual devices in the device
I/F unit 2020, and generates timings of these devices.
The image bus I/F controller 2021 also generates
25 control signals to the external scanner 2070 and the

printer 2095. A scan buffer 2022 temporarily stores
image data supplied from the scanner 2070 and outputs
the image data in synchronism with the image bus 2008.
A serial parallel/parallel serial converter 2023
5 arranges in order, or decomposes, the image data
stored in the scan buffer 2022, thereby converting
into the data width of image data transferable to the
image bus 2008. A parallel serial/serial parallel
converter 2024 decomposes, or arranges in order, the
10 transferred image data from the image bus 2008,
thereby converting into the data width of image data
storable in a print buffer 2025. The print buffer
2025 temporarily stores image data supplied from the
image bus 2008 and outputs the image data in
15 synchronism with the printer 2095.

[0033]

The procedure of image scan will be described
below. Image data supplied from the scanner 2070 is
stored in the scan buffer 2022 in synchronism with a
20 timing signal from the scanner 2070. If the image bus
2008 is a PCI bus, when 32 bits or more of the image
data are stored in the buffer, 32 bits of the image
data are transferred, in a first in first out manner,
from the buffer to the serial parallel/parallel serial
25 converter 2023. This image data is converted into 32

bit image data which is in turn transferred onto the image bus 2008 via the image bus I/F controller 2021. If the image bus 2008 is an IEEE 1394, the image data in the buffer is transferred, in a first in first out
5 manner, from the buffer to the serial parallel/parallel serial converter 2023. This image data is converted into serial image data which is in turn transferred onto the image bus 2008 via the image bus I/F controller 2021.

10 [0034]

The procedure of image printing will be described below. If the image bus 2008 is a PCI bus, the image bus I/F controller receives 32 bit image data supplied from the image bus and transfers the image data to the
15 parallel serial/serial parallel converter 2024. This image data is decomposed into image data having the number of input data bits of the printer 2095, and the decomposed data is stored in the print buffer 2025. If the image bus is an IEEE 1394, the image bus I/F
20 controller receives serial image data supplied from the image bus and transfers the image data to the parallel serial/serial parallel converter 2024. This image data is decomposed into image data having the number of input data bits of the printer 2095, and the
25 decomposed data is stored in the print buffer 2025.

In synchronism with a timing signal supplied from the printer 2095, the image data in the buffer is transferred to the printer 2095 in a first in first out manner.

5 [0035]

(System Configuration)

Fig. 11 is a view of a network system configuration showing a connection relationship and data exchange between devices when the communication apparatus of this embodiment is connected to other
10 devices.

[0036]

A communication apparatus 148 is connected to electronic mail clients 141 and 146, a local
15 electronic mail server 142, a DNS server 143, and a rasterization server apparatus 1416 via the LAN 2011. A router 1412 is connected to the LAN 2011. Via this router 1412, the communication apparatus 148 can communicate with a remote electronic mail server 1414
20 and an Internet FAX apparatus 1415 connected to another network such as an Internet/Intranet 1413. The communication apparatus 148 can also communicate with a FAX apparatus 1411 via a public line 1410, such as PSTN (Public Switching Telephone Network)/ISDN, in
25 addition to the LAN 2011.

[0037]

Electronic mail transmitted to the communication apparatus 148 from the remote electronic mail server 1414 or the electronic mail client 141 or 146 is
5 received by the local electronic mail server 142 and transferred to the communication apparatus 148. If the electronic mail data received by the communication apparatus 148 contains an attached file which can be rasterized only by the rasterization server apparatus
10 1416, the communication apparatus 148 requests the rasterization server apparatus 1416 to convert binary data of this attached file into data (e.g., TIFF binary data, binary data encoded by ITU-T recommendation T.4 or image data encoded by a
15 predetermined encoding method such as JPEG etc) of a format which can be handled by the communication apparatus 148. Details of the communication between the rasterization server apparatus 1416 and the communication apparatus 148 will be described later.

20 [0038]

(Software)

The operation of this embodiment will be described below.

[0039]

Fig. 12 is a view showing an example of electronic mail data to which non image data, such as a word processor document or a spreadsheet file is attached as an attached file. That is, Fig. 12 shows the contents of electronic mail data described in MIME format.

[0040]

As shown in Fig. 12, this electronic mail data is composed of a header part 91 in which a source, a destination, a title, and type (style) information of mail are described, a text part 92 in which a mail document is described, and an attached file part 93 in which encoded electronic data is described. These parts are delimited by characters (---Boundary--- in Fig. 12) indicating boundaries. In a header portion (part start portion) of each part, character code information, an encoding method, and the file name of the part are described.

[0041]

Fig. 13 is a view showing the data structures of electronic data management tables used in storage, conversion, and printing of electronic data in the communication apparatus of the present invention.

[0042]

An ID management table 213 has areas of a reception number counter, document ID counter, and transaction ID counter, and generates a reception number, document ID number, and transaction ID number.

5 [0043]

An electronic data converting transaction management table 21 is acquired when data of received electronic mail is to be analyzed, and stores the IDs generated by the ID management table 21 and various
10 pieces of information extracted from the header of the electronic mail. A document management table pointer of this electronic data converting transaction management table 21 indicates the start position of a first document management table acquired in the
15 transaction.

[0044]

Document management tables 23 to 25 are tables obtained for each part of electronic mail data, and have areas for diverse pieces of information set in
20 accordance with the contents of each part. Each document management table has a next point area for indicating the start position of a document management table corresponding to the next part. This next point area is a NULL pointer in a document management table
25 (25) corresponding to the final part. Each document

management table has an original document area 22, an error report document area 28, and a last document to be converted area 29.

[0045]

5 Page management tables 210 to 212 have, as will be described later, an area for storing information necessary to manage received rasterized document data. Similar to the document management tables, these page management tables are linked by pointer areas.

10 [0046]

 These tables are stored and rasterized, where necessary, in a device such as the RAM 2002 or the HDD 2004 that the CPU 2001 can read and write.

[0047]

15 When reception of electronic data (particularly electronic mail) from the LAN 2001 or the WAN 2051 is started, the CPU 2001 acquires (an area of) the electronic data converting transaction management table 21 in a specific area of the HDD 2004 or the RAM
20 2002. Simultaneously, the value of the "transaction ID counter" area in the ID management table 213 is incremented and set in the "transaction ID" area of the electronic data converting transaction management table 21. Analogously, the value of the "reception
25 number counter" area in the ID management table 213 is

incremented and set in the "reception number" area of the electronic data converting transaction management table 21.

[0048]

5 Multimedia data of electronic mail described in MIME as shown in Fig. 12 is divided or broken up in units of media segments by an electronic data delimiting process (Figs. 17 to 20) and a content type analyzing process (Fig. 21). The document management
10 tables 23, 24, and 25 corresponding to these media segments are acquired. While data is set in these tables, a queue of document management tables starting from the "document management table pointer" in the electronic data converting transaction management
15 table 21 is formed. Information concerning each segment data is set around the "original document" area 22 in the document management table.

[0049]

 The operation will be described by taking the
20 mail shown in Fig. 12 as an example. The header part 91 is linked as the first document management table 23. "Text" is set in the "document type" area of this table, and "ASCII" is set in the "language type" area of the table. The text part 92 of the mail is linked
25 as the second document management table 24. "Text" is

set in the "document type" area of this table, and
"Japanese S JIS" is set in the "language type" area of
the table. The remaining attached file part 93 is
linked as the third document management table 25.

- 5 "Encoded text" representing data obtained by encoding
binary codes such as UUENCODE into text is set in the
"document type" area of this table.

[0050]

- Whenever a new document management table is
10 acquired, the value of the "document ID counter" area
is incremented and set in the "document ID" area of
the acquired document management table.

- Simultaneously, the value of the "reception number"
area in the electronic data converting transaction
15 management table 21 is copied to the "reception
number" area. Also, a value incremented in order from
1 each time a management table is acquired is set in
the "document order number" area of the document
management table.

- 20 [0051]

- In a "presence/absence of conversion during
receiving session" area of the document management
table, "convert" and "do not convert" can be switched
for each of various converting processes during
25 reception in accordance with the time of a converting

process such as conversion of image data of received data during reception, and with the allowable time from completion of the reception of the received data to return of a response in the receiving session.

5 [0052]

Accordingly, optimization can be readily performed by using, e.g., system parameters in accordance with the allowable time of response to the received data during the receiving session.

10 Additionally, by only setting information "form" or "do not form" in a "presence/absence of error report formation" area of the document management table, whether an error report (character string or image data) is to be formed can be easily changed.

15 [0053]

Fig. 14 is a sequence diagram pertaining to a data converting process and the document type after the conversion. This data converting process is necessary to discriminate the data contents of the electronic mail data in Fig. 12, determine the document type, and output the data from the printing device of this communication apparatus or perform FAX transmission or the like.

[0054]

The process flow in the present invention will be described below with reference to Figs. 12 and 14.

The flow starts from "START". Since data "Content Transfer Encoding" exists in the attached
5 file part 93 of the electronic mail data, the "document type" of the attached file part 93 is discriminated as "encoded text". Also, "x uuencode", "Content Type", "text/plain", and "name" exist in this attached file part. Hence, to finally print out the
10 data in the communication apparatus of the present invention, the following process flow is necessary:

[0055]

- 1) Convert "contents of report.doc encoded by uuencode" as text data of the attached file part 93
15 into binary data by uudecode.

- 2) Print out by word processor software on the rasterization server apparatus and convert into "TIFF binary" data interpretable by the communication
20 apparatus of the present invention by a printer driver on the rasterization server apparatus.

- 3) Transmit the "TIFF binary" data to the communication apparatus of the present invention from
25 the rasterization server apparatus.

If a file of another type is attached, e.g., if the attached file part 93 contains data formed by converting an image file such as JPEG into text, necessary processing is performed on the basis of
5 information of the MIME header. Details of the sequence view shown in Fig. 14 will be described later in the explanation of the data delimiting process shown in Figs. 17 to 20.

[0056]

10 Fig. 15 is a diagram showing a protocol sequence when in the network configuration shown in Fig. 11, the communication apparatus 148 of this embodiment receives electronic mail sent by the electronic mail account 141 from an electronic mail apparatus such as
15 the local electronic mail server 142. In this embodiment, transmission and reception of electronic mails are done by SMTP (Simple Mail Transfer Protocol).

[0057]

First, the electronic mail apparatus transmits a
20 connection request to the communication apparatus by using the port number 25 as a listener port of SMTP (S13). When receiving this connection request, the communication apparatus activates an electronic mail receiving process as an SMTP demon for electronic mail
25 reception, and returns a normal response (S14). Then

the electronic mail apparatus transmits the host name
("MailFaxMachine") of the communication apparatus
(S15). If the received host name is in agreement with
the host name assigned to the communication apparatus,
5 the communication apparatus returns a normal response
(S16).

[0058]

The electronic mail apparatus transmits the
sender address ("username1@mail_srv.ccc.dd.ee") of
10 electronic mail (S17). Upon receiving the address,
the communication apparatus returns a normal response
(S18). In response to this, the mail apparatus
transmits the destination address
("mail_fax_machine@MailFaxMachine.ccc.dd.ee") of the
15 mail (S19). The communication apparatus checks
whether the destination is this communication
apparatus and mail transfer is unnecessary. Since
transfer is unnecessary in this example, the
communication apparatus returns a normal response to
20 the mail apparatus (S110).

[0059]

Next, the electronic mail apparatus transmits
mail data transfer start information (S111). When
receiving this information, the communication
25 apparatus performs operations such as initialization

necessary for electronic mail reception and returns a normal response (S112). In response to this, the mail apparatus transmits electronic mail data (S113) and, when the transmission is over, subsequently transmits
5 electronic mail transmission end information (S114). When receiving this end information, the communication apparatus performs terminating work, e.g., closes the reception file of the electronic mail data, and returns a normal response (S115).

10 [0060]

If the number of mails to be transmitted is one, the mail apparatus transmits transmission end information (S116). When receiving a normal response (S117) from the communication apparatus, the mail
15 apparatus transmits a port disconnection request (S118), thereby terminating the mail transmission session.

[0061]

Fig. 16 is a flow chart showing the flow of the
20 whole electronic data receiving procedure, performed by the communication apparatus of the present invention, from electronic data reception to error report mail transmission through conversion and electronic mail data printing.

25 [0062]

The overall operation of the communication apparatus of this embodiment will be described below with reference to Fig. 16.

The communication apparatus waits for the arrival
5 of electronic data (S1513). If an external apparatus sends a port connection request by TCP/IP, the communication apparatus discriminates the port number (S1514). If the port number is not 25 (the port number for requesting connection by SMTP), the
10 communication apparatus performs other data processing (S158) and returns to the electronic data arrival waiting state.

[0063]

Upon receiving the request of connection to the
15 port 25, the communication apparatus executes the aforementioned mail reception protocol sequence (Fig. 15, S14 to S114) (S151). In this receiving process, if the communication apparatus receives the mail data transfer start information (S111), the apparatus
20 secures a file for electronic mail reception and initializes the management table data (e.g., sets the name of the file for electronic mail reception into an "electronic data•path•file name" area of the electronic data converting transaction management
25 table 21). When receiving "." and carriage as a mail

data end delimiter which is the electronic mail data transmission end information (Fig. 15, S114) (S1515), the communication apparatus closes the reception file of the electronic mail data.

5 [0064]

Next, the communication apparatus performs an electronic data delimiting process (S152) and checks whether the electronic mail contains data which cannot be rasterized in the communication apparatus and hence
10 requires a rasterization request to the rasterization server (S1516). More specifically, the communication apparatus checks whether "present" is in a "presence/absence of external processing" area of any of the document management table queues 23, 24, and 25
15 linked from the electronic data converting transaction management table 21 and corresponding to individual parts of the mail data. If data requiring the rasterization server 1416 is found, the communication apparatus links association to the server 1416 by
20 using TCP/IP and sends a "server operation confirmation" command (S153). If a response is received within a defined time and the response is not a "busy response" (S1517), the flow advances to a divided document converting process (S154). If no
25 data requiring the rasterization server is found, the

flow directly advances to the divided document
converting process (S154).

[0065]

The communication apparatus then checks whether
5 the divided document converting process terminates
normally (S1518). If the process terminates normally,
the communication apparatus returns a normal response
(Fig. 15, S115), with respect to the electronic mail
data transmission end information, to the electronic
10 mail apparatus on the transmission side (S159). The
communication apparatus performs a session terminating
process (S1510) corresponding to steps S116 to S118 in
Fig. 15.

[0066]

15 When the mail receiving process is complete, the
communication apparatus prints out the received data
(S1511). In step S1512, the communication apparatus
transmits data formed by converting the received
electronic mail data into FAX data to a desired
20 destination by FAX transmission.

As a method of designating the FAX destination
from the source, the following methods are possible:

(1) Method of designating by header part

The FAX number of the destination is added to the
25 header part of electronic mail data, e.g., added after

the title (Sub:) of the mail. That is, in the electronic mail data shown in Fig. 12, the FAX number is designated like Investigation Report (FAX03 3756 1234). Alternatively, the FAX number is designated
5 like "TO: FAX03 3756 1234@xxxx.yyyy.zzzz" in the destination address. However, when the FAX number is to be designated in the header part, the number must be previously set to prevent the communication apparatus from detecting an error in mail reception.

10 (2) Method of designating in text part

A description of the telephone number, e.g., "FAXNO = 03 3756 1234" is added to the text part 92.

In either method, the number is detected in the electronic data delimiting process in step S151. The
15 detected number is extracted, stored in a predetermined area of the RAM 2002 or the HDD 2004, and read out and used in step S1512.

To extract the number in method (1), a character string "FAX (and numerals)" is extracted from a
20 character string after "Sub:" or "FROM:". To extract the number in method (2), a line starting from "FAXNO=" is searched for, and a string of numerals following this line is extracted.

[0067]

On the other hand, if the divided document converting process (S154) terminates abnormally in step S1518, instead of returning a normal response in step S159, the communication apparatus returns error
5 to the electronic mail apparatus as the main source at the timing in step S115 of Fig. 15 (S155). The communication apparatus receives "communication end information" from the electronic mail apparatus (Fig. 15, S116) and returns a response (Fig. 15, S117),
10 thereby terminating the session (S156). After that, the communication apparatus extracts the source address by searching for the pattern "From: aaaaa@xxxx.yyyy.zzzz" from the file recorded in the "electronic data•path•file name" area of the
15 electronic data converting transaction management table 21, and sends electronic mail of the "error report" already formed during the divided document converting process to the source electronic mail address "aaaaa@xxxx.yyyy.zzzz" (S157).

20 The divided document converting process in step S1520 and S1521 is executed when the document converting process is not completely performed during the received data processing. When the whole converting process is complete, the flow advances to
25 the next step without performing anything.

[0068]

Details of the electronic data delimiting process shown in step S152 of Fig. 16 will be described with reference to Figs. 13 and 17 to 20. In the following
5 description, the electronic mail data in MIME format shown in Fig. 12 is reception data.

[0069]

Figs. 17 to 20 are flow charts showing details of the electronic data delimiting process.

10 First, a new document management table 23 is acquired and linked to the "document management table pointer" of the electronic data converting transaction management table 21 (to be referred to as a transaction management table hereinafter). Whenever a
15 new document management table is acquired, the value of the "document ID counter" in the ID management table 213 is incremented and set in the "document ID" area of the acquired document management table. At the same time, the value of an area having the same
20 name in the transaction management table 21 is copied to the "reception number" area in the document management table. Also, a value incremented in order from 1 each time a new management table is acquired is set in the "document order number" area of the
25 document management table.

[0070]

Next, a file having the name recorded in the "electronic data•path•file" area of the transaction management table 21 is opened, and search is performed line by line from the first line (S34). If both of "end of file?" (S331) and "blank line?" (S332) are NO, whether "Content Type:" exists in the beginning of the line is checked (S333). If all the check results in steps S331 to S333 are NO, the next line is similarly checked. In the electronic mail data shown in Fig. 12, all the check results in steps S331 to S333 are NO up to the fourth line. Since "Content Type:" exists in the fifth line, the flow advances to a content type analyzing process (S35) from step S333.

[0071]

Details of this content type analyzing process will be described below with reference to Fig. 21. Fig. 21 is a flow chart showing details of the content type analyzing process shown in Figs. 17 to 20. First, a character string following "Content Type:" in the electronic mail data is searched for (S42). If the character string is "text/plain;" (S411), a character string following this character string is further searched for (S46). If this character string is "charset=" (S414), the next character string is

analyzed (S47). Data representing the language type
is set in the "language type" area of the
corresponding document management table, and "text" is
set in the "document type" area in the "original
5 document" area of the same table. If the character
string analysis indicates that the language type
cannot be determined or the language cannot be
processed because there is no corresponding font
(S415), "language error" is set in the "process
10 result" area of the document management table (S48),
and the content type analyzing process is completed.
[0072]

If the language is processable, "absent" is set
in the "presence/absence of external processing" of
15 the document management table and "CG rasterization +
TIFF file formation" is set in the "document
converting process content" area of the same table
(S410), and the content type analyzing process is
completed.

20 [0073]

If the character string following "Content Type:"
is not "text/plain", whether this character string is
"Multipart/Mixed;" is checked (S412). If YES in step
S412, "boundary=" is searched for (S43). A character
25 string in double quotation marks ("") next to

"boundary=" is set in the "delimiting character string" area of the electronic data converting transaction work area 214 (S44), and the content type analyzing process is completed.

5 [0074]

If NO in steps S42 and S412, i.e., the character string following "Content Type:" is neither "text/plain;" nor "Multipart/Mixed;", whether the character string is "image/tiff;" or "image/jpeg;" is
10 checked in steps S416 and S417. If YES in step S416 or S417, "absent" is set in the "presence/absence of external processing" area of the document management table and "TIFF binary" (in the case of "image/tiff;") or "JPEG binary" (in the case of "image/jpeg;") is set
15 in the "document type" area of the same table (S49), and the content type analyzing process is completed.
[0075]

If NO in both steps S416 and S417, error is set in the "process result" area of the document
20 management table (S45), and the content type analyzing process is completed.
[0076]

In this embodiment, the character string following "Content Type:" in the mail data shown in
25 Fig. 12 is "Multipart/Mixed;". Therefore, the

character string "boundary=" is further searched for
in step S43. In step S44, a character string "---
Boundary---" in double quotation marks ("") next to
"boundary=" and found on the sixth line is stored as a
5 delimiting character string in the "delimiting
character string" area of the electronic data
converting transaction work area 214. In this manner,
step S35 ends, and the flow returns to processing of
the next line.

10 [0077]

Next, the ninth line of the mail data is found as
a blank line. Therefore, the file position of the
header part 91 of the electronic mail data is set in a
"valid data start•end offset" area of the "original
15 document area 22 of the corresponding document
management table 23. Also, data in the "electronic
data•path•file name" of the transaction management
table 21 is copied to a "document path•file name" area
in the same area. Subsequently, the range of the
20 character string indicated by the header part 91 is
set as header character string information in a
"document profile" area of the same area (S36).

[0078]

It is checked whether the "process result" area
25 in the "original document" area 22, which shows the

result of the content type analyzing process for the header part 91 in step S35, is error (S334). If NO in step S334, it is checked whether the delimiting character string is set in the "delimiting character string" area of the electronic data converting transaction work area 214 (S335). Since, as described above, the content type analyzing process for the header part 91 is normally performed and the delimiting character string "---Boundary---" is already set, the next character string is searched for (S37).

[0079]

In step S336, whether the next line is "end of file" is checked. Since the next line is the first line of the text part and hence is not "end of file", the flow advances to step S337 to detect a delimiting character string. Since the first line of the text part 92 is a delimiting character string, the flow advances to step S38 in Fig. 18 to further search for the next character string. The next character string is not the end of the file (S342), so the flow advances to step S39. In step S39, a new document management table 24 for the text part 92 is acquired, initialized, and linked to the end of the document management table 23 already acquired for the header

part 91 by using the "next pointer" area of the document management table 23.

[0080]

Next, a character string "Content Transfer
5 Encoding" is searched for (S344), and a character
string "Content Disposition" is searched for (S346),
but neither is found. Since "Content type:" is found
(S347), the same content type analyzing process as in
step S35 described earlier is performed. A character
10 string following "Content type:" in the text part 92
is "text/plain;charset=iso 2022 jp", so the process is
executed in the order of S411 -> S414 -> S47 -> S48.
"Text" is set in the "document type" area of the
document management table 24, and "Japanese S JIS" is
15 set in the "language type" area. After that, the flow
returns to step S343.

[0081]

The processing from step S343 is repeatedly
executed for each line. When the last line of the
20 text part 92 is reached, a blank line (meaning the end
of the header information) is detected in step S343,
and the flow advances to step S317. This step S317 is
analogous to step S36 described above; data in the
"electronic data•path•file name" area of the
25 transaction management table 21 is copied to the

"document path•file name" area in the "original document" area of the document management table 24, and header character string information from the start line ("---Boundary---" line) to the last line (blank line)) in the text part 92 is set in the "document profile" area of the "original document" area in the document management table 92. Since the "process result" area in the document management table 24, which indicates the result of the content type analyzing process in step S320, does not contain data indicative of error (S348), the flow advances to step S312 to search for the next character string.

[0082]

As a result of this search, the first delimiting symbol in the attached file part 93 is detected in step S341. In step S313, the file position of the text part 92 is set in the "valid data start•end offset" area of the "original document" area in the document management table 24.

[0083]

The flow advances to step S38. Since the next character string is not "end of file" in step S342, the flow advances to step S39. In step S39, a new document management table 25 for the attached file part 93 is acquired, initialized, and linked to the

end of the document management table 24 already
acquired for the text part 92 by using the "next
pointer" area of the document management table 24. In
step S344, the character string "Content Transfer
5 Encoding:" is detected. A character string indicating
the encoding method, following this character string,
is "uuencode" which can be processed by the
communication apparatus of the present invention or by
the rasterization server apparatus. Therefore, in
10 step S311 "encoded text" is set in the "document type"
area of the document management table 25, and the
processing is continued. In processing of the next
line, "Content Type:" is detected in step S347, so the
flow advances to the content type analyzing process in
15 step S320. Since the character string following
"Content Type:" is "text/plain;" and the subsequent
character string is not "charset=", the analyzing
process is terminated only by performing the
processing S411 . S414, and the flow returns to
20 processing of the next line.

[0084]

In this embodiment, pieces of information such as
encoding methods, extensions, and language types which
can be processed by the communication apparatus 148
25 and by the external rasterization server 1416 are

previously stored in the internal nonvolatile storage devices, such as the ROM 2003 and the HDD 2004, of the control unit 2000 of the communication apparatus 148. On the basis of these pieces of information, necessary judgements can be made.

[0085]

In step S346, "Content Disposition:" on the fourth line of the attached file part 93 is found. The flow advances to step S330 of Fig. 19 to set "computer processable binary" in the "document type" area of the document management table 25. In step S321, a character string "report.doc" following "filename=" and indicating the file name is extracted. The type of file is analyzed on the basis of the extension and the like of the extracted file name (S322). The extension is ".doc" in the example shown in Fig. 12. In this embodiment, files having this extension ".doc" can be rasterized only by external rasterization servers. Hence, NO is determined in step S350, YES is determined in step S351, and "present" is set in the "presence/absence of external processing" area of the document management table 25 (S324). After that, the flow returns to step S343 in Fig. 18. If the extension ".doc" can be rasterized in the communication apparatus 148, YES is determined in

step S350, and the flow returns to step S343 of Fig. 18 to continue processing of the next line. If the extension cannot be rasterized in both the communication apparatus 148 and the rasterization server 1416, NO is determined in step S351, and data indicative of "receiving capability error" is set in the "process result" area of the document management table 25 corresponding to the attached file part 93 (S325). After that, the flow returns to step S343 of Fig. 18 to continue processing of the next line.

[0086]

When the file "report.doc" converted into text format by uuencode is completely processed, a blank line immediately before the last line of the attached file part 93 is detected in step S343. In step S317, data in the "electronic data•path•file name" of the transaction management table 21 is copied to the "document•path•file name" in the "original document" area of the document management table 25. Also, header character string information from the start line ("---Boundary---" line) to the last line (blank line) of the attached file part 93 is set in the "document profile" area of the "original document" area in the document management table 25. Since the "process result" area in the document management table

25, which indicates the result of the content type analyzing process in step S320, does not contain data indicative of error (S348), the flow advances to step S312 to search for the next line.

5 [0087]

In step S341, a delimiting character string of the next line of the attached file part 93 is detected, and the flow advances to step S313. In step S313, the file position of the attached file part 93 is set in
10 the "valid data start•end offset" area of the "original document" area in the document management table 25, and the flow advances to step S38. In step S342, "end of file" is detected, and the electronic data delimiting process is completed.

15 [0088]

On the other hand, if "end of file" is detected in step S331, the flow advances to step S326 of Fig.
20. "CG rasterization + TIFF file formation" is set in the "document converting process content" area of
20 the "original document" area 22 in the document management table 23 (S326). "Absent" is set in the "presence/absence of external processing" area of the document management table 23 (S327). Additionally, "text" is set in the "document type" area of the table
25 23, data in the "electronic data•path•file name" area

of the transaction management table 21 is copied to the "document•path•file name" area, and "from the start position (or a position next to a blank line) to the electronic data size end position (or a position
5 before a blank line before the next delimiting character string)" is set in the "valid data start•end offset" area (S328).

[0089]

Whether the "process result" area of the table 23
10 which indicates the content type analyzing process result contains data indicative of error is checked (S360). If no error is found, the document delimiting process is completed.

[0090]

15 If "end of file" is detected in step S336 or S340, the flow advances to step S314 in Fig. 20. In step S314, data indicating "delimiting position error" is set in the "process result" area of the corresponding document management table. After that, the processing
20 from step S327 described above is performed.

[0091]

If the content type analyzing process in steps S35 and S320 terminates with error, data for error report formation is set in the "document converting
25 process content" area of the document management table

in step S318, as in step S329. This data is used to form an error report (to be described later).

[0092]

Fig. 23 is a flow chart for explaining details of the divided document converting process explained as step S154 in Fig. 16.

[0093]

First, in step S52 a reference point of a current document management table is placed in the start position of the document management table 23, which is indicated by the "document management table pointer" area in the transaction management table 21. Since the next document management table 24 exists, YES is determined in step S510. In step S53, the current document conversion management table is set in the "original document" area of the document management table 23. Since the next document conversion management table 28 exists, YES is determined in step S511, and the flow advances to step S54. In step S54, an original document converting process (to be described in detail later) is performed.

[0094]

Next, the current document conversion management table is set to the next document conversion management table linked to the original document area

22 in the document management table 23 (S55). The original document converting process in step S54 is repeated to the end of the linked table queue, and the flow advances to step S56. The current document
5 conversion management table is set in the "error report document" area 28 of the document management table (S56), and error report document conversion (to be described later) is performed (S58). This error report document conversion in step S58 is repeated to
10 the end of a document conversion management table queue linked to the "error report document" area 28 by using the next document conversion management table as a reference point. When the table queue is completely processed to the end, NO is determined in step S512,
15 and the reference point of the document management table is switched to the next document conversion management table (S57). When the above processing is completely performed for all document management tables, NO is determined in step S510, and the divided
20 document converting process is completed.

[0095]

Figs. 24 to 30, 29, 30, and 31 are flow charts showing details of functions called in the original document converting process (S54) and the error report
25 document converting process (S58) of Fig. 23.

Conversion control operates in accordance with the state transition in Fig. 22. The basic control is as follows. Conversion is executed after a document converting process table for output, for storing converted output data, is acquired in each step of the conversion. When the conversion is complete, the converted data at the output is data to be converted by the next conversion, and a document converting process table for outputting that data is secured and linked.

[0096]

Fig. 22 is a state transition diagram for controlling the divided document converting process shown in Figs. 24 to 30. The meanings of individual states are as follows:

[0097]

"Wait until conversion completion in preceding stage (1101)"...a state in which completion of a converting process in the preceding stage is waited for.

"IDLE (1102)"...a state in which preparations (settings of conversion parameters) for a converting process can be started.

"Information setting completed (1103)"...a state in which the preparations (settings of conversion

parameters) for the converting process are completed and the control advances to the converting process. "Conversion completed (1105)"...a state in which the converting process is completed.

5 "Processing after error in progress (1104)"...a state in which the converting process terminates with error and a preparing process for "error report" formation as post processing is being performed.

[0098]

10 To more clearly explain the divided document conversion, a divided document converting process executed after the electronic mail data shown in Fig. 12 is received and the electronic data delimiting process shown in Figs. 17 to 20 and 21 is executed
15 will be described below with reference to Figs. 23, 24 to 30, 29, 30, and 31.

Prior to the explanation, the connection relationship between management data after the electronic mail data shown in Fig. 12 is received and
20 the aforementioned electronic data delimiting process and content type analyzing process are executed will be described below with reference to the data structure of the electronic data management table shown in Fig. 13.

25 [0099]

The header part 91 is linked as the first document management table 23 to the electronic data converting transaction management table 21. "Text", "ASCII", and "IDLE" are set in the "document type" area, the "language type" area, and the "document converting process status" area, respectively.

5

[0100]

The text part 92 is linked as the second document management table 24 to the document management table 23. "Text", "Japanese S JIS", and "IDLE" are set in the "document type" area, the "language type" area, and the "document converting process status" area, respectively. Also, "present" is set in the "presence/absence of converting process during receiving session" area.

10

15

[0101]

The attached file part 93 is linked as the third document management table 25 to the document management table 24. "Encoded text" is set in the "document type" area.

20

[0102]

In step S52 of Fig. 23, a document management table to be processed is set as the first document management table 23 (information in the header part 91 is set). In step S53, the first document converting

25

process management table in the document management table 23 is set as an object to be processed. In step S54, an original document converting process is executed.

5 [0103]

In step S61 of Fig. 24, the "document converting process status" area in the document management table 23 is checked. Since this status is "IDLE", the flow advances to step S62 without branching in steps S637 to S640, and the "document type" area is checked. Since "text" is set in the "document type" area of the document management table 23, the flow branches from step S641 to step S65 in Fig. 25. In step S65, "conversion information setting completed" is set in the "document converting process status" area of the document management table 23 because parameters necessary for conversion are already set. In step S66, the document converting process management table 29 as the last document to be converted is linked to the "document converting process management table pointer" of the table 23 in order to set document information after conversion. In step S67, parameters such as "internal", "CG rasterization + TIFF file conversion", and "leave file" are set in the "internal/external processing designation" area, the "document converting

process content" area, and the "processing after document conversion" area, respectively, of the original document area 22.

[0104]

5 In step S68, the document converting process management table 29 is set as a table to be processed, the page management table 210 is acquired, and parameters are set. In step S69, "TIFF binary" is set in the "document type" area of the original document
10 area 22. In step S610, parameters to be set in a TIFF file to be formed are set in the "document profile" area of the original document area 22. In step S611, a file (contents are the same as shown in Fig. 12) indicated in the "document path•file name" area as a
15 document profile of the original document area 22, which is an original document of a conversion source, is opened in the "rasterization image file•path•file name" area of the page management table 210. File seek is performed within the range set in the "valid
20 data start•end offset" area of the original document area 22. For example, a character string "investigation report" following "Subject:" on the third line of the header 91 is used to set a file name "investigation report.tiff" after conversion. In step
25 S612, "conversion completed" is set in the "document

converting process status" area of the document management table 23, and the flow returns to step S63 of Fig. 24.

[0105]

5 In step S63 (S647), the "presence/absence of conversion during receiving session" area in the original document area 22 is checked. Since "present" is set in this area, a converting process (to be described in detail later) in step S64 is executed to
10 convert from ASCII text into a TIFF image file. The file name after the conversion is "path•file name" ("investigation report.tiff") set in step S610. If it is determined in step S684 that the converting process terminates normally, the original document converting
15 process (Fig. 23, S54) is completed.

[0106]

 In steps S55 and S511, a document conversion management table to be processed next is searched for. Since no such table exists, the flow advances to step
20 S56. Since no error report document exists either, the flow advances to step S57 to select the document management table 24, which is a document management table for processing the text part 92, as a document management table to be processed next. The processing
25 from step S510 is performed in the same manner as for

the header part 91. The document converting process of the text part 92 is the same as the document converting process of the header part 91 except that CG rasterization of Chinese characters is performed,
5 so a detailed description thereof will be omitted.

[0107]

When the document converting process of the text part 92 terminates normally, the flow advances to step S57 to select the document management table 25 for
10 processing the attached file part 93 as a document management table to be processed next. In step S53, the first document converting process management table in the document management table 25 is set as an object to be processed. In step S54, the original
15 document converting process is performed.

[0108]

In step S61, the "document converting process status" area in the document management table 25 is checked. Since "IDLE" is set as in the document
20 management table 23, the flow advances to step S62 without branching in steps S637 to S640. Since "encoded text" is set in the "document type" area, the flow branches from step S642 to step S613 in Fig. 26. In step S613, "conversion information setting
25 completed" is set in the "document converting process

status" area of the document management table 25. In step S614, "Content Type:" is retrieved from profile information (from the second line to the fourth line) of the attached file part 93. Since the subsequent
5 character string is "text/plain;", the flow branches from step S649 to step S651 in Fig. 27. Since NO is determined in step S651, the flow further branches to step S629 in Fig. 28.

[0109]

10 In step S629, a new document converting process management table is acquired (not shown). In step S630, this table is linked to the "document converting process management table pointer" area of the document management table 25. Next, parameters such as
15 "external", "external server converting process", and "erase of file" are set in the "internal/external processing designation" area, the "document converting process content" area, and the "processing after document conversion" area, respectively, of the
20 acquired document converting process management table (S631). The acquired document converting process management table is initialized (S632), and the document profile information from the second line to the fourth line in the attached file part 93 is set in
25 the "document profile" area (S633). In step S634,

"computer processable binary" is set in the "document type" area. In step S635, "report.doc" as a file name is extracted from the "document profile". In step S630, the extracted file name is set in the "document path•file name" area of the document converting process management table. In step S636, "wait until conversion completion in preceding stage" is set in the "document converting process status" area of this table, and the flow advances to step S63 in Fig. 24.

10 When "wait until conversion completion in preceding stage" is set in the "document converting process status" area, the flow does not proceed to the next processing pertaining to the attached file processing until the converting process in the external server

15 (rasterization server) is complete (for example, processing such as printing is not performed until reception of converted data from the external file server is complete).

[0110]

20 Details of the converting process in step S64 will be described below with reference to Fig. 31. In the following explanation, it is assumed that a character string in the header part 91 shown in Fig. 12 is subjected to CG rasterization and converted into

25 a TIFF image file.

[0111]

In step S81, "converting process in progress" is set in the "document conversion status" area of the document converting process management table being
5 processed, thereby controlling the flow such that the flow does not advance to the next processing until CG rasterization and TIFF file conversion are complete. Since "CG rasterization + TIFF file formation" is set in the "document converting process content" area of
10 this table, the flow branches from step S830 to step S816 in Fig. 32 to convert a character string in the header part 91 into a bit map image. The image is MMR compressed (two dimensionally encoded) in step S817 and converted into a TIFF file in step S818, and the
15 flow advances to step S835 in Fig. 31. If the "process result" area of the table indicates error in step S835, the "presence/absence of error report formation" area in the document converting process management table is checked in step S810. If "form"
20 (an error report) is set in this area, in step S811 "processing after error in progress" is set in the "document converting process status" area of the original document area 22, and the converting process is completed. If "do not form" (an error report) is
25 set, "process completed" is set in the "document

converting process status" area, and the converting process is completed.

[0112]

If in step S811 "processing after error in
5 progress" is set in the "document converting process status" area, the flow returns from step S648 to step S61 in the original document/error report converting process shown in Figs. 24 to 30. The flow further branches from step S639 to step S71 in Fig. 29,
10 thereby advancing to the error report formation process.

[0113]

On the other hand, in a converting process of the attached file part 93 in Fig. 12, the flow branches
15 from step S833 to step S819 in Fig. 33. In step S819, an external server (rasterization server) connected by, e.g., a LAN (Local Area Network) or a telephone line is requested to rasterize an encoded text as "contents of report.doc converted by uuencode" described in the
20 attached file part 93.

[0114]

In step S820, a predetermined unit such as one page of data converted from an encoded text into a TIFF file is received from the rasterization server
25 apparatus. If the data is received with no error, in

step S821 TIFF file data of the received file is written in a file indicated by "raster image file•path•file name" shown in the page management table. Also, whether the received data is correct is checked. Furthermore, document profile information is extracted from the TIFF file data and stored in the "document profile" area of the document management table, and the received data is decoded to check the presence/absence of error in the received image. If "mode of receiving in units of pages" is "YES", a page management table is acquired for each page in step S822, and a page management table queue is formed as indicated by 210, 211, and 212. Next, in step S823 "number of pages" in the page management table is incremented. If "mode of receiving in units of pages" is "NO", the flow advances to step S820 without forming any new page management table in step S825.

[0115]

Next, processing when reception from the rasterization server 1416 terminates with error while the attached file part 93 is being processed will be described below with reference to Fig. 33. In the data receiving process (S820), error correction for received data is implemented by, e.g., a TCP/IP protocol. However, if an unrecoverable error such as

communication timeout occurs, "rasterization server error" is set in the "process result" area of the document converting process management table area in the document management table 25 (S824), and the flow returns to step S835 in Fig. 31. Since the "process result" area indicates error, the flow branches from step S835 to step S810 to check the "presence/absence of error report formation " area in the "document converting process management table". If "form" is found, in step S811 "processing after error in progress" is set in the "document converting process status" area. If "do not form" is found, "conversion completed" is set in the same area in step S812. After that, the converting process, i.e., step S64 in Fig. 24 is completed. Processing when "present" is set in the "presence/absence of error report formation" area will be described below.

[0116]

Since "processing after error in progress" is found in the "document converting process status" area in step S648 of Fig. 24, the flow advances to step S61. In step S61, "processing after error in progress" is found in the "document converting process status", so the flow branches to step S639 and advances to step S71 in Fig. 29. To form text data of an error report,

"conversion completed" is set in the "document
converting process status" area. In step S73, to
perform an error report text data generating process,
the "document converting process management table"
5 address in the "original document" area of the
document management table 25 used in the rasterization
server processing in which the error has occurred is
set in the "error document converting process
management table pointer" area of the document
10 management table 25.

In step S74, to reuse the "document converting
process management table", which is used to store the
data rasterized by the rasterization server, to form
the error report text data, the "document converting
15 process management table pointer" address linked to
the "document converting process management table" in
the "original document" area of the document
management table 25 is set as a currently processed
pointer that is to be processed next.

20 [0117]

In step S75, "error report formation source data"
is set in the "document type" area pointed by the
currently processed pointer. In step S76, "IDLE" is
set in the "document converting process status" area
25 pointed by the currently processed pointer. In step

S72, "error report formation" is set in the "document converting process content" area. In this manner, the error report text data formation process is continued.
[0118]

5 The flow again advances to step S61 in Fig. 24. Since "document converting process status" area pointed by the currently processed pointer contains "IDLE", the flow does not branch to steps S637 to S640; the flow advances to step S62 to check the
10 "document type" area in the document converting process table 28 of the "error report document" area. Since "error report formation source data" is set in this area in step S75, the flow advances to step S77 (Fig. 30). In step S77, "conversion information
15 setting completed" is set in the "document converting process status" area of the "document converting process table" pointed by the currently processed pointer (in which the "document converting process table" address pointed in the "document converting
20 process table pointer" area of the document management table 25). In step S78, the start address of the "error report document" area in the document management table 25 is set in the "next pointer" area of the "document converting process management table"
25 pointed by the currently processed pointer.

[0119]

In step S79, the start address of the "error report document" is set in the currently processed pointer. In step S710, "text" is set in the "document type" area of the "document converting process management table" for the error report document, pointed by the currently processed pointer, thereby indicating that error report text conversion is necessary. In step S711, "wait until conversion completion in preceding stage" is set in the "document converting process status" area of the "document converting process management table" pointed by the currently processed pointer. In this way, the original document converting process, i.e., step S54 in Fig. 23 is completed.

[0120]

Next, in step S55 (Fig. 23) the current document converting process table pointer is updated to the next one. Since no document converting process management table linked to the document management table 25 corresponding to the attached file part 93 exists, the flow does not branch in step S511; the flow advances to step S56 to make the current document converting process table have the contents of the "error document converting process management table

pointer" in the document management table 25. If data is already set in this pointer, this means that an error report document exists, so the flow advances to an error report document converting process (S58).

5 [0121]

In this error report document converting process starting from Fig. 24, in step S61 the "document converting process status" area in the current document conversion management table is checked.

10 Since "conversion completed" is already set in step S71 (Fig. 29) as described previously, the flow branches to step S638 to terminate the error report document converting process and returns to step S59 (Fig. 23). In step S59, "document conversion

15 management table" linked next to the current document converting process table is set in the current document converting process table, and the flow again advances to the error report document converting process in step S58. In the error report document

20 converting process, in step S61 (Fig. 24) the "document converting process status" area in the current document conversion management table is checked. Since "conversion information setting completed" is already set in step S77 (Fig. 30) as

25 described previously, the flow branches from step S640

to step S63. Since no receiving session is currently being executed, the flow advances to step S64 to execute the converting process (Fig. 31).

[0122]

5 In this converting process, in step S81
"conversion in progress" is set in the "document
converting process status" is set in the current
document converting process table. In step S82,
"document converting process content" area is checked.
10 Since "error report formation" is already set in this
area in step S72 (Fig. 29) as described above, the
flow branches from step S834 to step S85. "Japanese S
JIS" is set in the "document type" area of the current
document management table in the content type
15 analyzing process (Fig. 21, S47). Also, it is
determined that the "process result" in the "document
converting process table" indicated by the "error
document converting process management table pointer"
area in the current document management table is
20 "rasterization server error" (already set in step S824
(Fig. 33)). Accordingly, text data of an error report
such as shown in Fig. 37 is generated by Shift JIS
character codes and written as a text file of
"document path•file name" in the current document
25 converting process table (S85).

[0123]

Since the text generating process is normal, the flow does not branch in step S835 to check the "document converging process status" area in the "document converting process table" linked to the "next pointer" area in the current document converting process table (S83). If the content is "wait until conversion completion in preceding stage", YES is determined in step S836. After that, "IDLE" is set in this area (S84), and the converting process is completed.

[0124]

Since the converting process (S64) shown in Fig. 24 is completed and the "document converting process status" area is not "processing after error in progress", the error report converting process is completed, and the flow advances to step S59 in Fig. 23. In step S59, the current document converting process table is set to the "document converting process table" linked to the "next pointer" area in the current document converting process table. Since the next table exists, YES is determined in step S512, and the error report converting process is again executed in step S58. The contents of the current document converting process table are the same as the

contents set in step S710 (Fig. 30); "text" is set in the "document type" area. Processing from this point is identical with the aforementioned processing for the header part 91, so a detailed description thereof will be omitted.

[0125]

The foregoing is the processing when error occurs in communication with the rasterization server. If error is detected when the rasterization server is rasterizing source data, the rasterization server generates an error report described above and transmits as an image file to the communication apparatus of this embodiment. Alternatively, the rasterization server informs the communication apparatus of error information, and the communication apparatus generates an error report.

[0126]

Fig. 34 is a protocol sequence view showing a rasterization request used in step S819 of Fig. 33 to request an image rasterization server 1418, connected via the LAN 2011 (or the WAN 2051), to rasterize data that cannot be rasterized in the communication apparatus 148 of the present invention. In this embodiment, TCP/IP is used as the protocol.

[0127]

First, the communication apparatus of the present invention associates, by using TCP/IP, with the rasterization server apparatus by a port number (xx) corresponding to a demon process of rasterization (S121). Next, the rasterization server apparatus responds (S122) to start a document rasterization request session. The communication apparatus sends a "rasterization request" command to the rasterization server apparatus (S123) to request the server to start the rasterizing process session.

[0128]

The communication apparatus receives a response from the rasterization server apparatus (S124) and, in order to report information "rasterization control data" pertaining to data requested to be rasterized, sends a "rasterization control data transfer request" to the rasterization server apparatus (S125). After receiving a normal response from the server (S126), the communication apparatus transmits the rasterization control data (S127). As this rasterization control data, pieces of information such as "language type", "paper size for image rasterization" (e.g., A4 or B4), "form one file by a plurality of pages of raster images in image

rasterization" or "form one file by one page", and "reception number" are transferred.

[0129]

When completing the transmission of the

5 rasterization control data and receiving a normal response from the server (S128), the communication apparatus transmits a rasterization data transmission request command to the server (S129). After receiving a response from the server (S1210), the communication

10 apparatus transmits electronic mail data (attached file data) as rasterization data on the basis of information recorded in a predetermined area of the management table (Fig. 13) (S1211). This rasterization data transmitted is a "computer

15 processable binary" file converted (decoded) from text to binary data. If a plurality of attached files required to be rasterized exist, the steps from the sending of the rasterization control data transfer request command (S125) are repeated. This makes

20 transmission of data in one session possible. After completing the transmission of the electronic mail data, the communication apparatus receives a normal response from the server (S1212). If no more file to be rasterized (to be transmitted) exists, the

25 communication apparatus sends a "session termination

request" command to the rasterization server apparatus
(S1213). After receiving a normal response from the
server (S1214), the communication apparatus transmits
a port disconnection request (S1215) to terminate the
5 session.

[0130]

Fig. 35 shows a rasterized document transfer
protocol sequence used to send raster image data from
the image rasterization server 1416 to the
10 communication apparatus 148. TCP/IP is used as when
the communication apparatus requests rasterization.
Assume that the image rasterization server has already
received "form one file by one page" rasterization
control data from the communication apparatus.

15 [0131]

The rasterization server apparatus 1416
associates, by using TCP/IP, with the communication
apparatus 148 by a port number (xx) corresponding to a
demon process of rasterized document reception
20 operating on the communication apparatus (S131). Upon
receiving a response from the communication apparatus
(S132), the server transmits a "rasterized file
transfer session start request" command (S133). The
communication apparatus normally responds to this

command (S134) to start a rasterized document transfer session.

[0132]

First, the rasterization server apparatus
5 transmits a "rasterized document transfer request"
command (S135). When receiving this command, the
communication apparatus prepares for reception, e.g.,
acquires a memory and table for reception, and returns
a response (S136). Upon receiving the response, the
10 server transmits "rasterization result data" such as
"reception number" and "rasterizing process result"
(S137). Of the received rasterization result data,
the communication apparatus sets necessary data in a
predetermined area of the management table (Fig. 13)
15 and returns a response (S138).

[0133]

The rasterization server apparatus transmits a
"rasterized file data transfer request" command for
the first page (S139). The communication apparatus
20 sets information concerning a file to be transmitted,
obtained from this command, into a predetermined area
of the management table and returns a response (S1310).
Upon receiving this response, the server transmits
file data (first page) rasterized into TIFF binary
25 (S1311). In this embodiment, "form one file by one

page" is set when rasterization is requested.

Therefore, the communication apparatus stores the received file in the HDD 2004 or the like. The communication apparatus also stores management

5 information in the page management table 210 linked to the page management table pointer area in the "last document to be converted" area 29 of the document management table 23, and returns a response (S1312).
[0134]

10 Subsequently, the server and the communication apparatus execute steps S139 to S1312 for a file of the second page. The communication apparatus stores management information of this second page file in the page management table 211. The same processing is
15 repeatedly performed for the remaining pages.

Transfer request (S1313) and file data transmission (S1315) are similarly performed for the last (Nth) page. The communication apparatus normally responds after reception (S1316), and the rasterization server
20 apparatus transmits a "data transfer completion information" command (S1317). The rasterization server apparatus receives a normal response from the communication apparatus (S1318) and confirms that transmission of all pages terminates normally. If no
25 more rasterized document exists, the server transmits

a "session termination request" command (S1319). To transmit a plurality of documents, the steps from the transmission of the "rasterized document transfer" command (S135) to S1318 are repeated. When the
5 communication apparatus receives the "session termination request" command and returns a normal response (S1320), the rasterization server apparatus transmits a "port disconnection request" command to terminate the session.

10 [0135]

Fig. 36 is a printing process flow chart for performing control, after received electronic data is converted into image data printable by the printing device of the communication apparatus of the present
15 invention, so that the image data does not mix with other printing data in units of pages.

[0136]

First, the electronic data converting transaction management table 21 (Fig. 13) storing received data
20 and used in various converting processes is looked up (S161). A "document management table" linked to the "document management table pointer" area of this table is set as a current document management table (S162). In step S1614, whether all document management tables
25 have been looked up is checked. If YES in step S1614,

the processing is terminated; if not, in step S163 the
"error report document" area in the "document
management table" is looked up as a current document
converting process table. Whether all document
5 converting process tables in the current document
management table have been looked up is checked
(S1611). If YES in step S1611 and no error report
document is being looked up (S169), the flow advances
to step S168 to set the current document management
10 table to the contents of the "next pointer" area in
the table, and returns to step S1614.

[0137]

On the other hand, if an error report is
currently being looked up, the "last document to be
15 converted" area in the current document management
table is set as the current document converting
process table as a document to be printed (S1610), and
the flow advances to step S1611. Since not all
document converting process tables have been
20 completely looked up, the "document type" area in the
current document converting process table is looked up
to check whether the document is "TIFF binary" or
"JPEG binary" (S1615). If the document is one of
these two types, whether the "document path•file name"
25 area in the current document converting process table

has been set is checked (S1616). If this area has been set, the file is printed (S1617).

[0138]

If the area has not been set, in step S164 the
5 "page management table pointer" in the current
document converting process table is set as the
current page management table, and whether all pages
have been looked up is checked (S1612). If all pages
have been looked up, in step S167 the next current
10 document conversion management table is set to the
next one, and the flow advances to step S1611.

[0139]

If not all pages have been looked up in step
S1612, the "rasterization image file•path•file name"
15 area in the current page management table is checked
(S1613). If this area has not been set, the flow
advances to step S166; if YES, the set file is printed
in step S165. In step S166, the contents of the "next
pointer" in the current page management table are set
20 in the table, and the flow advances to step S1612. In
this manner, the printing process is completed through
processing of all pages in document conversion
management table . processing of all document
management tables . processing of all document
25 management tables.

[0140]

[Other Embodiments]

In the above embodiment, the present invention is applied to a hybrid machine having a copying function and a FAX function. However, the present invention can be applied to a system constituted by a plurality of devices (e.g., a host computer, interface, reader, and printer) or to an apparatus (e.g., a copying machine or facsimile apparatus) comprising a single device.

[0141]

Further, the object of the present invention can also be achieved by providing a storage medium storing program codes of software for performing the aforesaid functions according to the embodiments to a system or an apparatus, reading the program codes with a computer (or a CPU or MPU) of the system or apparatus from the storage medium, and then executing the program.

[0142]

In this case, the program codes read from the storage medium realize the functions according to the embodiments, and the storage medium storing the program codes constitutes the invention.

[0143]

Further, as the storage medium for providing the program codes, it is possible to use, e.g., a floppy disk, hard disk, optical disk, magnetooptical disk, CD ROM, CD R, magnetic tape, nonvolatile memory card, and
5 ROM.

[0144]

Furthermore, besides aforesaid functions according to the above embodiments are realized by executing the program codes which are read by a
10 computer, the present invention includes a case where an OS (Operating System) or the like running on the computer performs a part or the whole of actual processing in accordance with designations by the program codes and realizes functions according to the
15 above embodiments.

[0145]

Furthermore, the present invention also includes a case where, after the program codes read from the storage medium are written in a function extension
20 board which is inserted into the computer or in a memory provided in a function extension unit which is connected to the computer, a CPU or the like contained in the function extension board or unit performs a part or the whole of actual processing in accordance

with designations of the program codes and realizes functions of the above embodiments.

[0146]

When the present invention is applied to the
5 above storage medium, this storage medium stores program codes corresponding to the aforementioned flow charts. For example, a module capable of realizing the flow chart shown in Fig. 16 is stored in the storage medium.

10 [0147]

[Effects of the Invention]

As has been described above, the communication apparatus of the present invention can rasterize an electronic data document such as a word processor
15 document or a spreadsheet document and output the rasterized data as image data. This releases the user of a PC from a series of complicated operation procedures of once converting a document into image data to form a TIFF file and attaching this TIFF file
20 to electronic mail. That is, the user can easily send a desired word processor document or spreadsheet document from the PC by simply attaching the document using electronic mail software.

[0148]

Also, a word processor document or a spreadsheet document is transferred to this communication apparatus without being rasterized into a TIFF file. Therefore, the data capacity is smaller than that of a
5 TIFF file, so the data can be reliably transmitted to the communication apparatus.

[0149]

Furthermore, the language type of source is detected, and an error report described in that
10 language is transmitted if error occurs. This allows the user to correctly recognize the contents of the error.

[Brief Description of the Drawings]

[Fig. 1]

15 A block diagram showing the overall arrangement of a communication apparatus according to the present invention.

[Fig. 2]

A view showing the front external appearance of the
20 communication apparatus according to the present invention.

[Fig. 3]

A view showing the external appearance of an operation unit.

25 [Fig. 4]

- A block diagram of a scanner image processor.
[Fig. 5]
- A block diagram of a printer image processor.
[Fig. 6]
- 5 A block diagram of an image compressor/expander.
[Fig. 7]
- A block diagram of an image rotator.
[Fig. 8]
- A view for explaining an image rotating process.
10 [Fig. 9]
- A view for explaining the image rotating process.
[Fig. 10]
- A block diagram of a device I/F unit.
[Fig. 11]
- 15 A view showing the arrangement of a network system.
[Fig. 12]
- A view showing the contents of electronic mail data.
[Fig. 13]
- A view showing the data structures of electronic data
20 management tables.
[Fig. 14]
- A sequence diagram pertaining to a data converting
process and a document type after the conversion.
[Fig. 15]

A sequence diagram of an electronic mail
communication procedure.

[Fig. 16]

A schematic flow chart of an electronic data
5 receiving process.

[Fig. 17]

A flow chart of an electronic data delimiting process.

[Fig. 18]

A flow chart of the electronic data delimiting
10 process.

[Fig. 19]

A flow chart of the electronic data delimiting
processing.

[Fig. 20]

15 A flow chart of the electronic data delimiting
process.

[Fig. 21]

A flow chart of a content type analyzing process.

[Fig. 22]

20 A state transition diagram.

[Fig. 24]

A flow chart of a divided document converting process.

[Fig. 25]

A flow chart of a divided document converting process.

25 [Fig. 26]

- A flow chart of a divided document converting process.
[Fig. 27]
- A flow chart of a divided document converting process.
[Fig. 28]
- 5 A flow chart of a divided document converting process.
[Fig. 29]
- A flow chart of a divided document converting process.
[Fig. 30]
- A flow chart of a divided document converting process.
10 [Fig. 31]
- A flow chart of a converting process.
[Fig. 32]
- A flow chart of a converting process.
[Fig. 33]
- 15 A flow chart of a converting process.
[Fig. 34]
- A diagram of a document rasterization request
protocol sequence.
[Fig. 35]
- 20 A diagram of a rasterized document transfer protocol
sequence.
[Fig. 36]
- A flow chart of a printing process. and
[Fig. 37]
- 25 A view showing an example of an error report.

[Description of the Reference Numerals]

	2001	CPU
	2002	RAM
5	2003	ROM
	2004	HDD
	2005	image bus I/F
	2006	operation unit I/F
	2007	system bus
10	2008	image bus
	2010	network I/F
	2020	device I/F
	2040	image compressor/expander
	2050	modem
15	2060	raster image processor
	2070	scanner
	2095	printer

ABSTRACT

[Summary]

[Problem] To provide a communication apparatus
analyzing non image data attached to an e-mail and
5 outputting image data.

[Solution] Delimiting, by using header
information, a received e-mail into parts (S152), then
applying a document converting process to each of the
parts based on the header information and then
10 outputting the conversion result as bit map data
(S1511).

[Selected Drawing] Fig. 16

FIG. 1

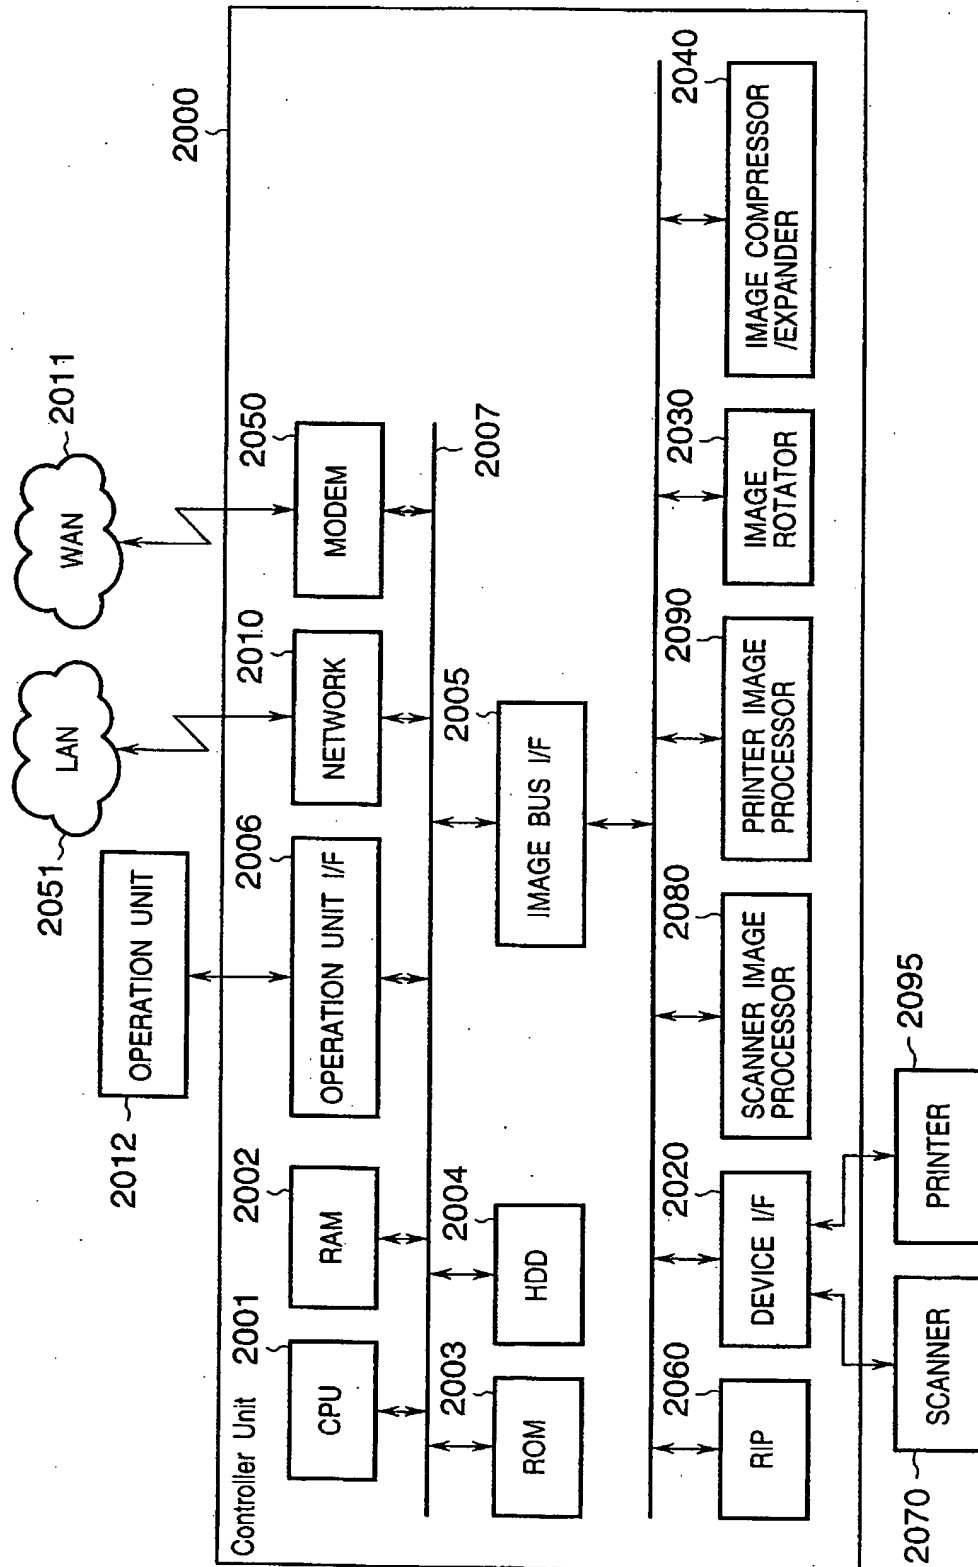


FIG. 2

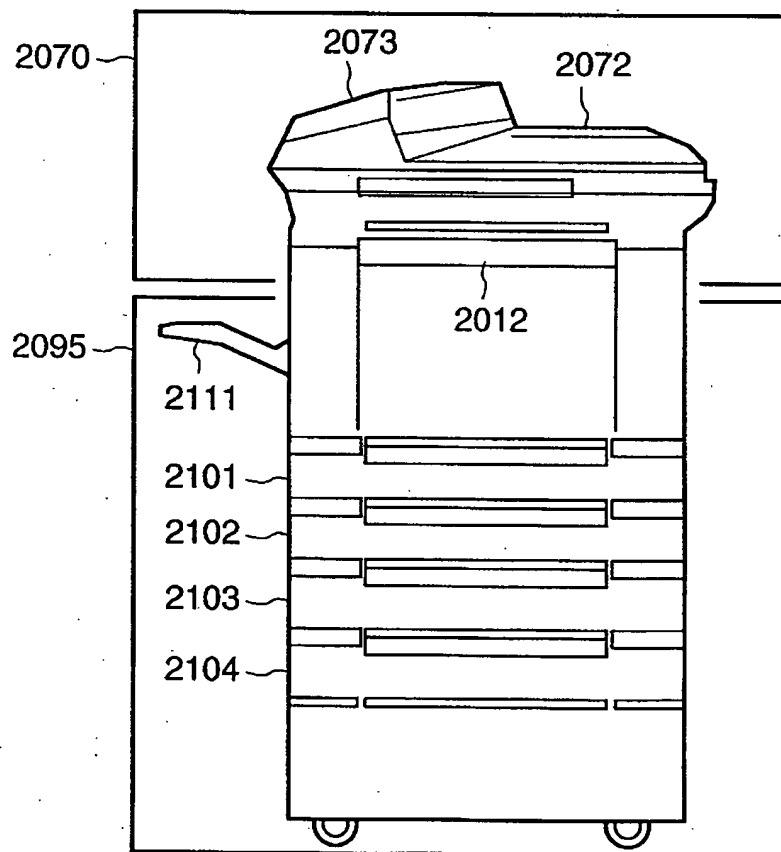


FIG. 3

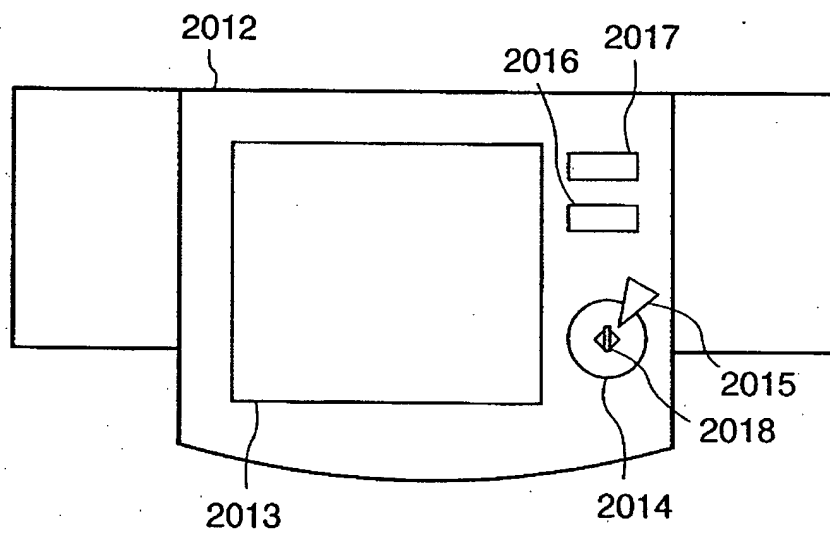


FIG. 4

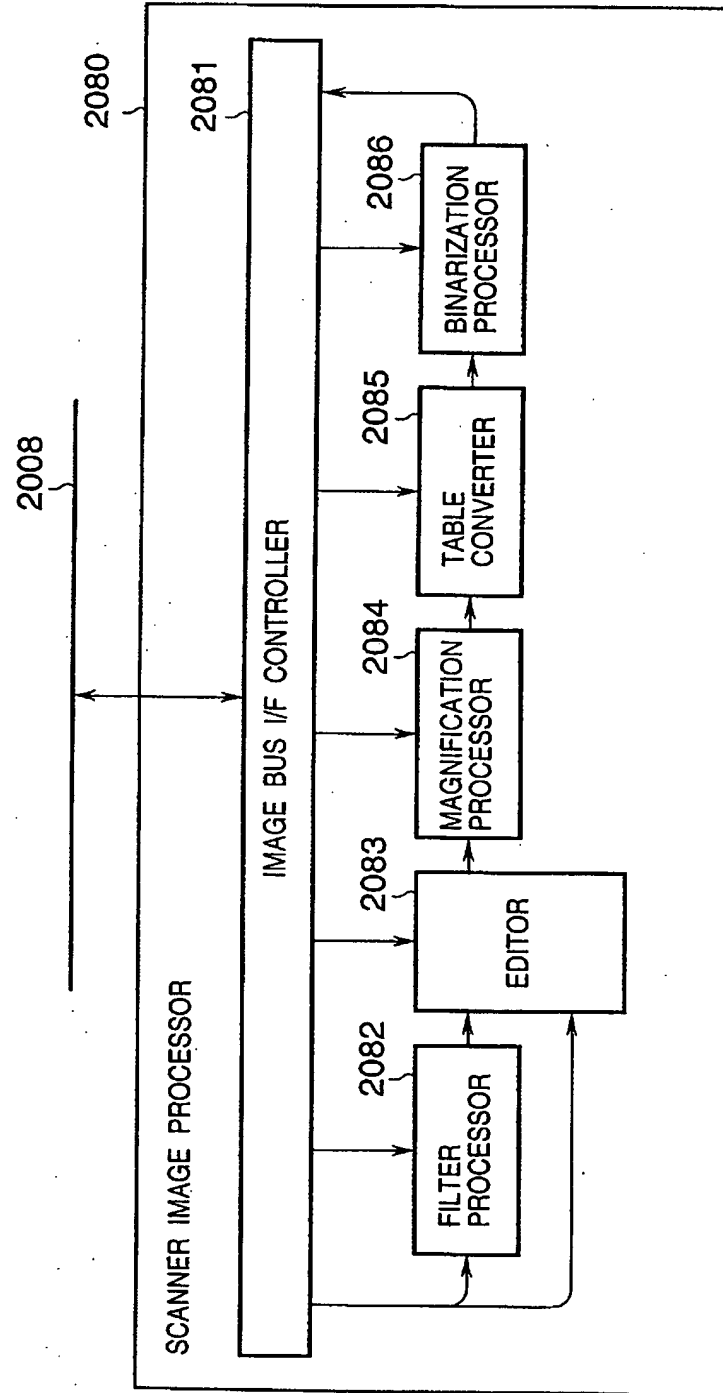


FIG. 5

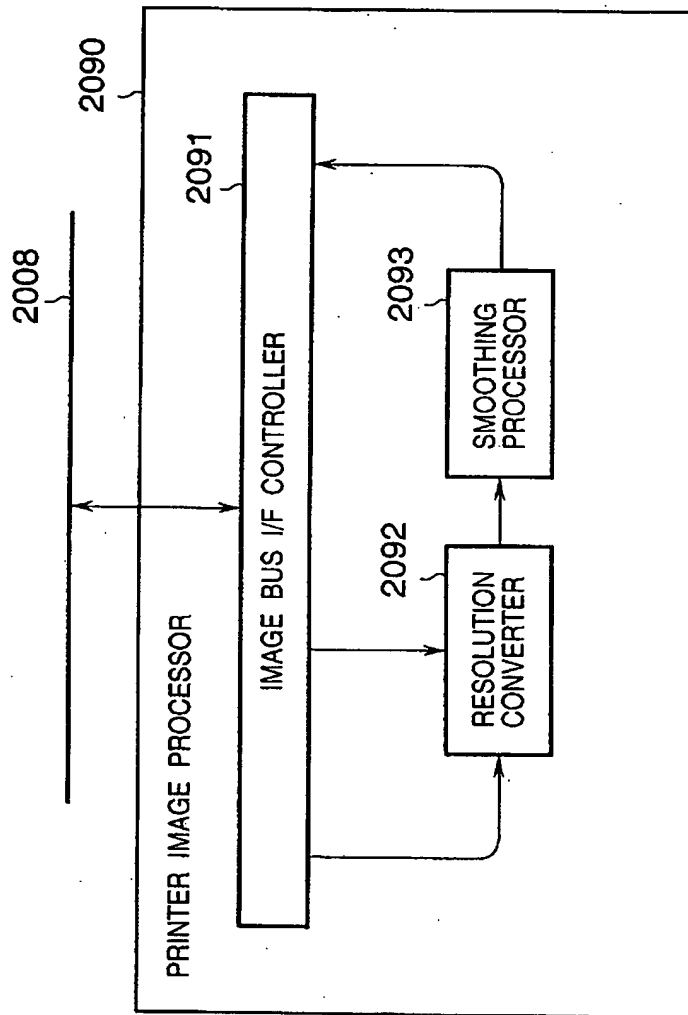


FIG. 6

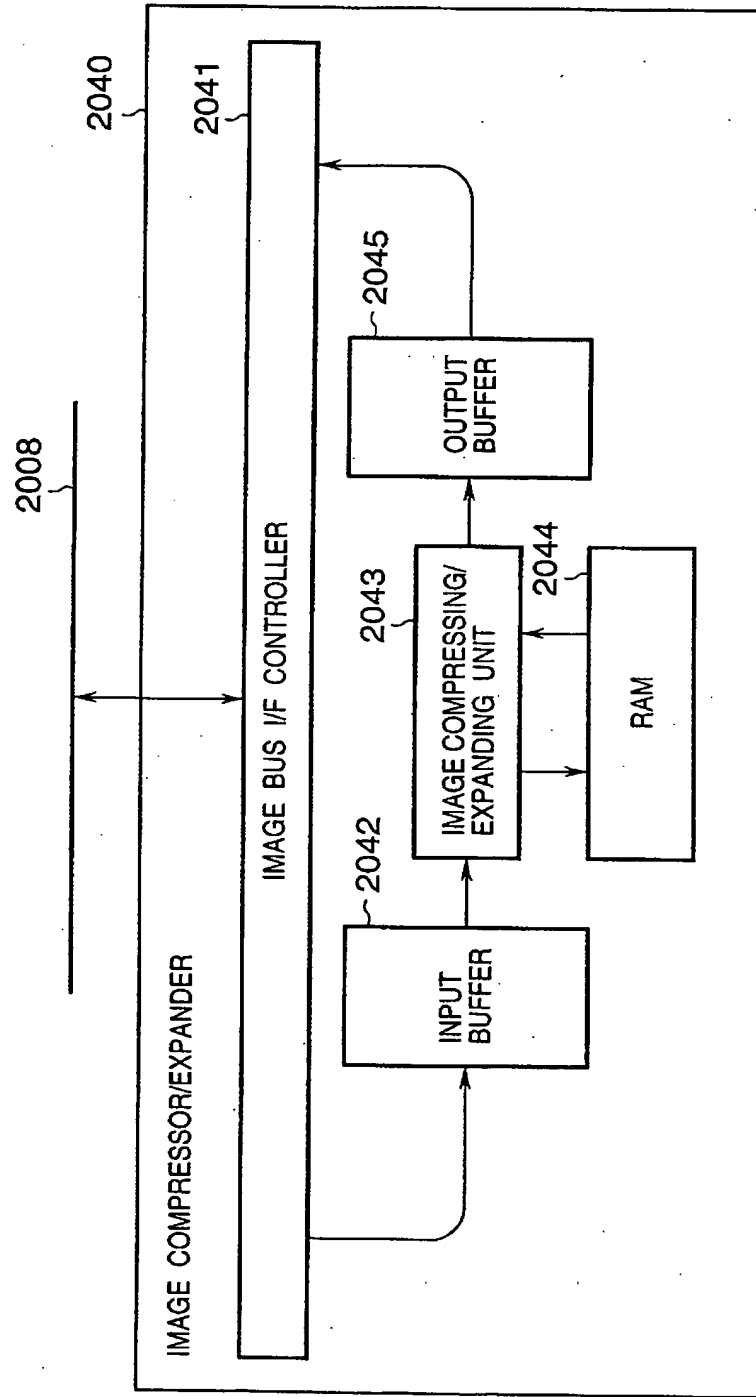


FIG. 7

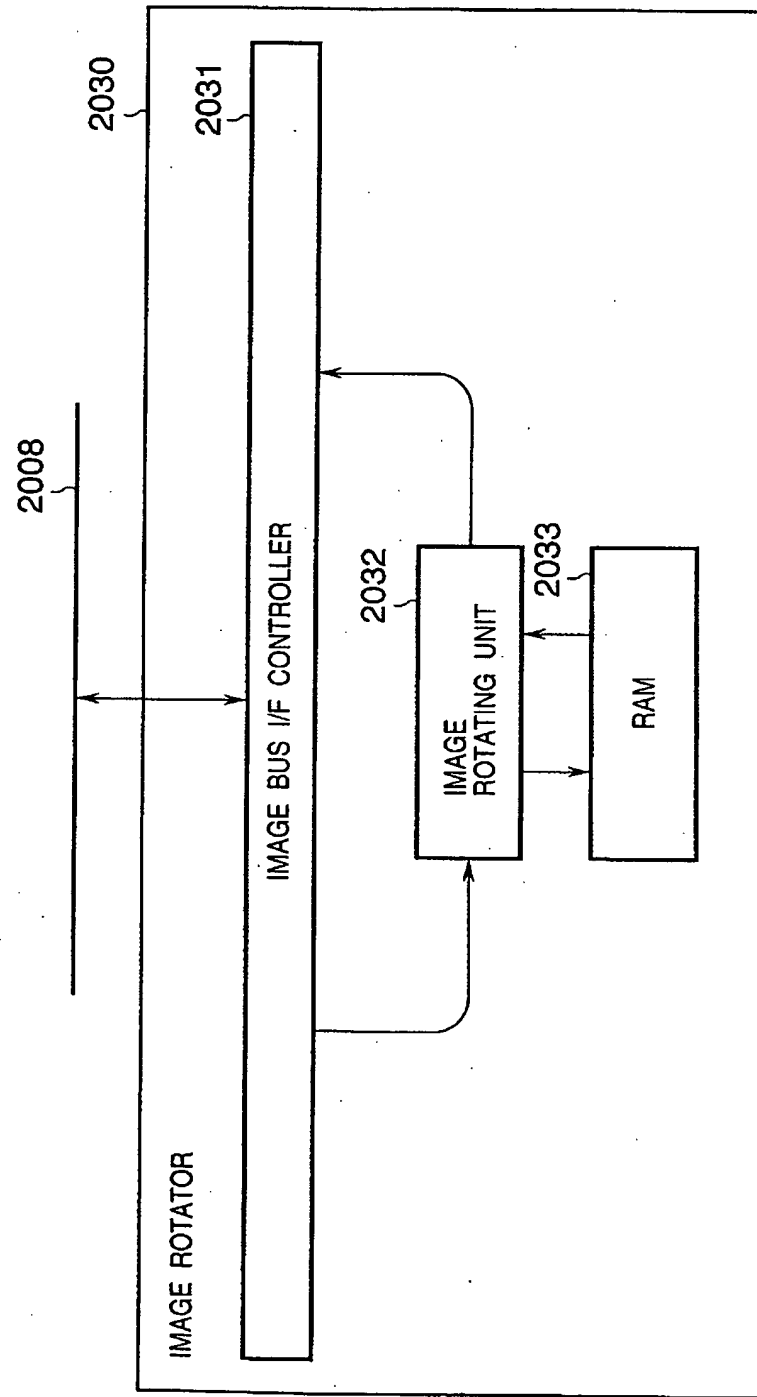


FIG. 8

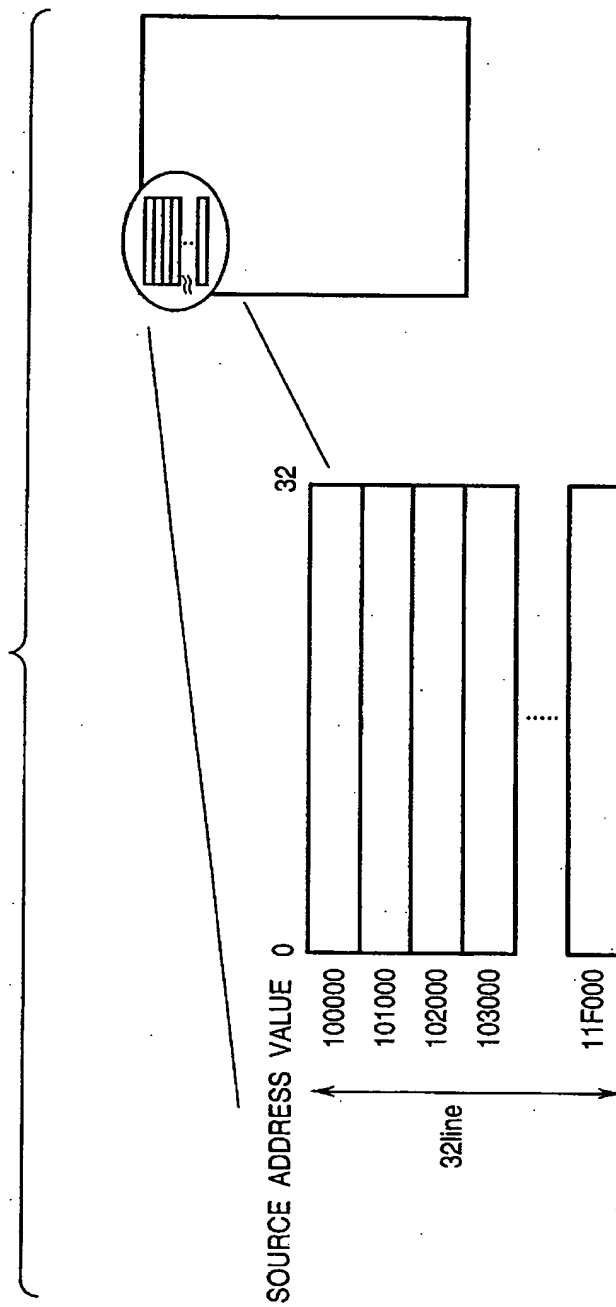


FIG. 9

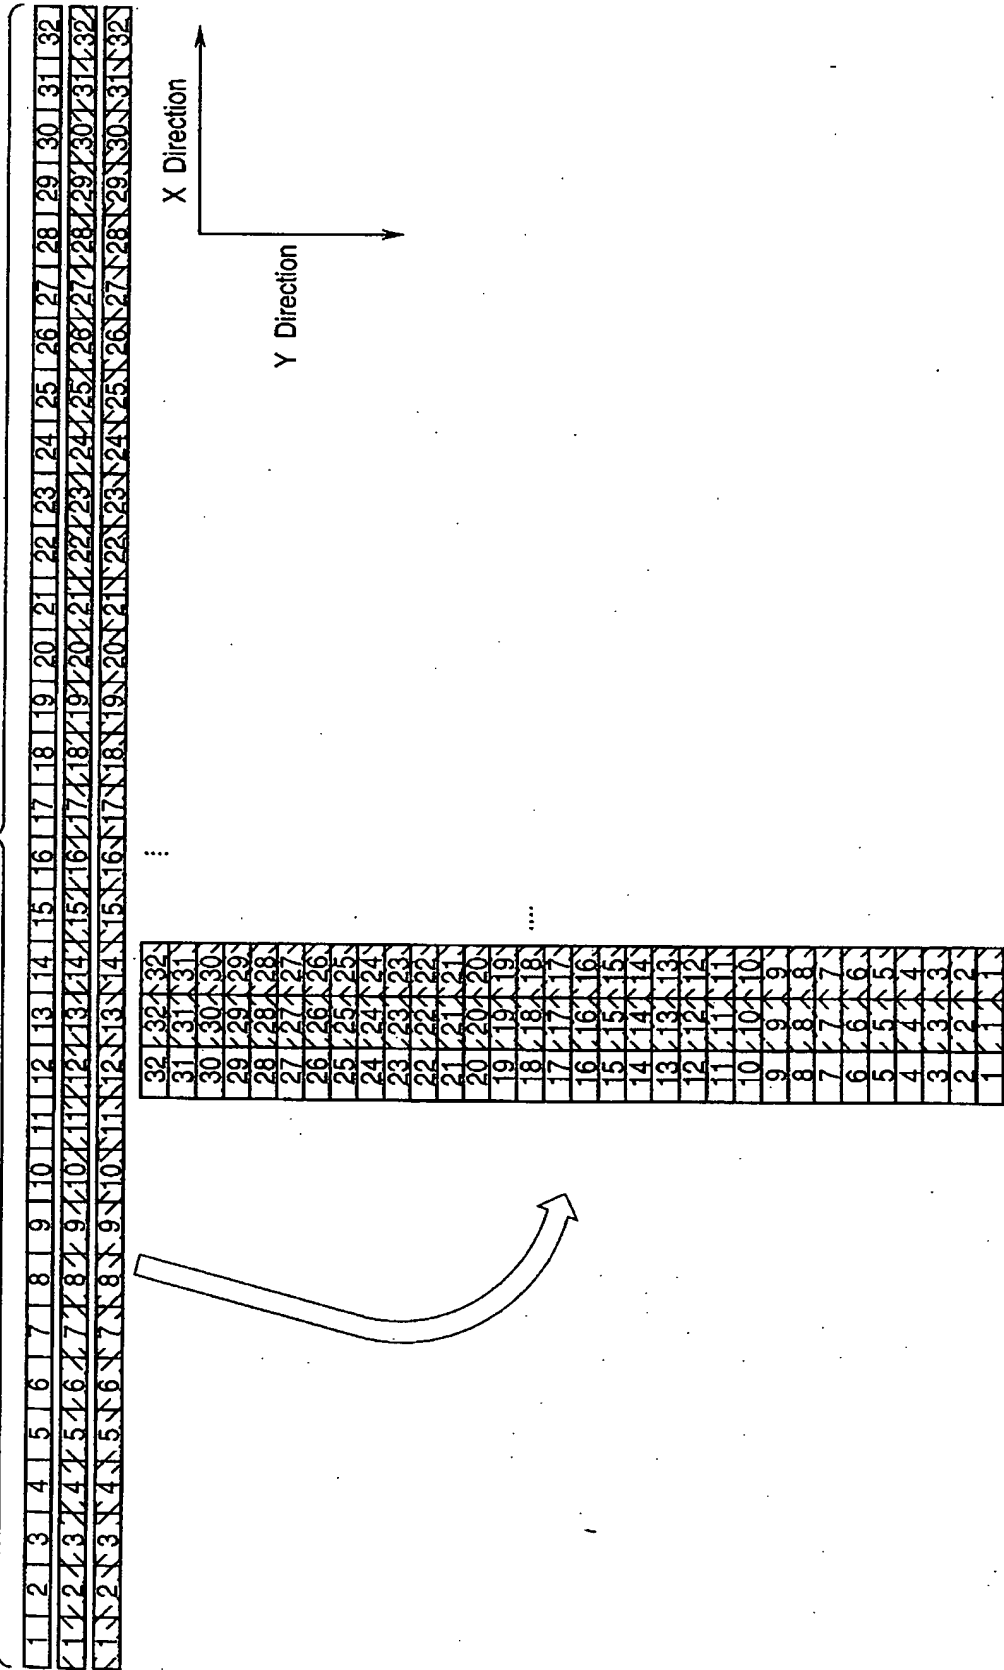


FIG. 10

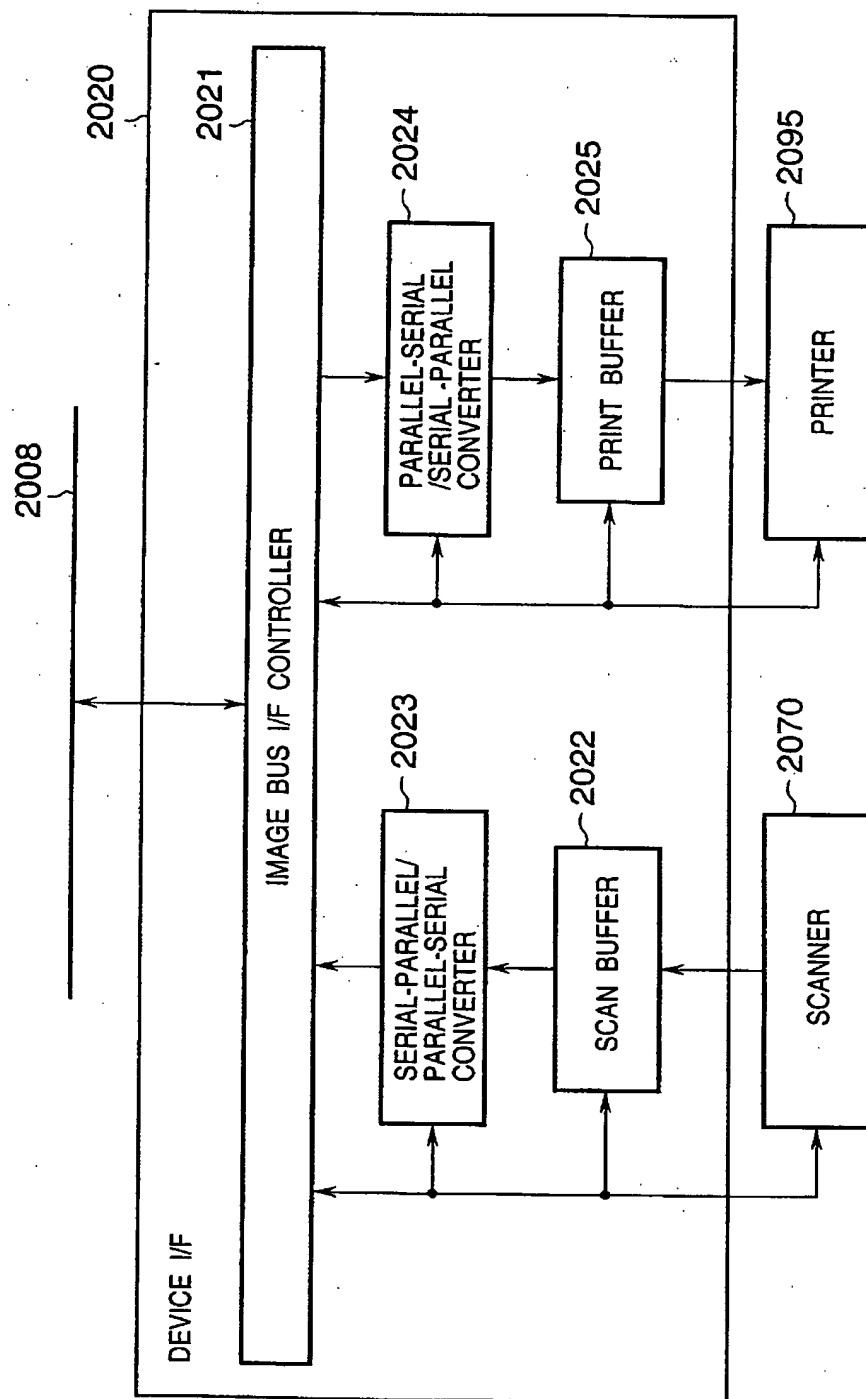


FIG. 11

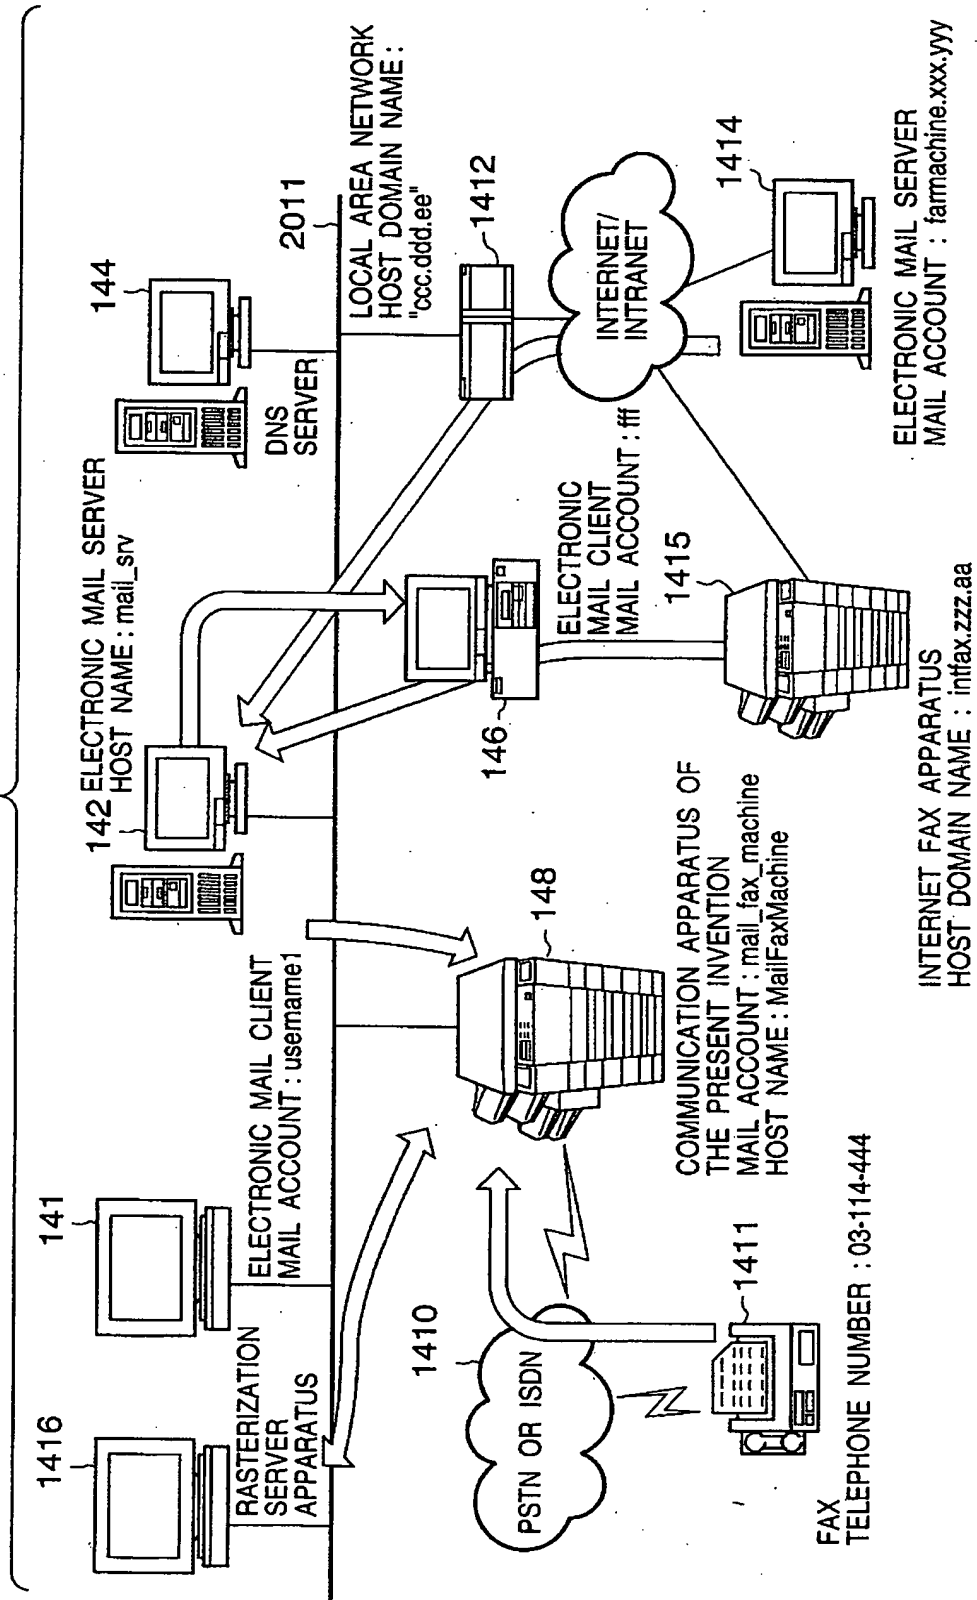


FIG. 12


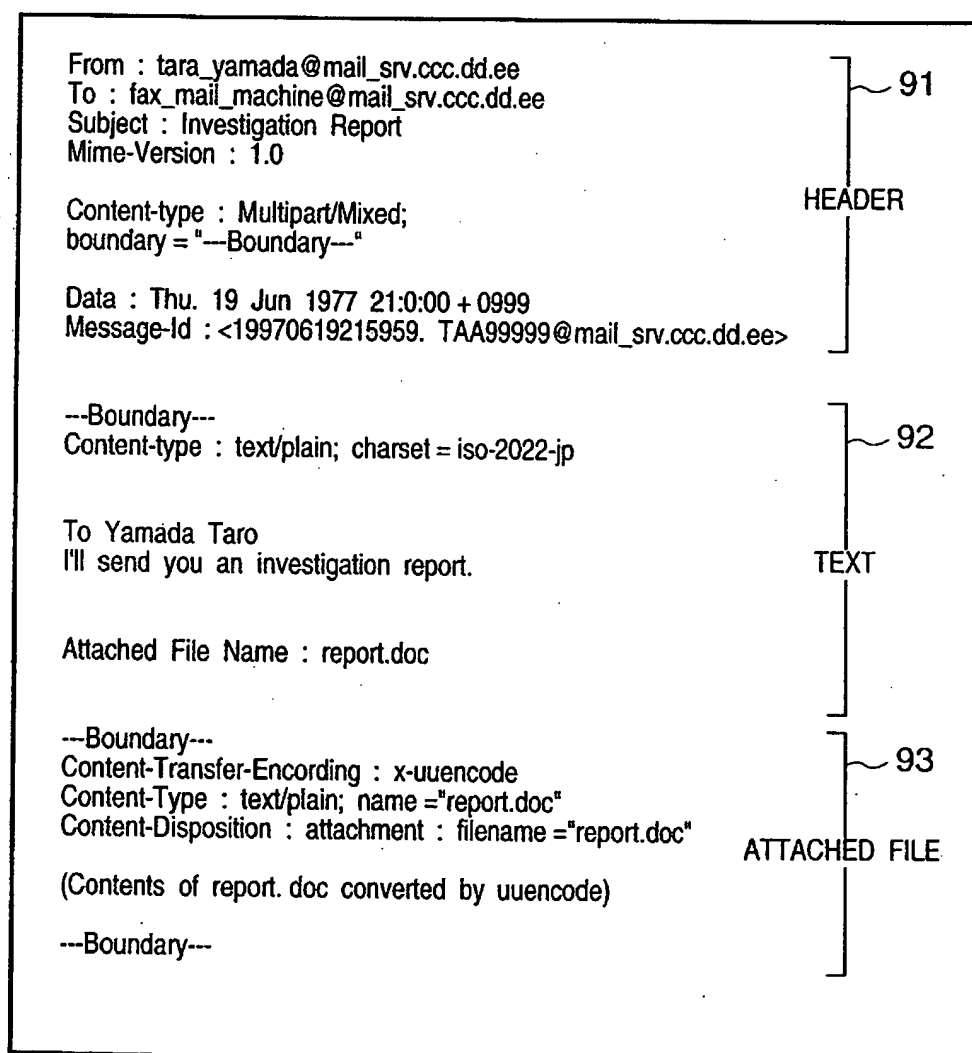


FIG. 13

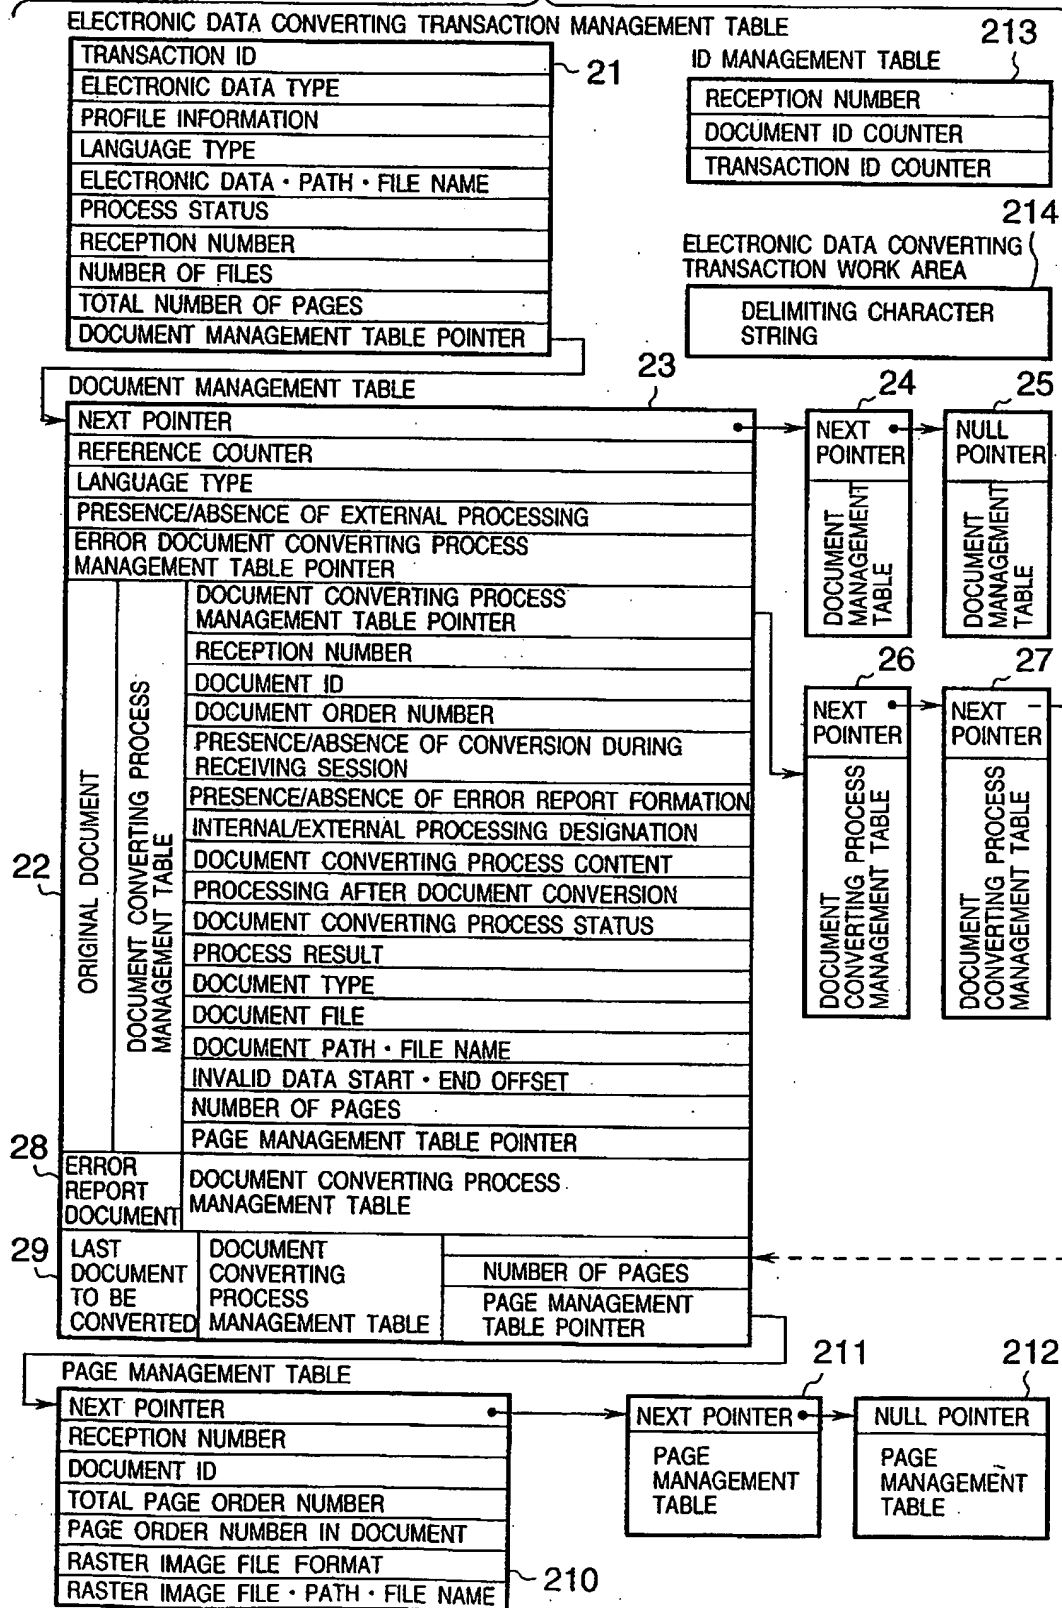

```

graph TD
    START([START]) --> CTE([Content-Transfer-Encoding])
    CTE -- PRESENT --> ET[/ENCODED TEXT/]
    ET --> XU[x-uunicode]
    ET --> B64[base64]
    XU --> T2B_U[TEXT->BINARY CONVERSION  
(unicode)]
    B64 --> T2B_B64[TEXT->BINARY CONVERSION  
(base 64 DECODING)]
    T2B_U --> BINARY1[/BINARY/]
    T2B_B64 --> BINARY1
    CTE -- ABSENT --> CT([Content-Type])
    CT -- PRESENT --> TP[/text/plain/]
    TP --> charset[/charset/]
    TP --> name[/name/]
    charset --> TEXT[/TEXT/]
    name --> CPB[/COMPUTER PROCESSABLE  
BINARY/]
    CPB --> TB1[/TIFF BINARY/]
    CPB --> JB1[/JPEG BINARY/]
    TB1 --> CRTFC[CG RASTERIZATION +  
TIFF FILE FORMATION  
CONVERSION]
    JB1 --> CRTFC
    CRTFC --> TB2[/TIFF BINARY/]
    CT -- ABSENT --> CD([Content-Disposition])
    CD -- PRESENT --> att[/attachment/]
    CD -- PRESENT --> alt[/alternative/]
    att --> itiff[/image/tiff/]
    att --> ijpeg[/image/jpeg/]
    itiff --> TB3[/TIFF BINARY/]
    ijpeg --> JB2[/JPEG BINARY/]
    alt --> filename[/filename/]
    TB3 --> CRTFC
    JB2 --> CRTFC
    CRTFC --> TB2
    TB2 --> BINARY1
    filename --> BINARY1
    TB2 --> BINARY1
    JB2 --> BINARY1
  
```

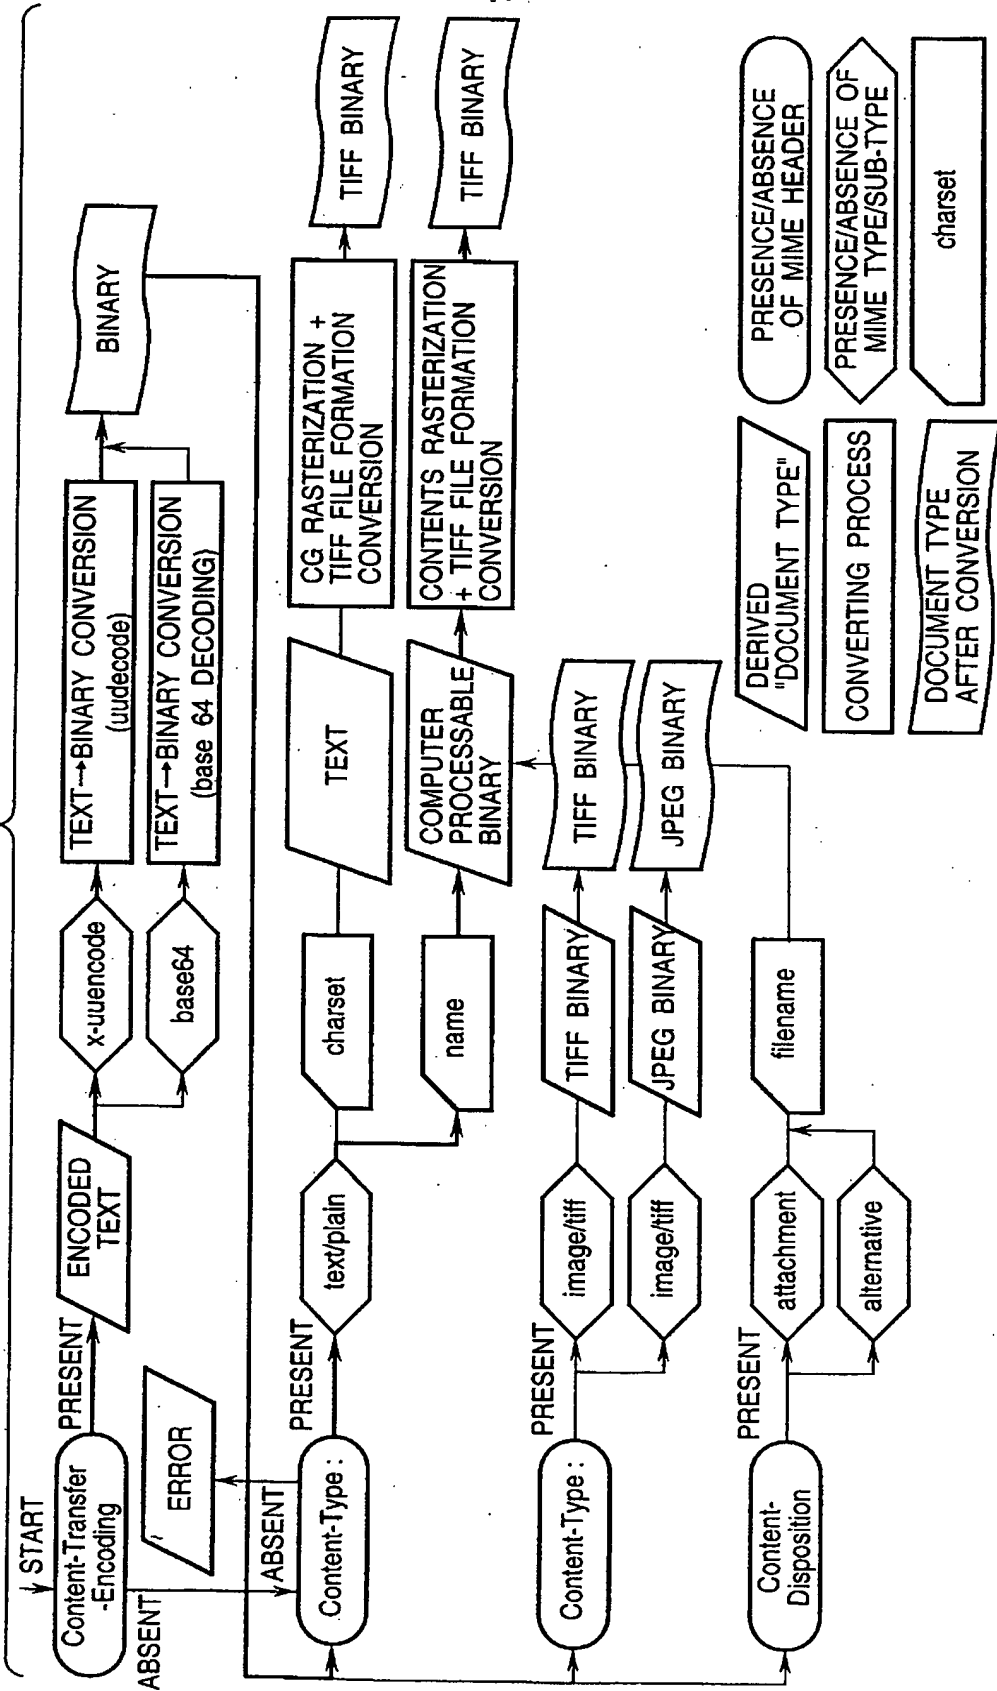


FIG. 15

ELECTRONIC MAIL
APPARATUS ON
TRANSMITTING SIDE

COMMUNICATION
APPARATUS

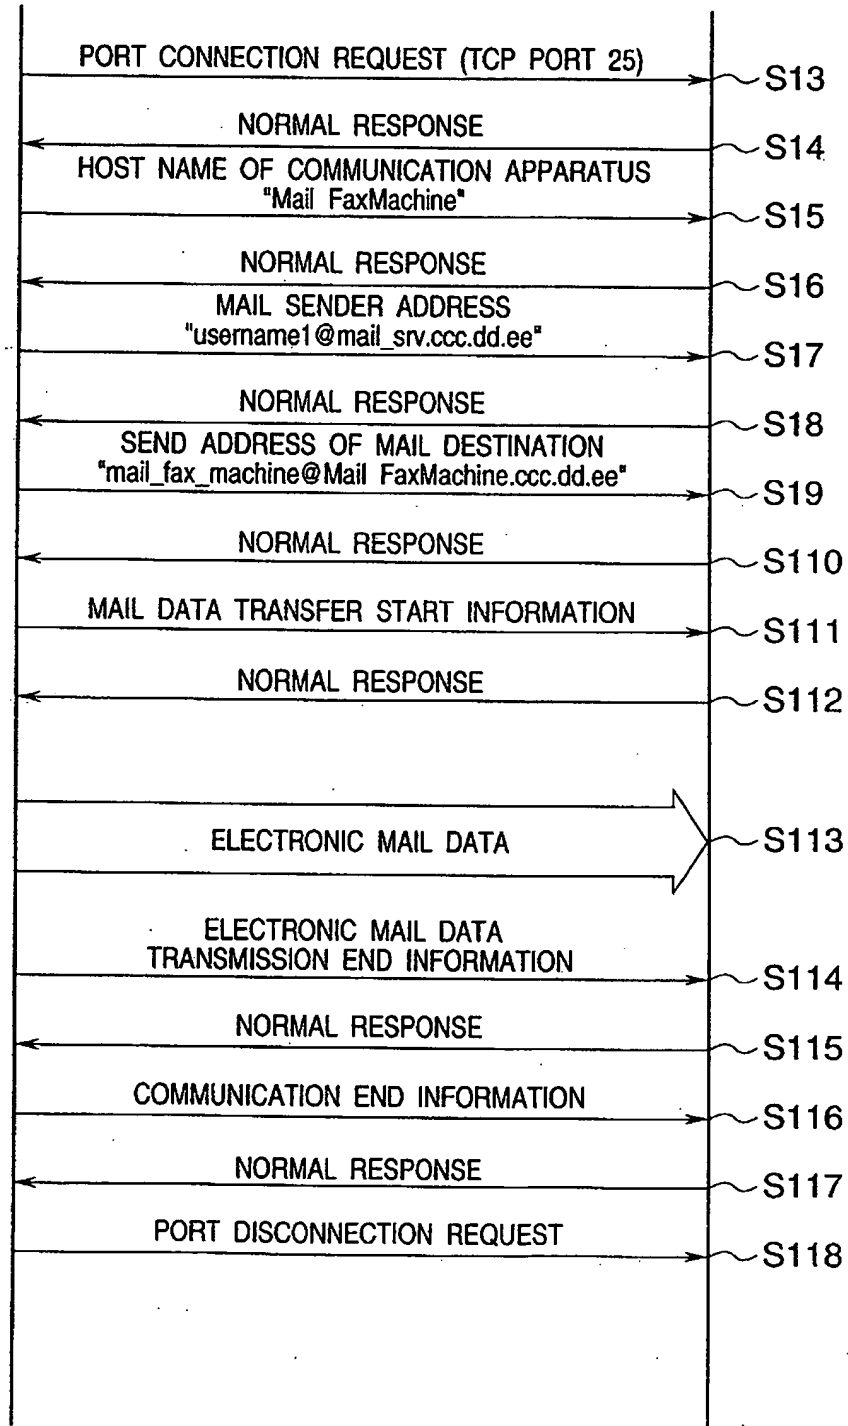


FIG. 16

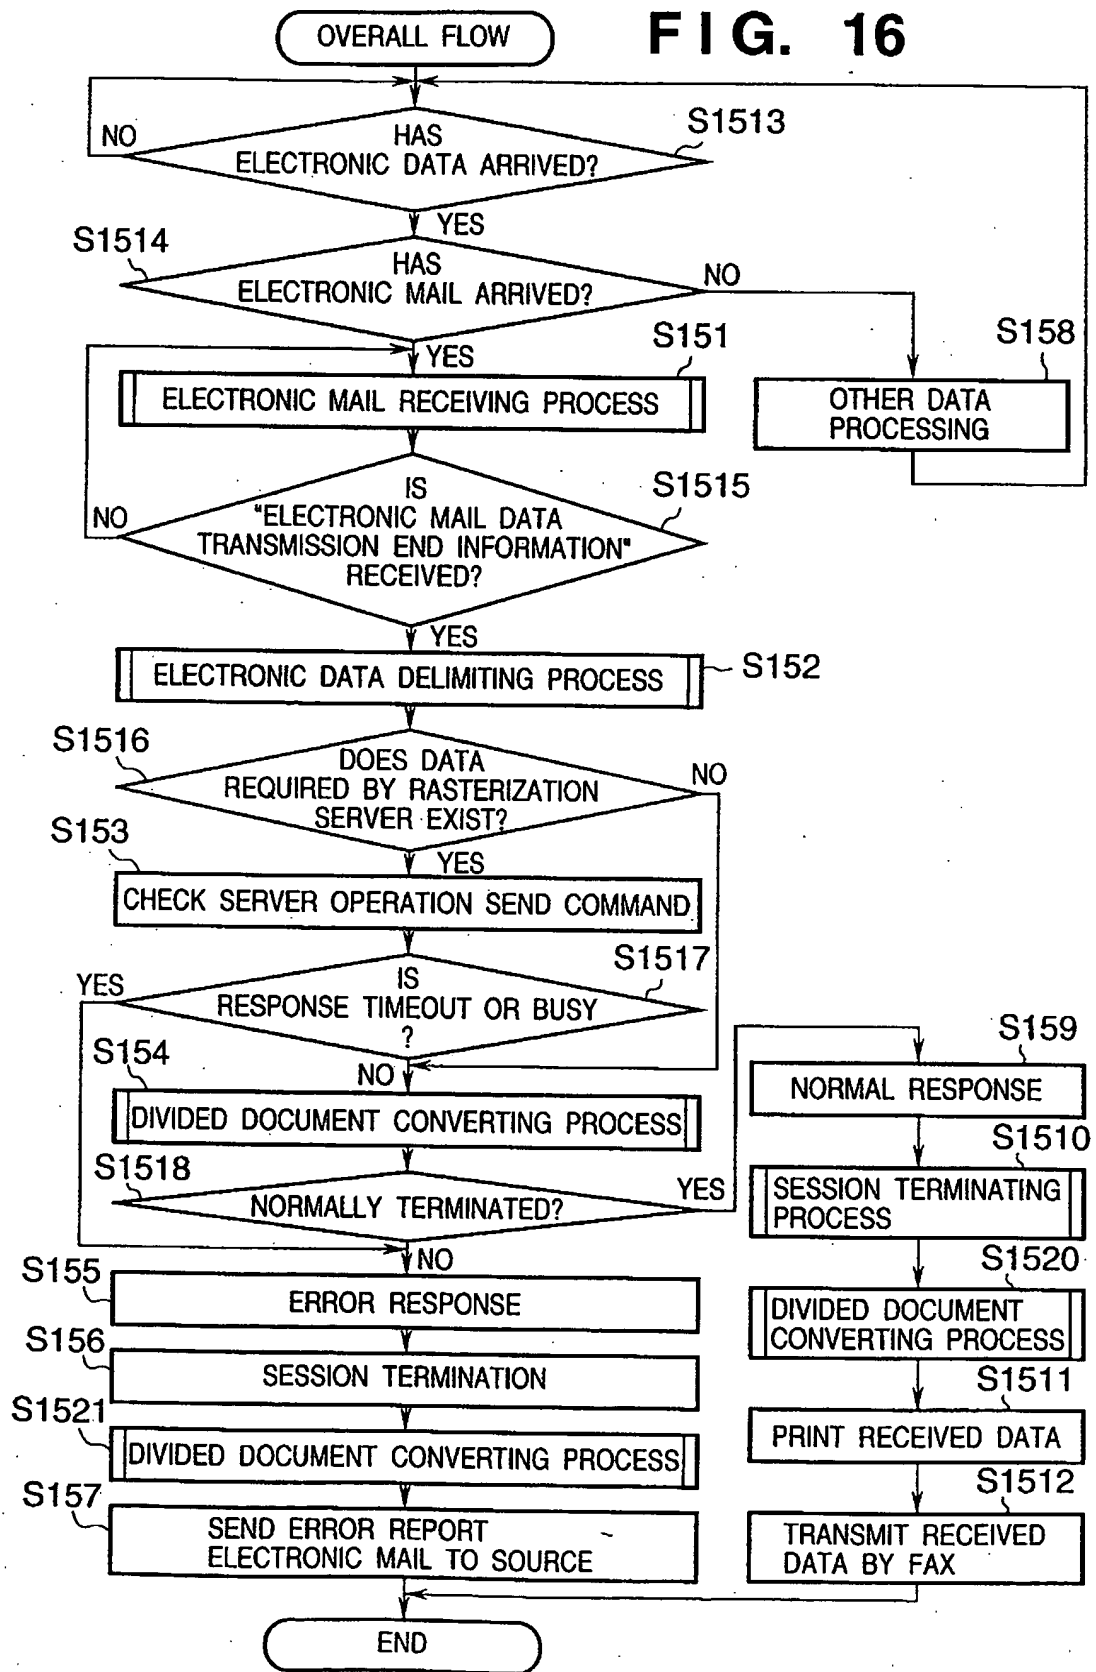


FIG. 17

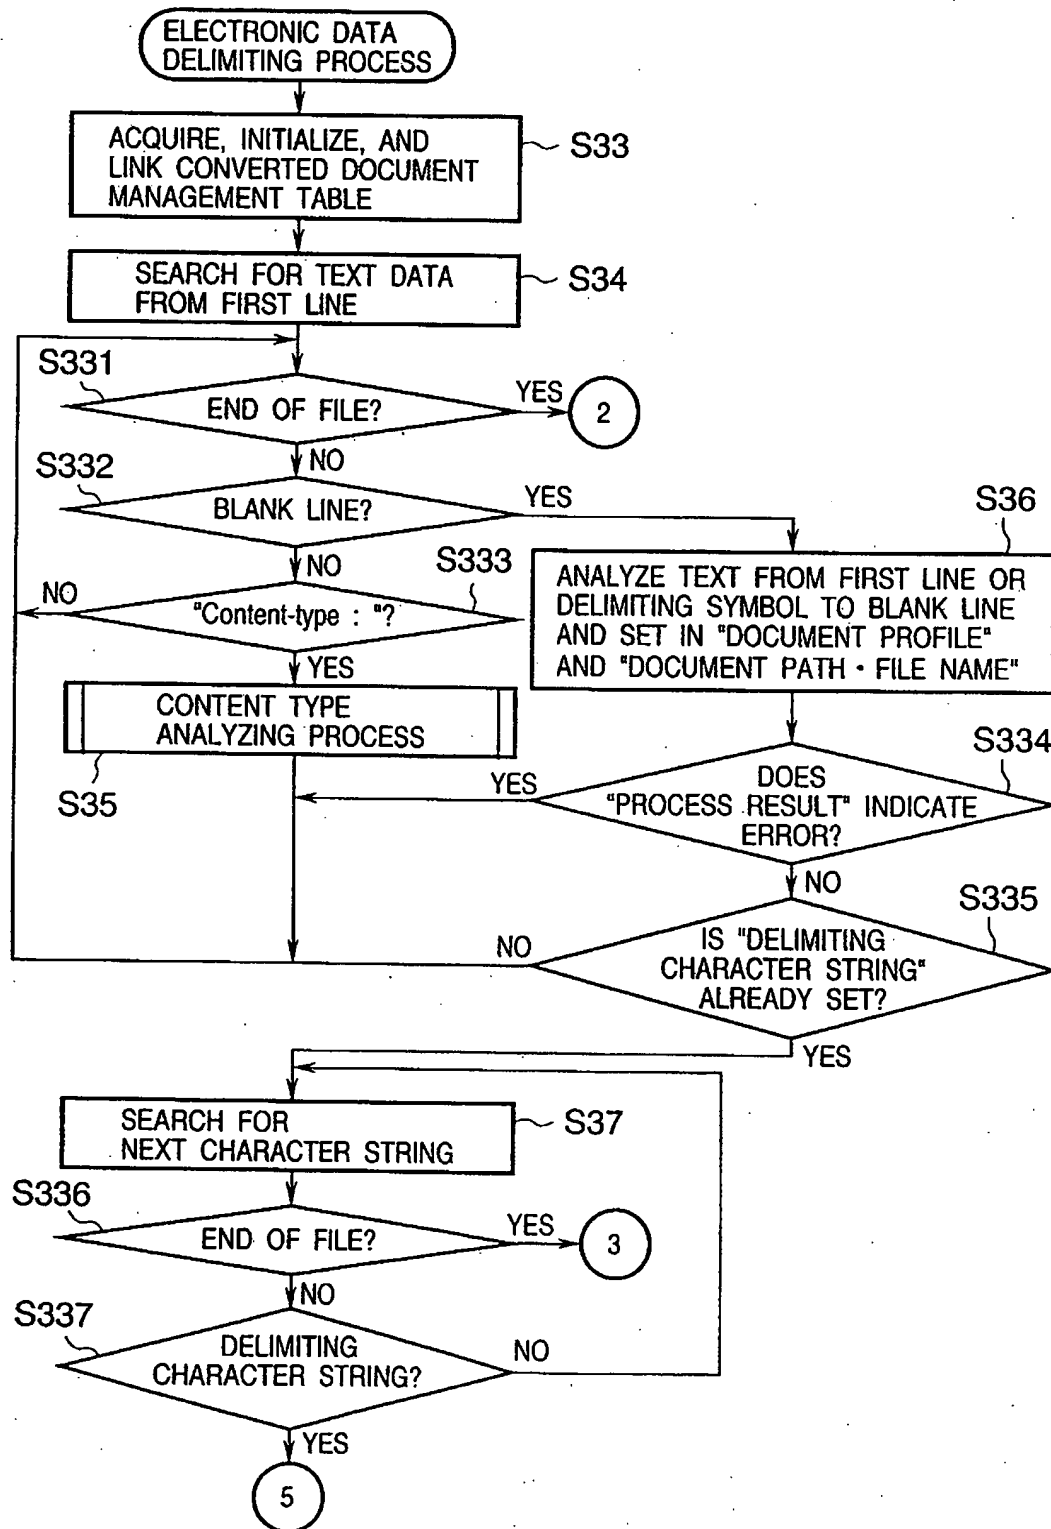


FIG. 18

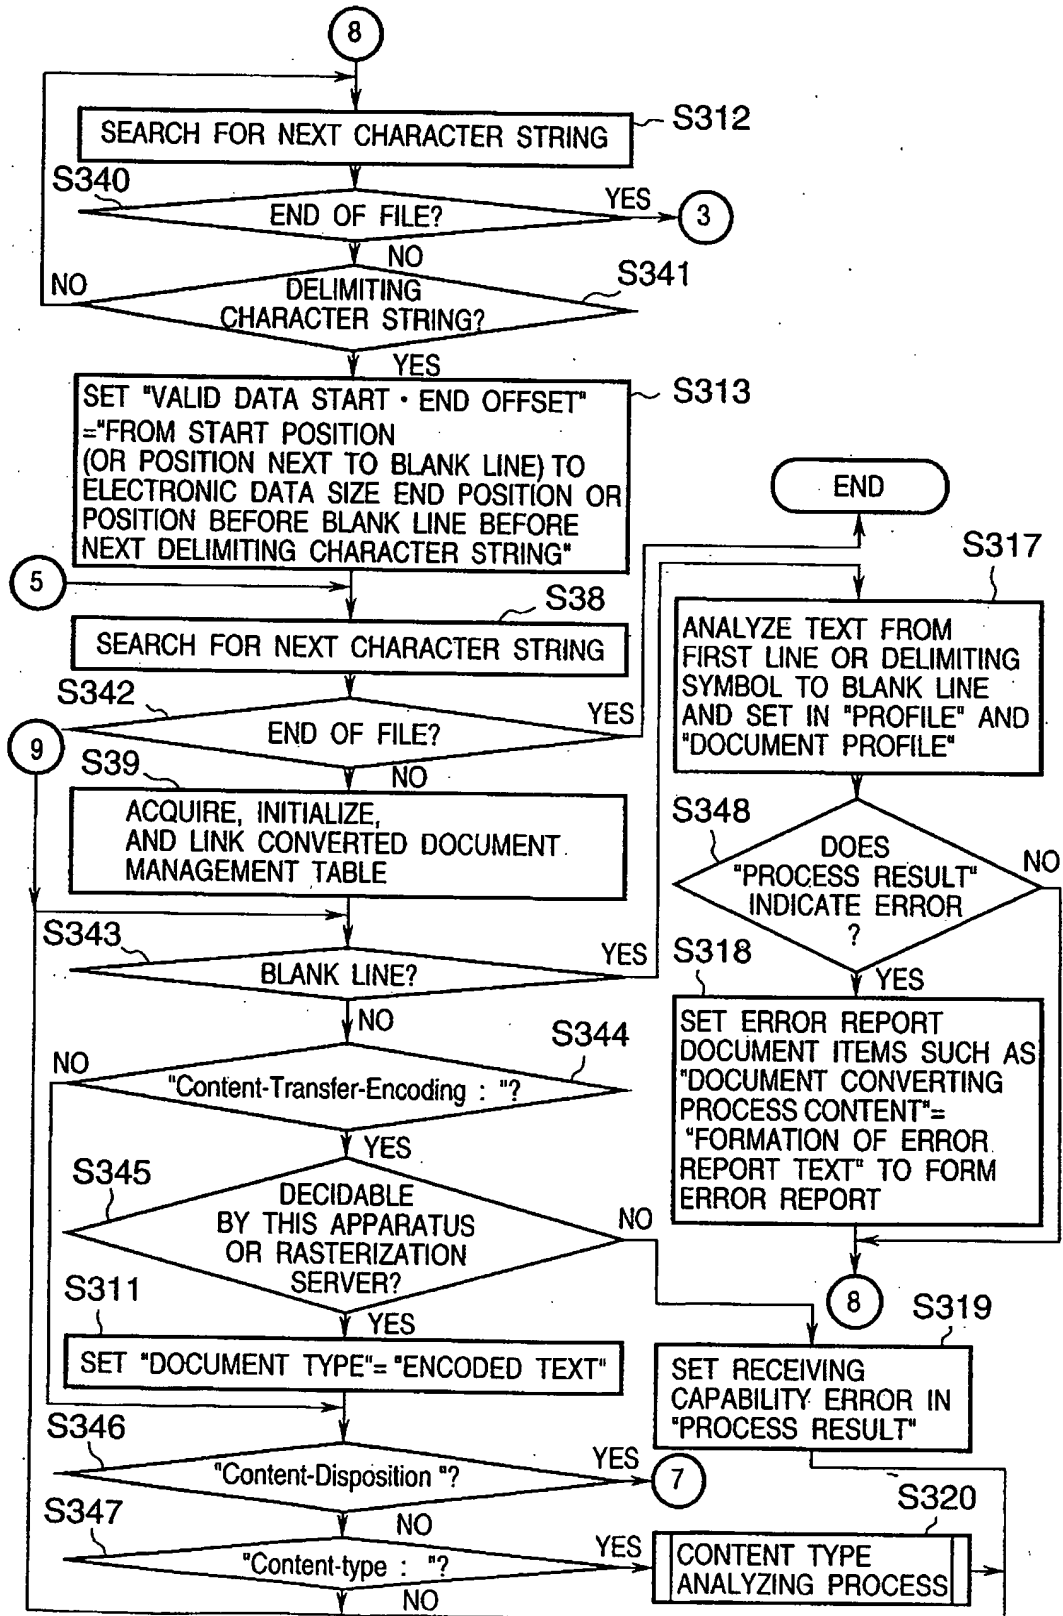


FIG. 19

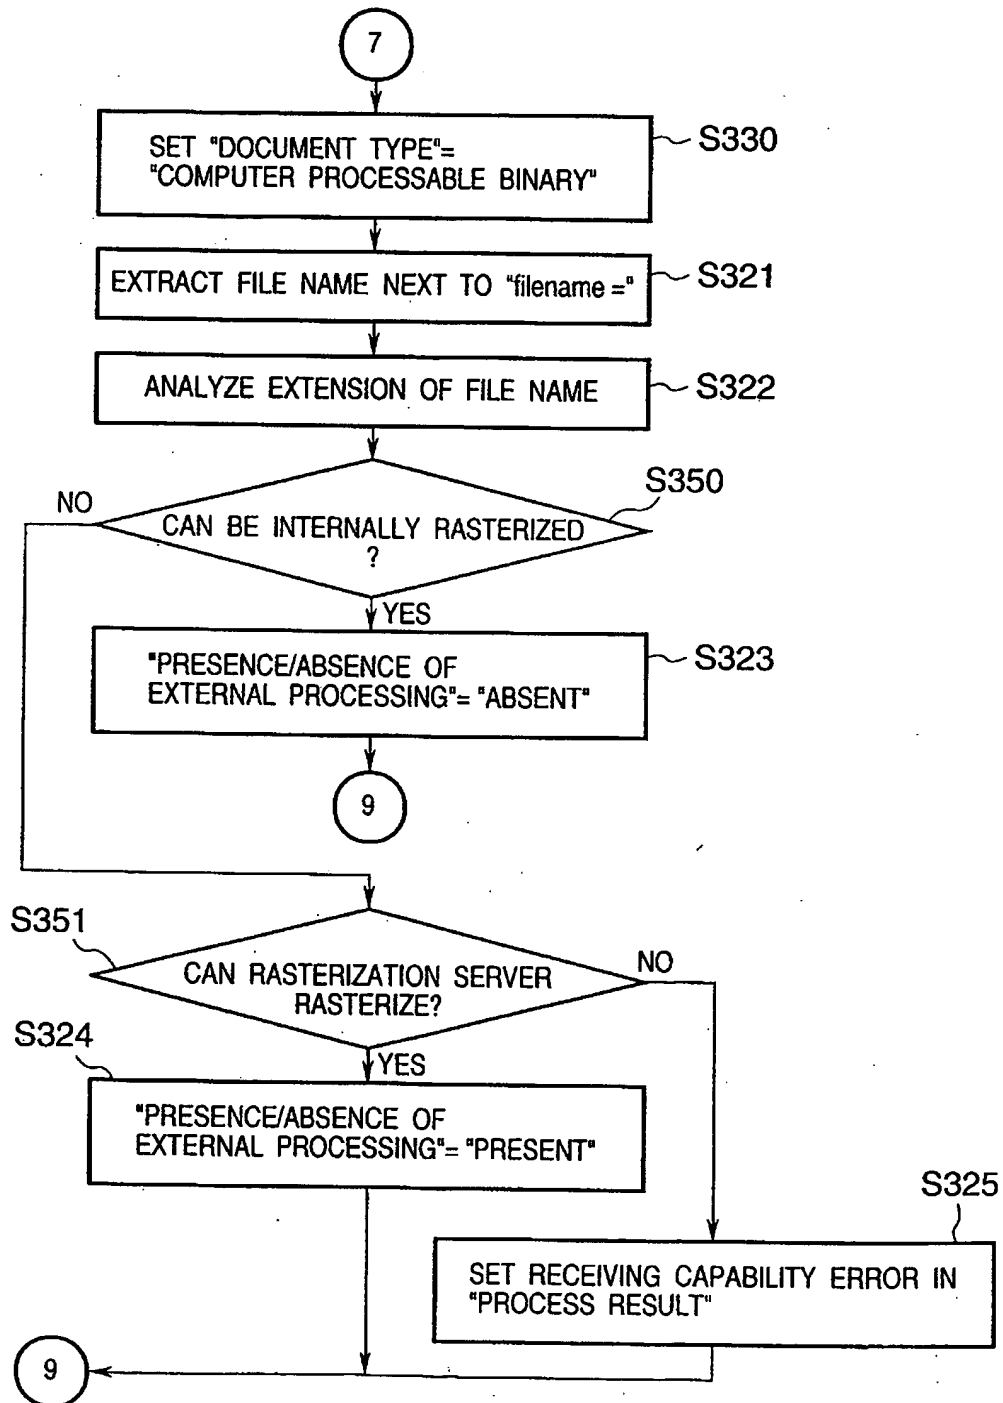


FIG. 20

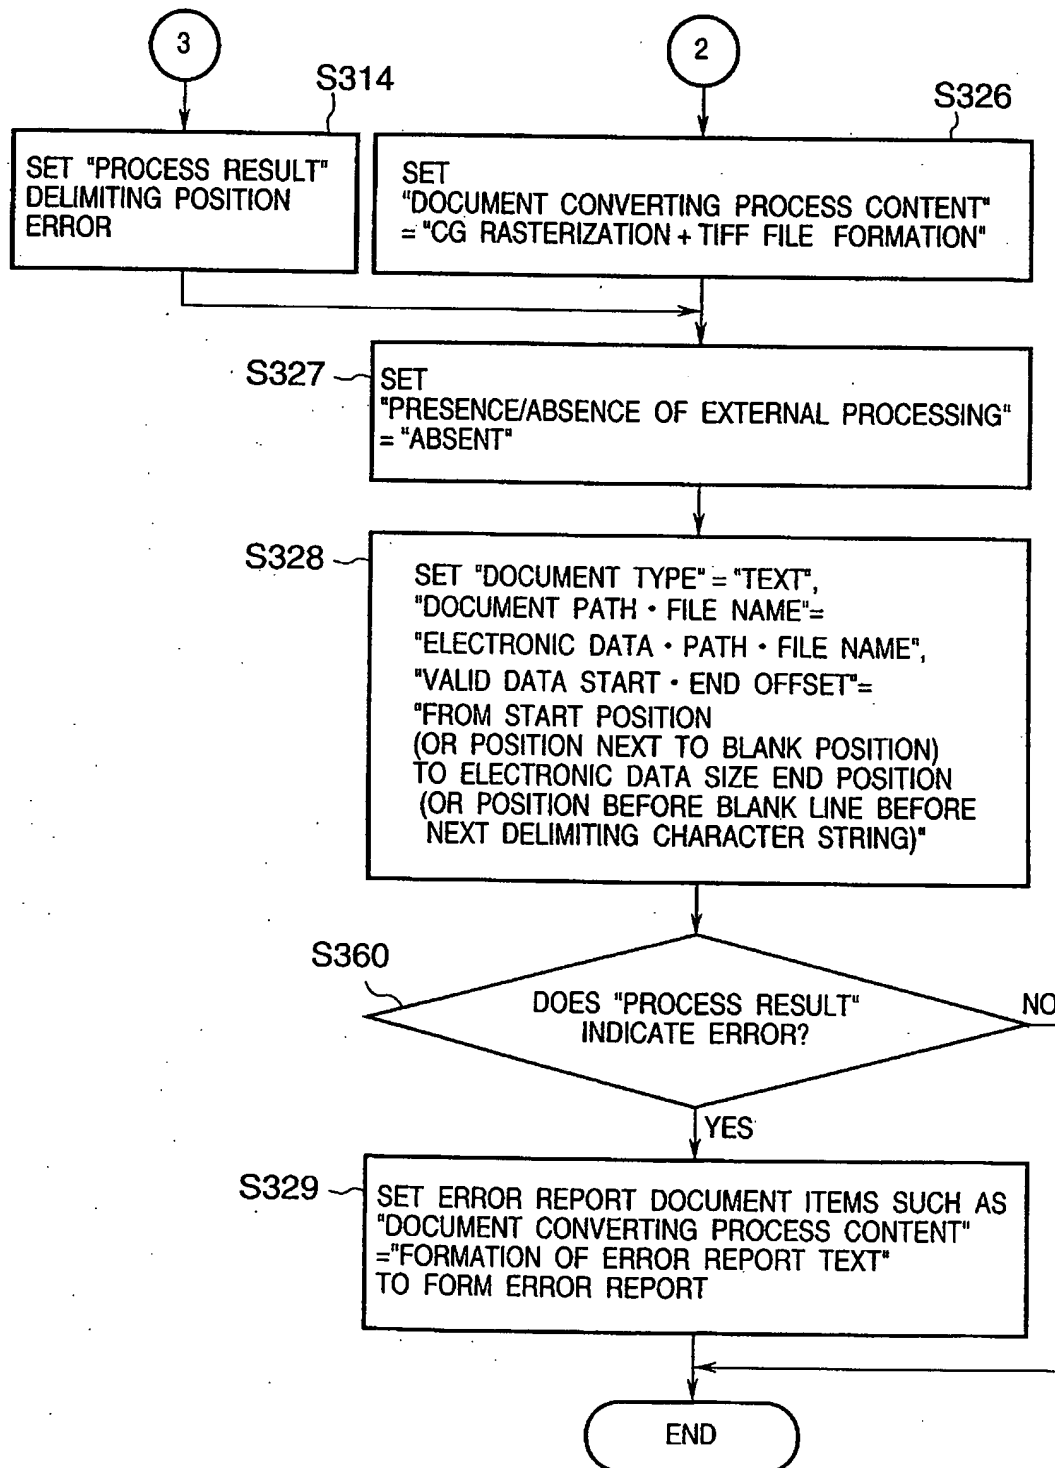


FIG. 21

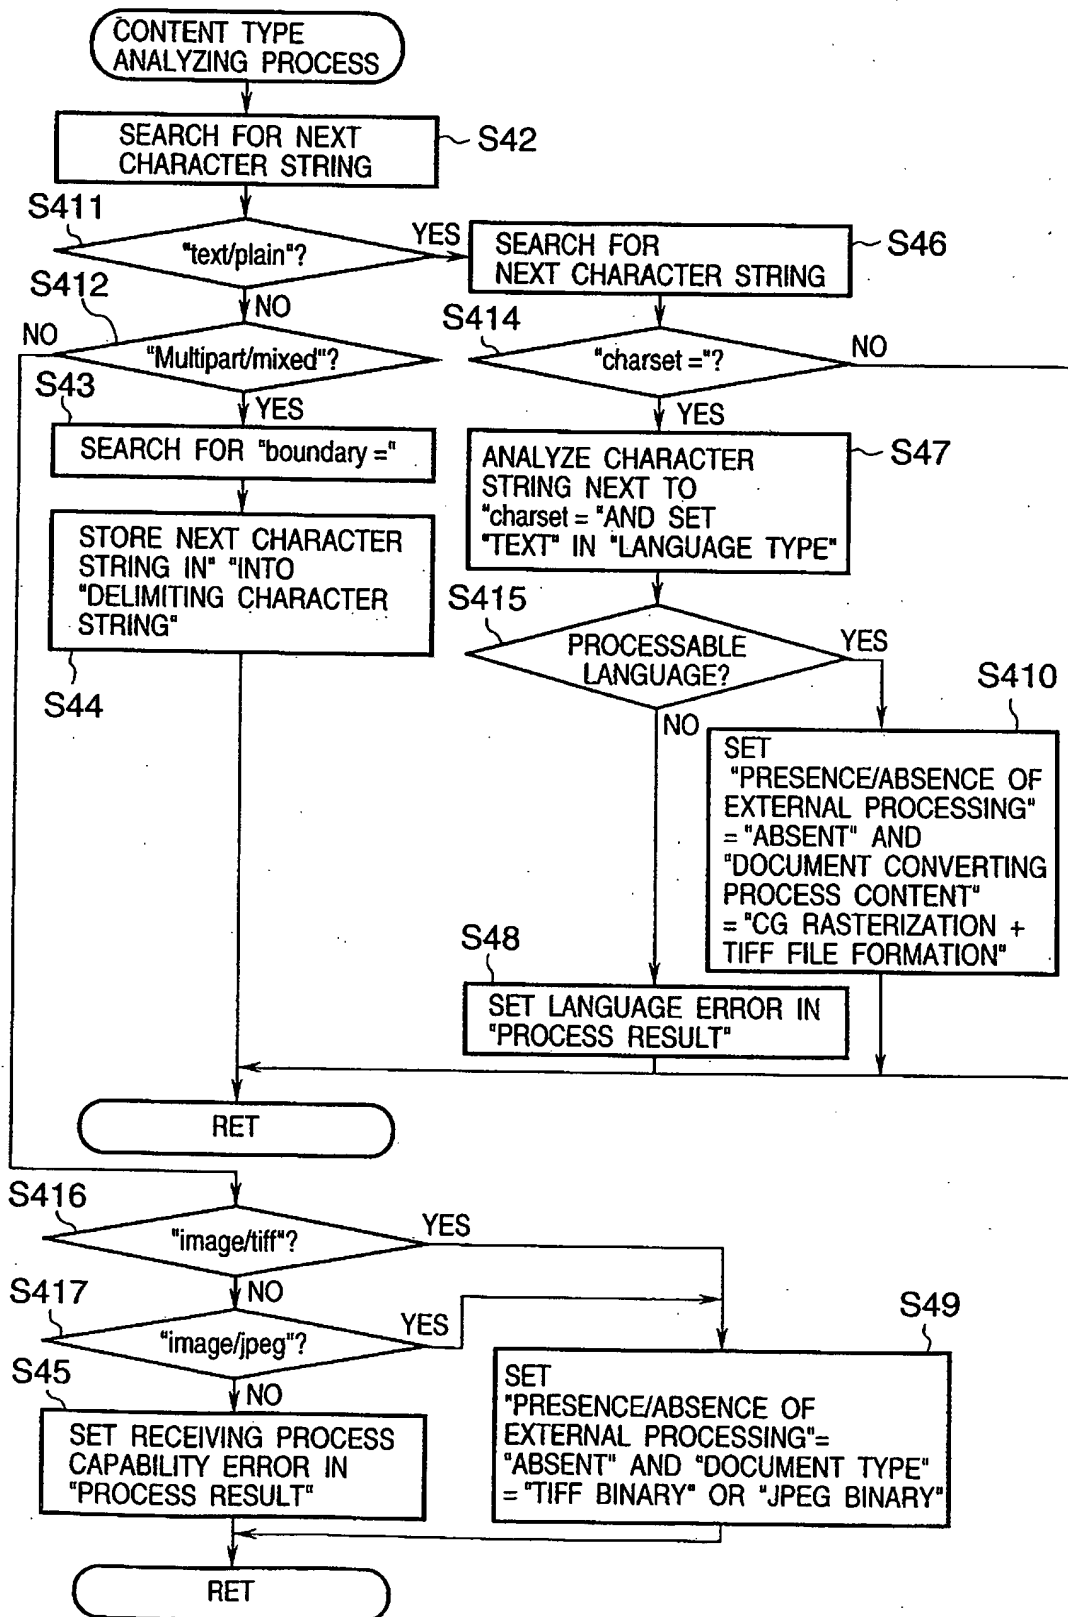


FIG. 22

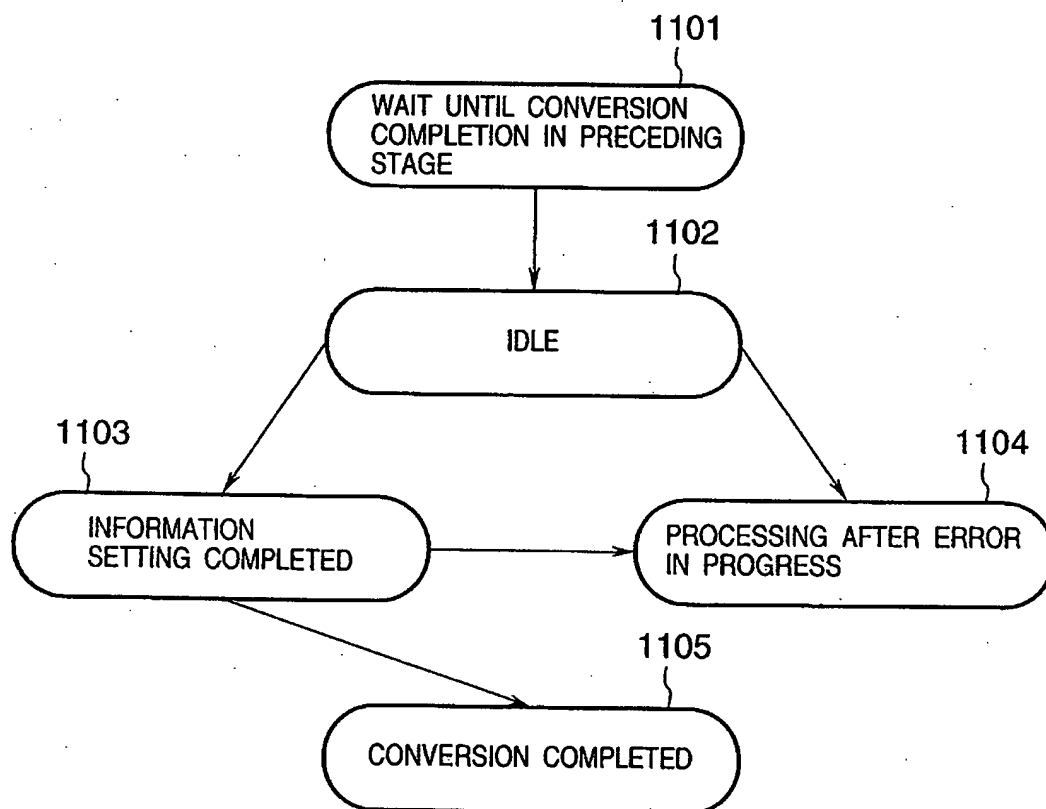


FIG. 23

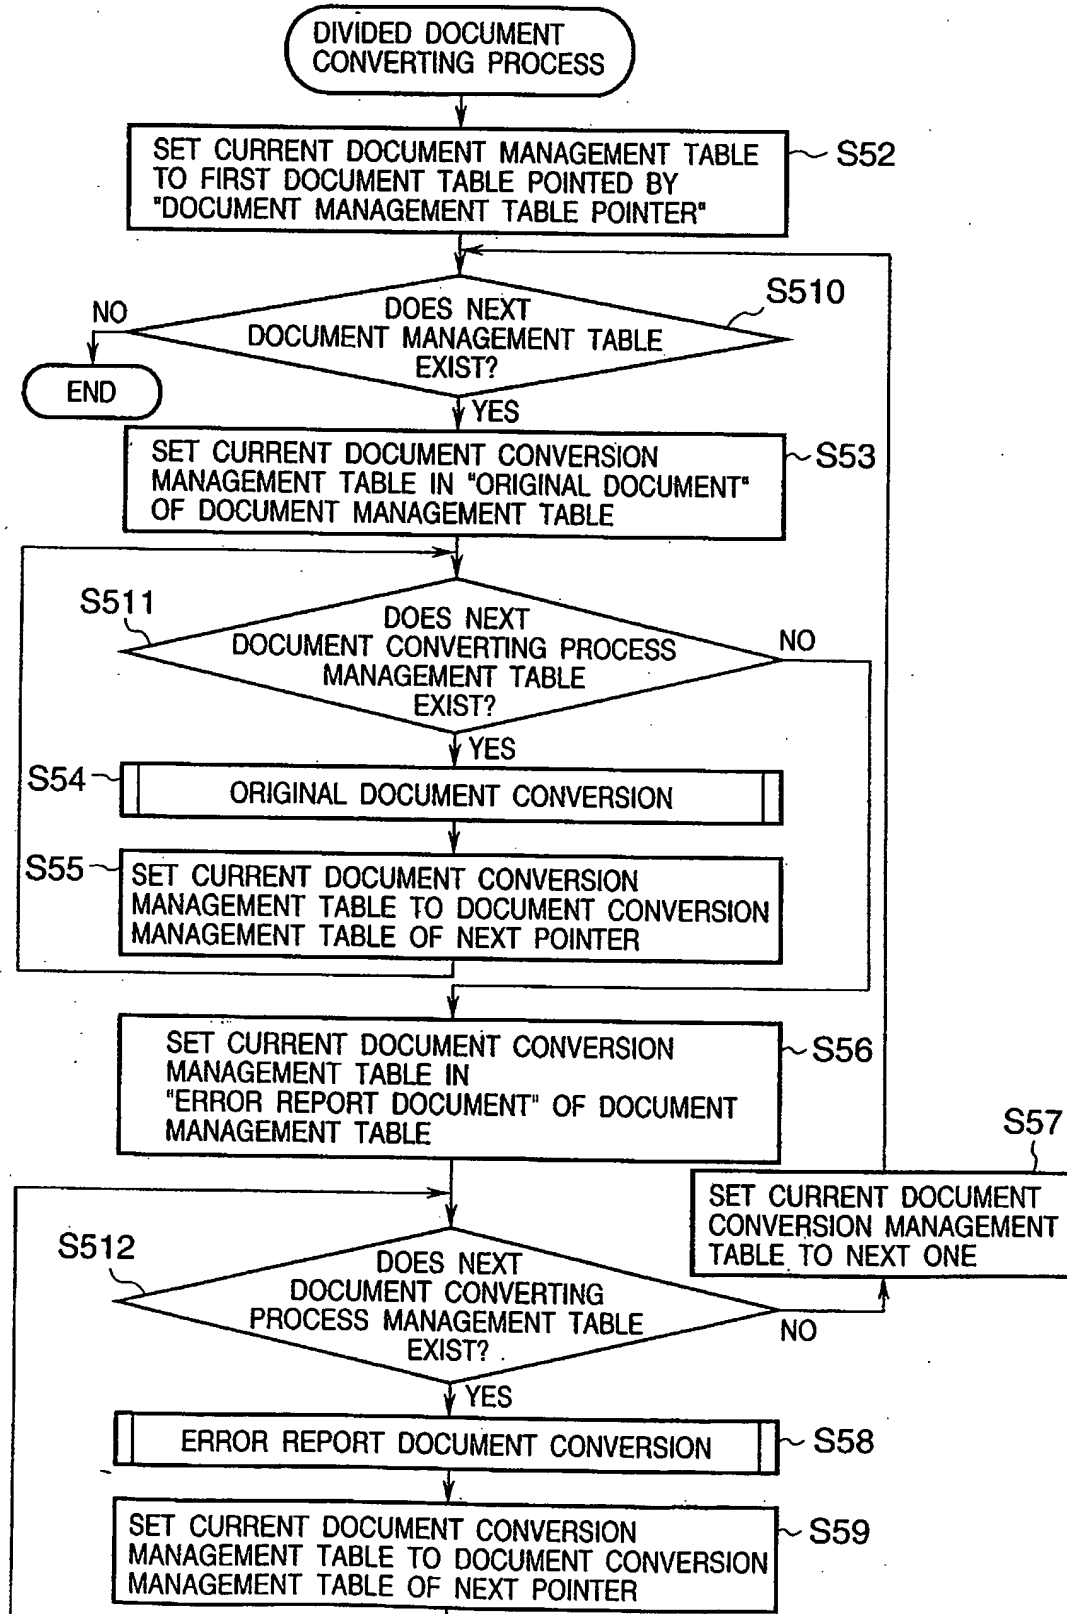


FIG. 24

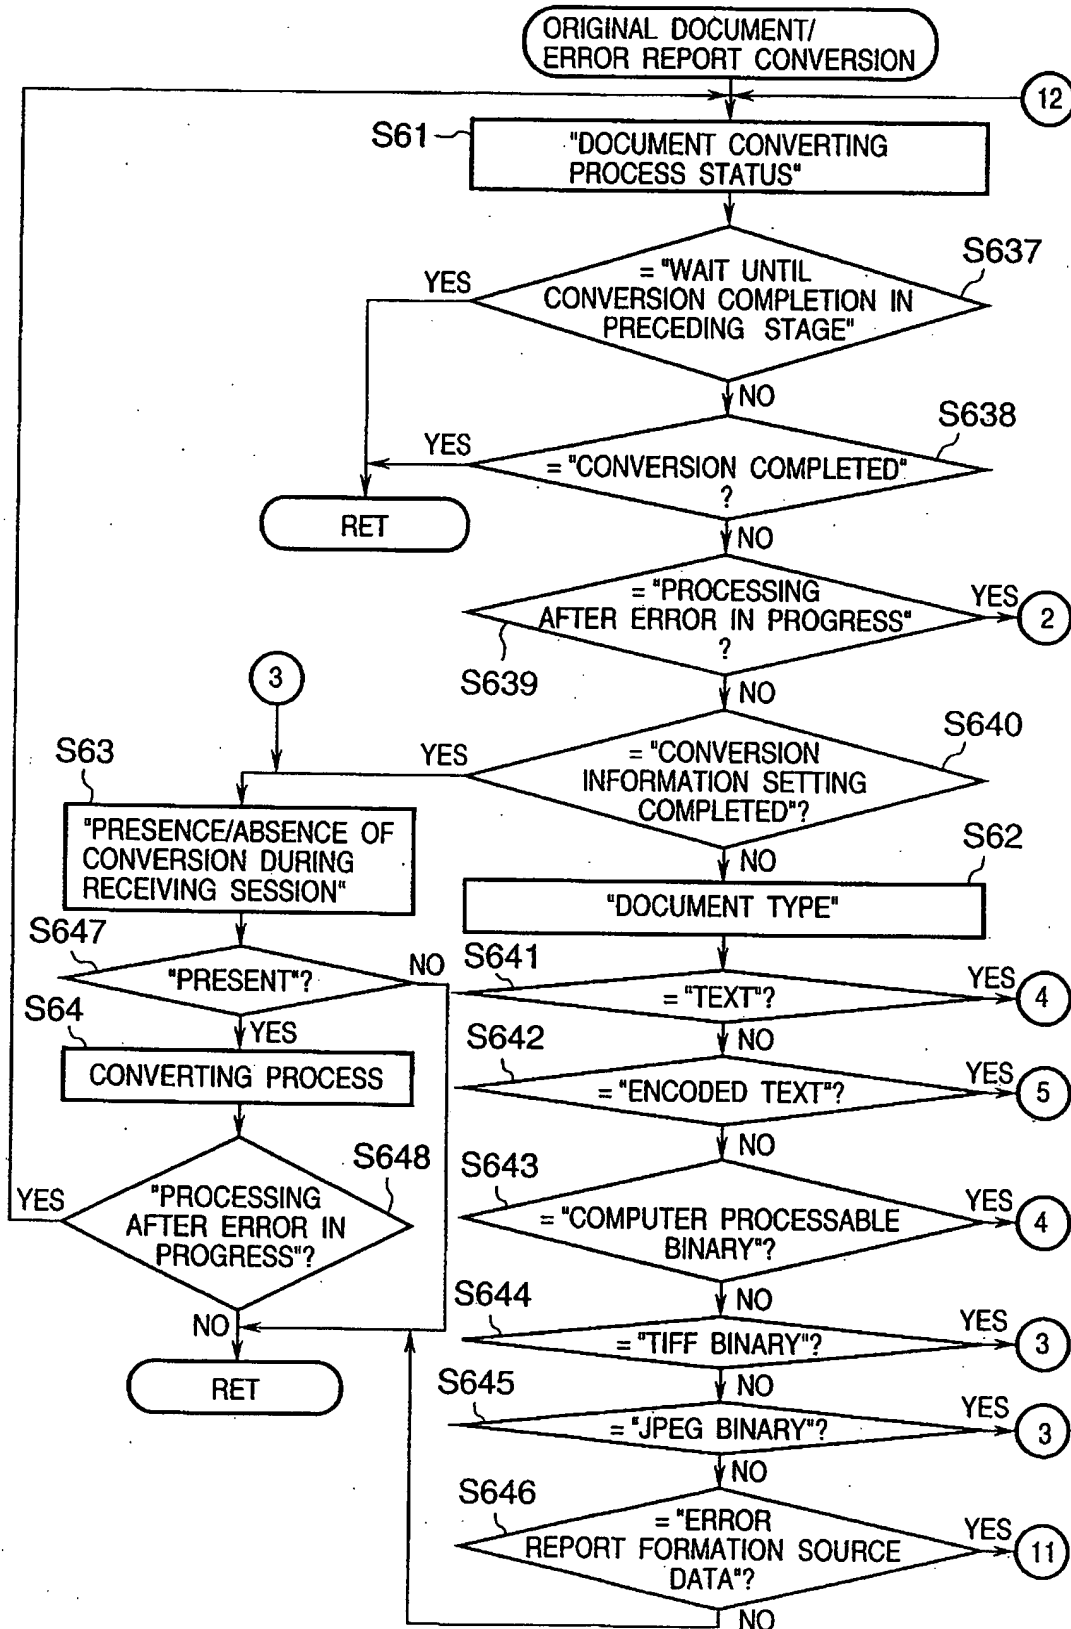


FIG. 25

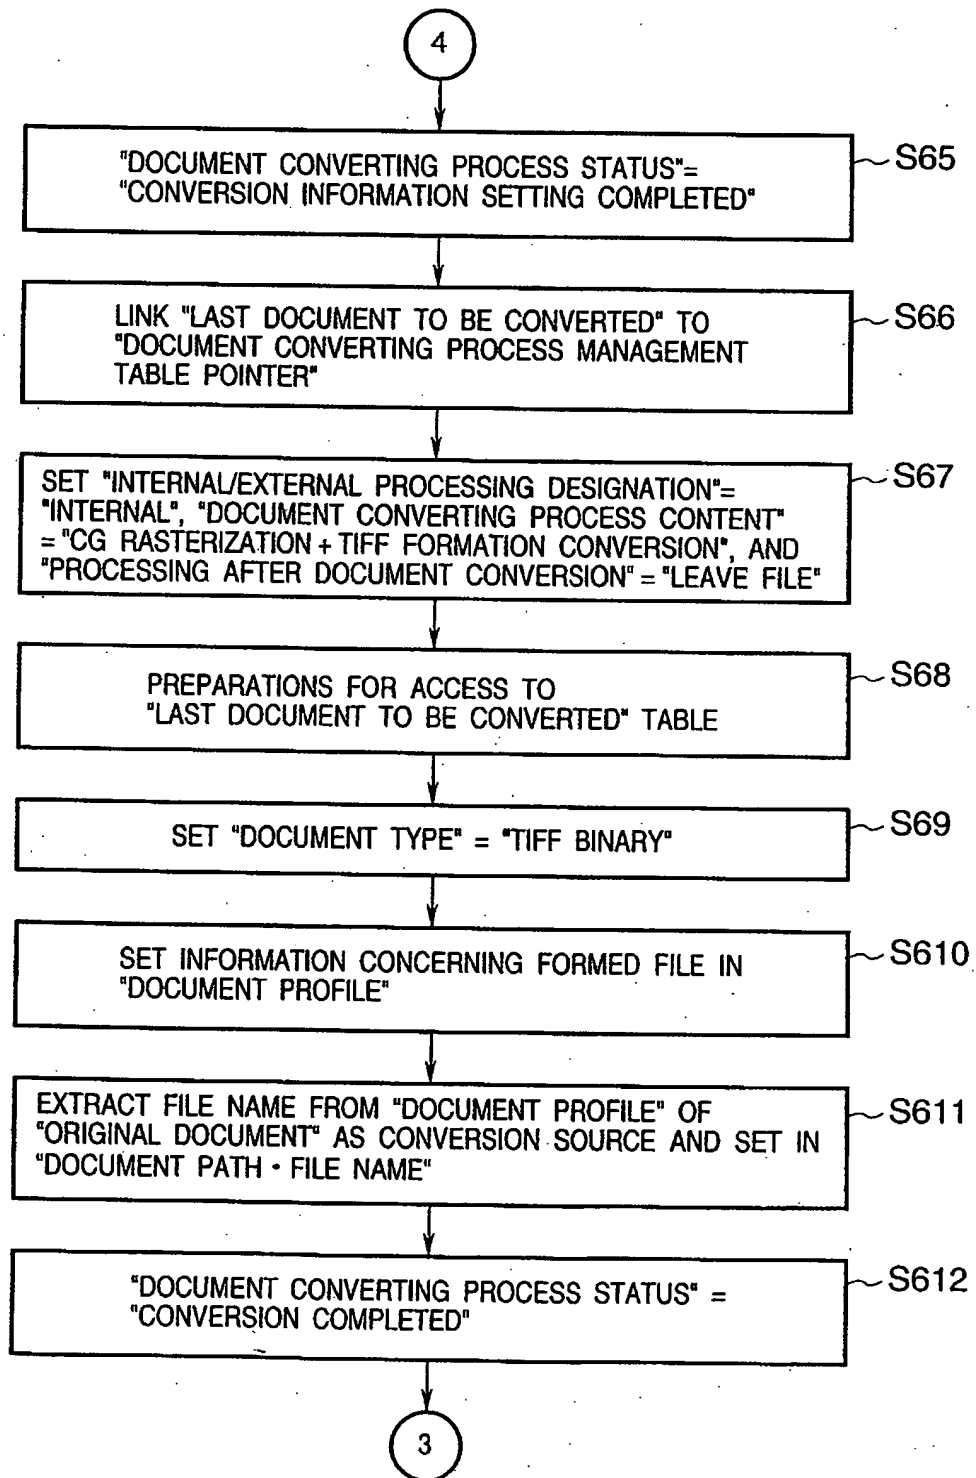


FIG. 26

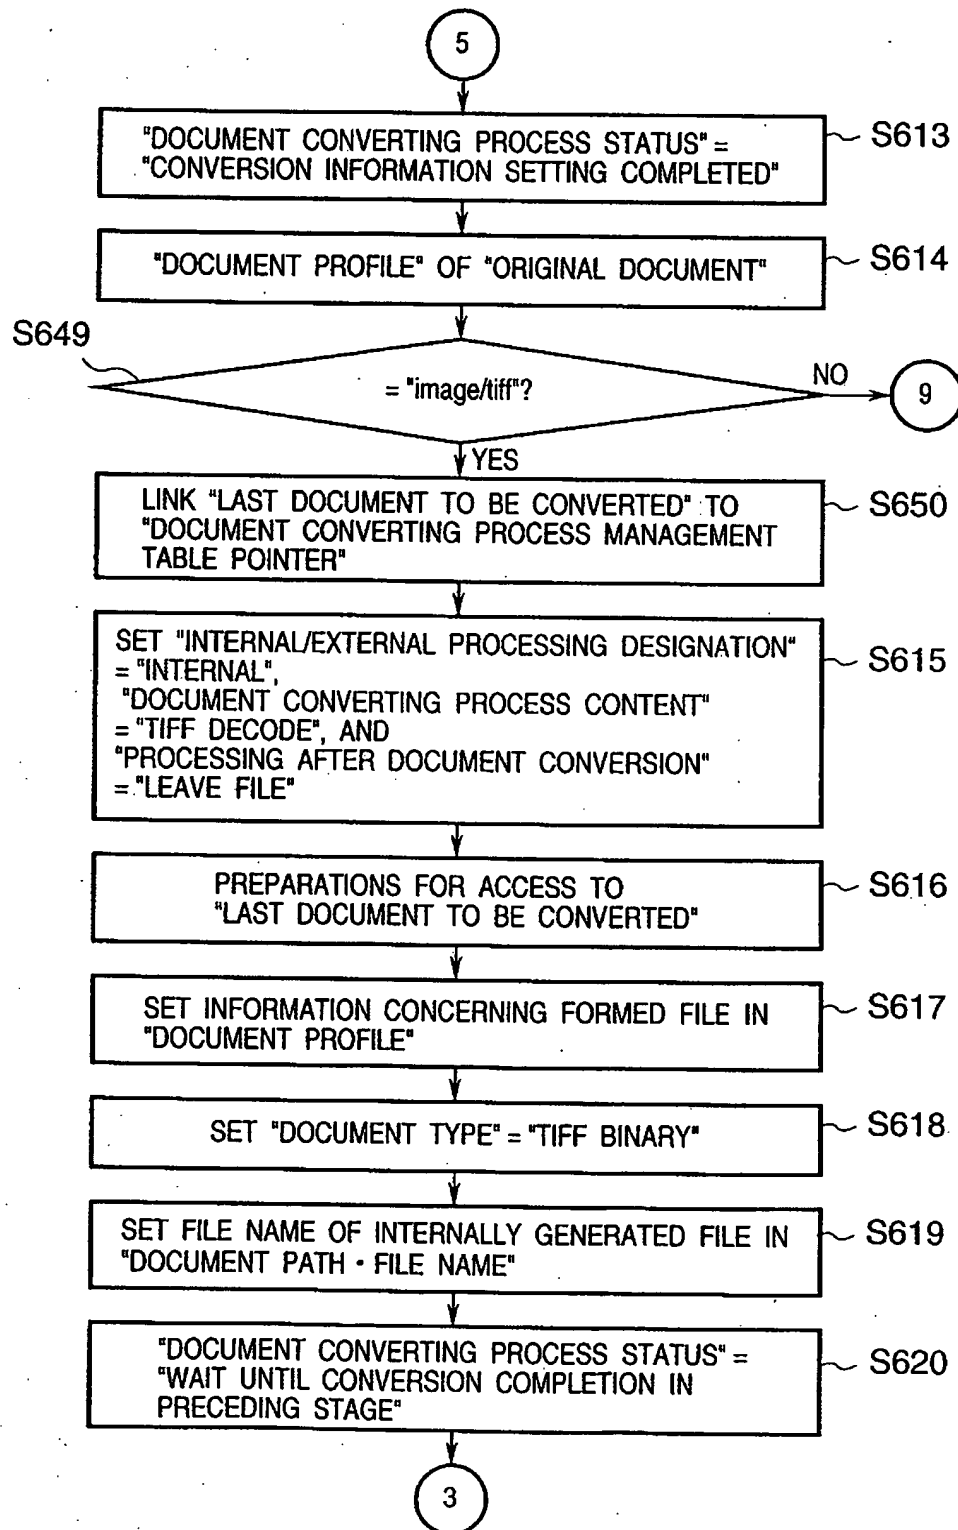


FIG. 27

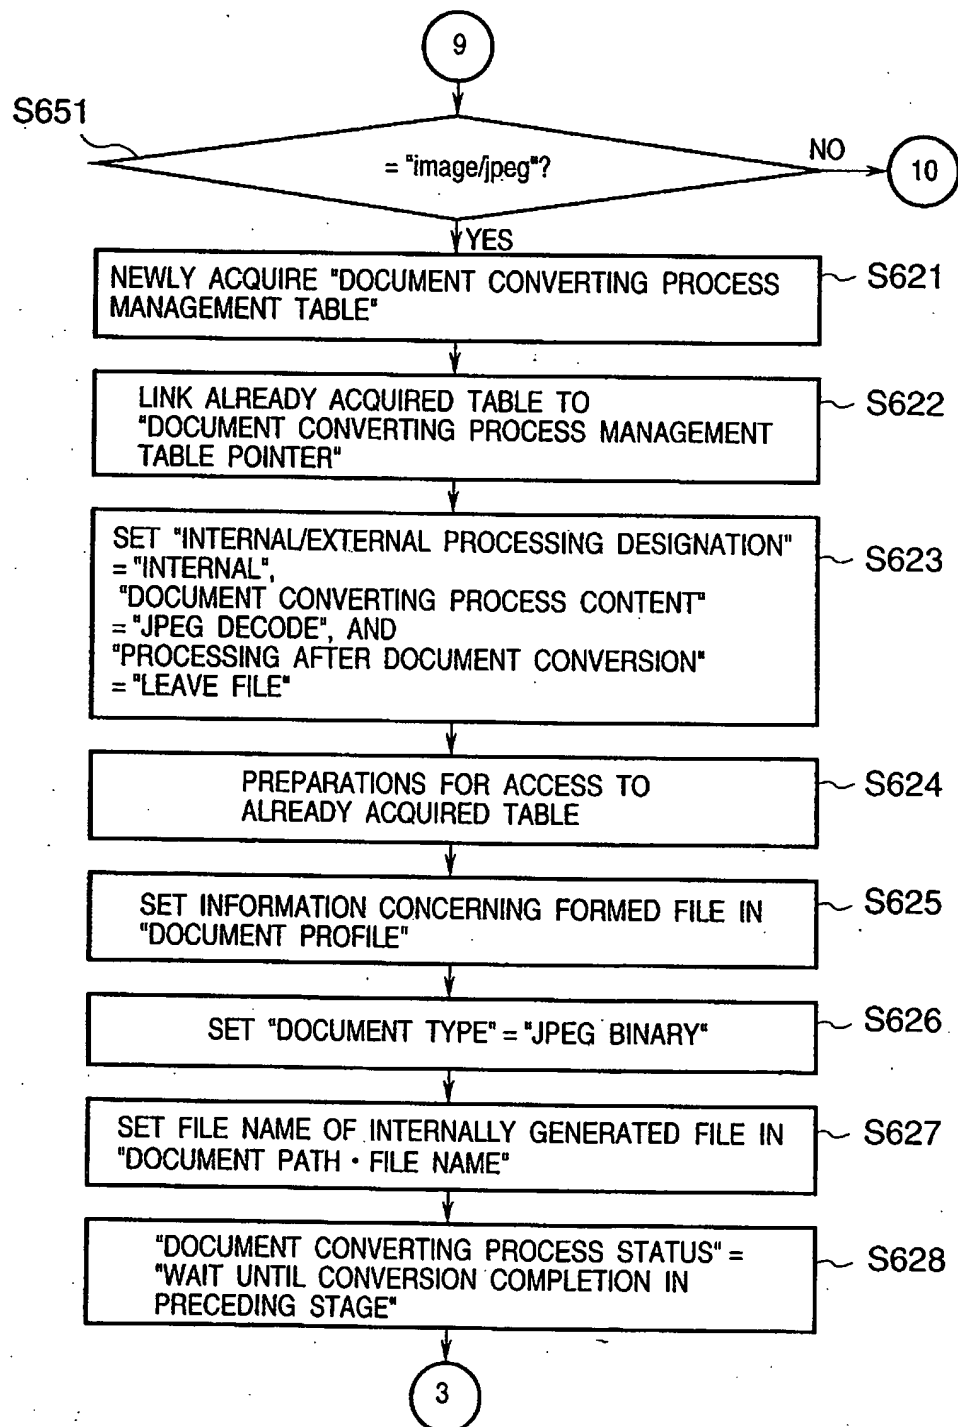


FIG. 28

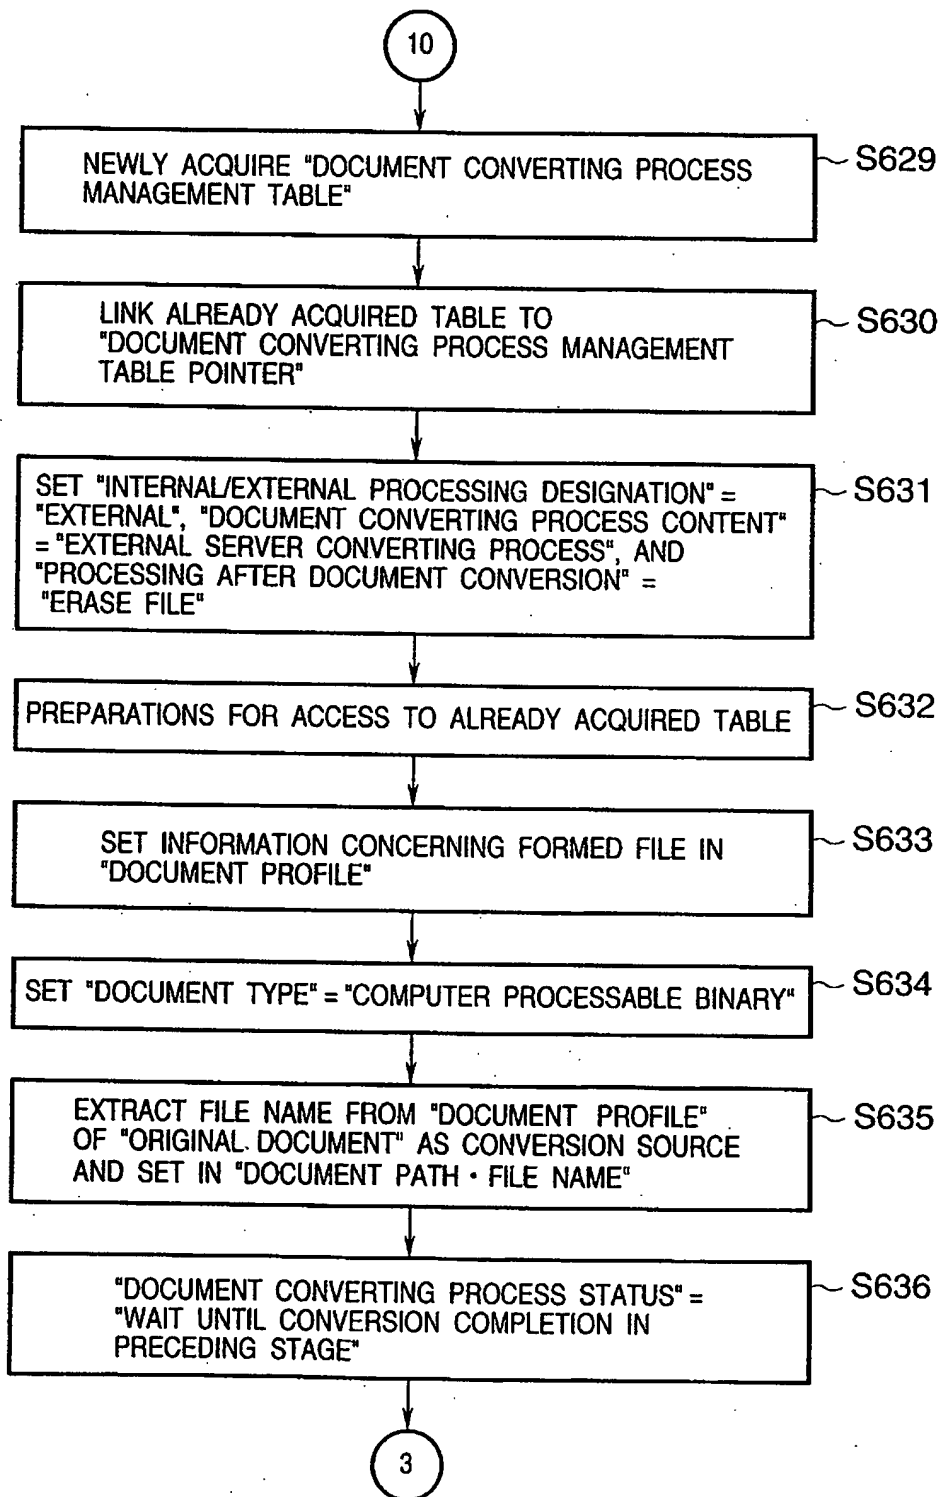


FIG. 29

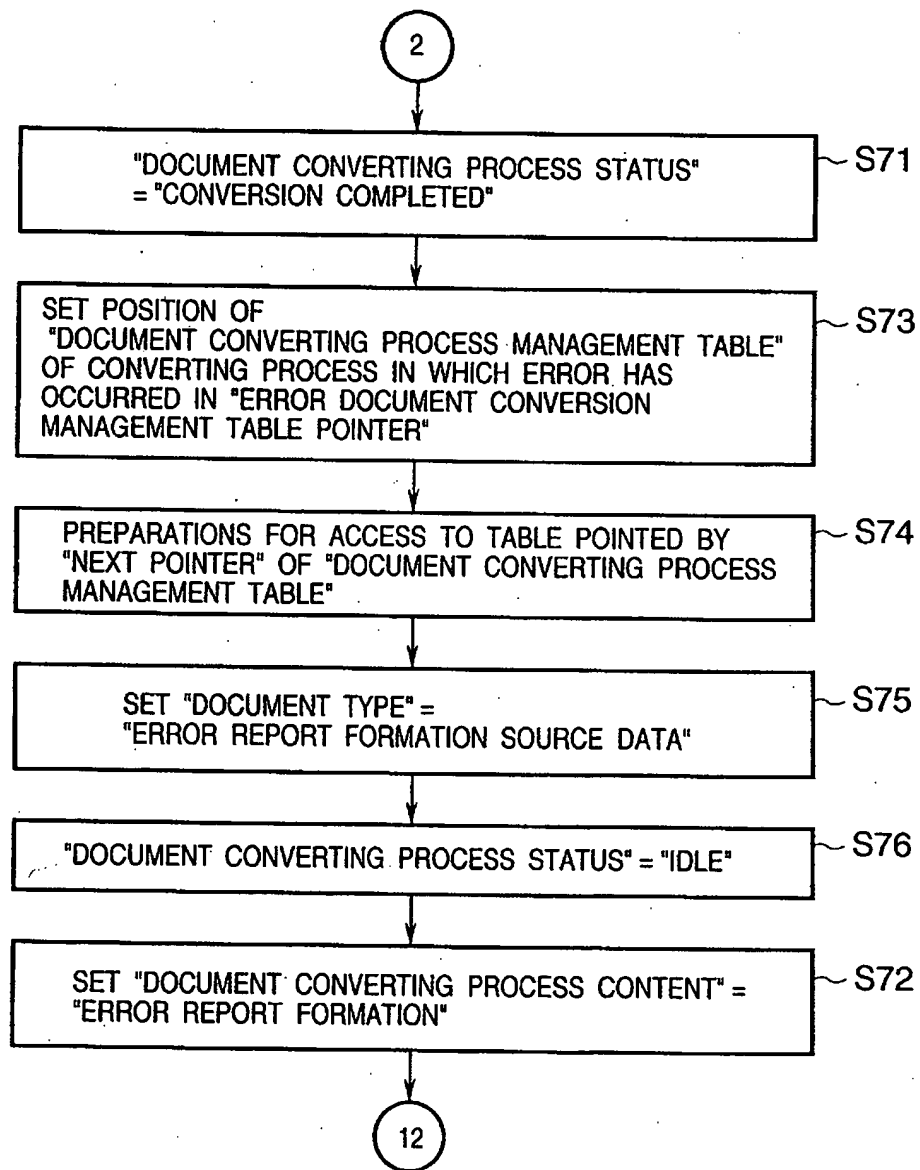


FIG. 30

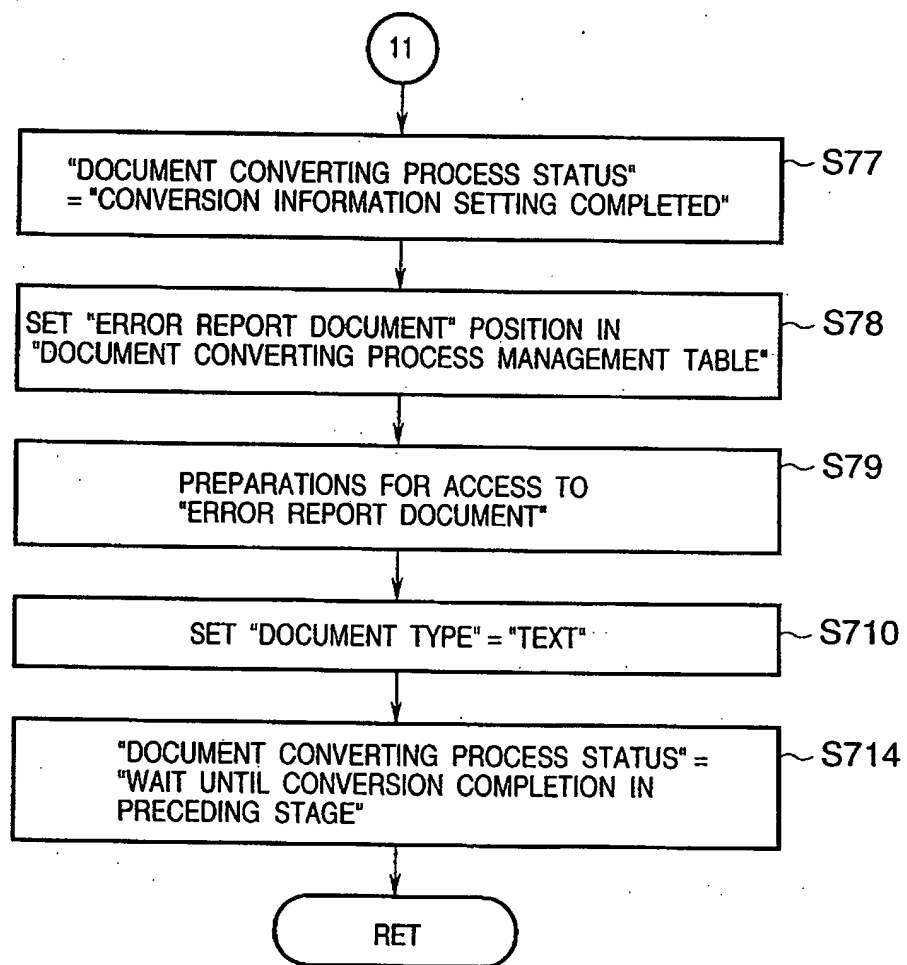


FIG. 31

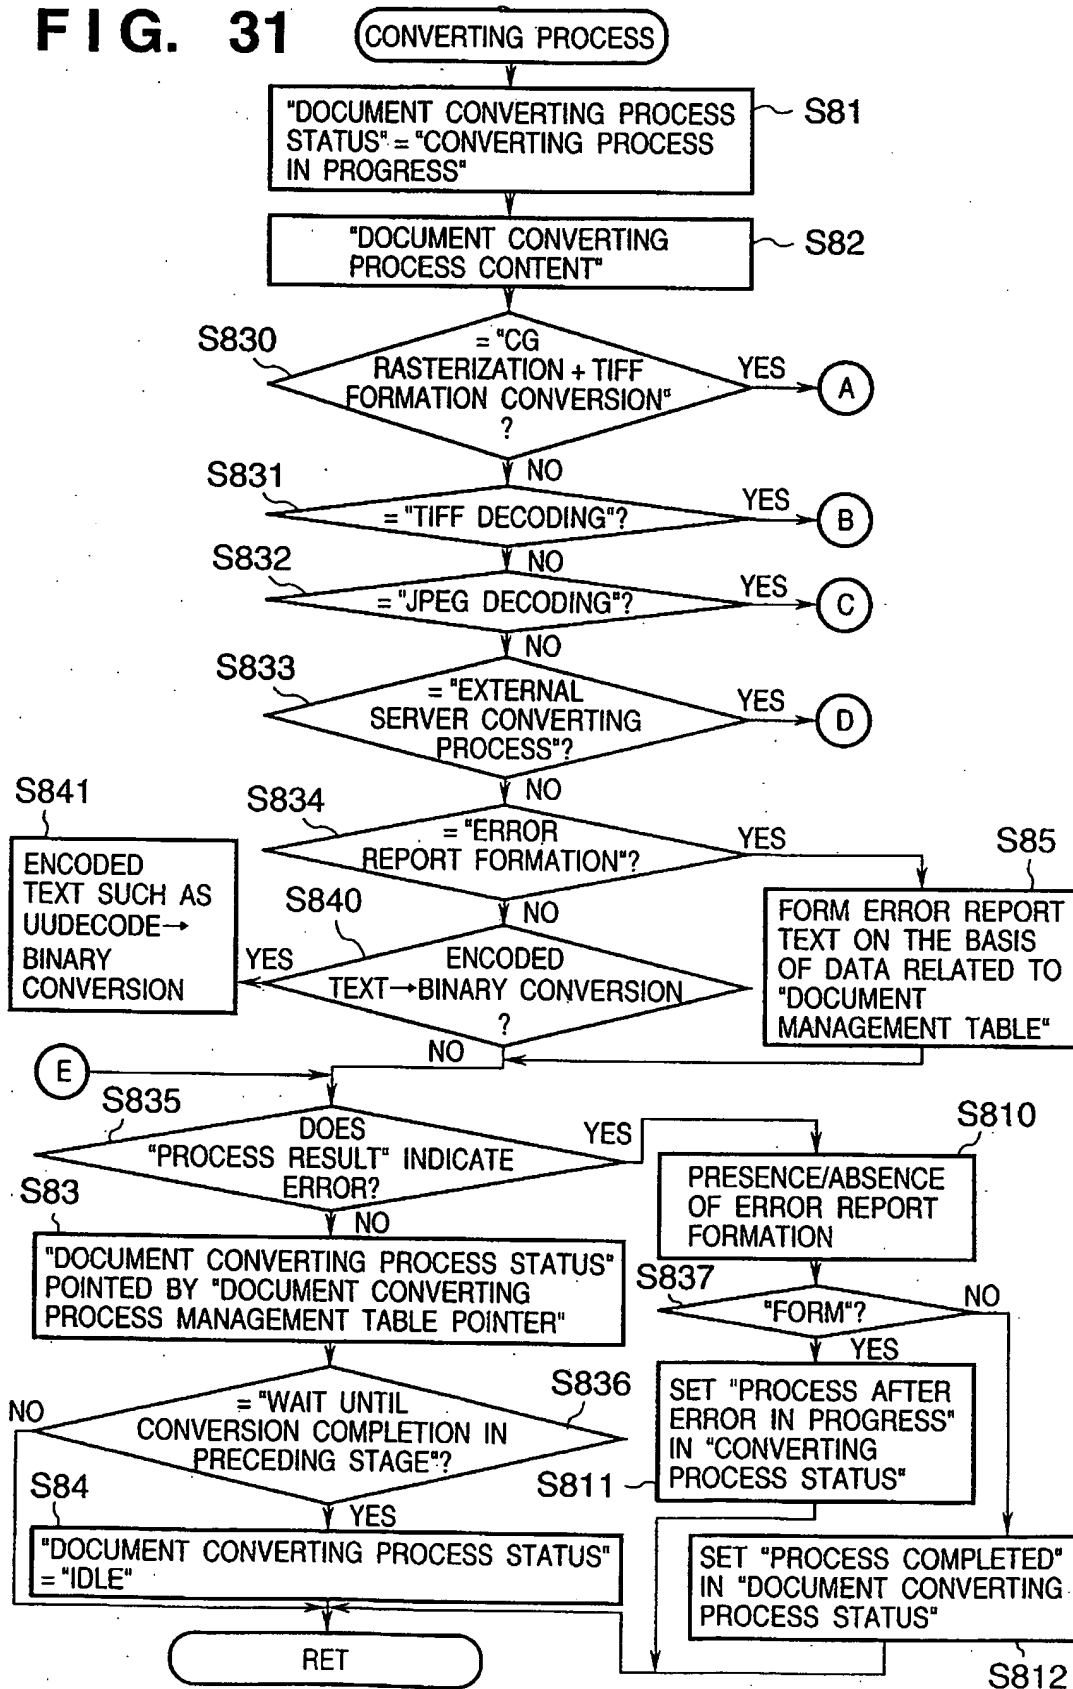


FIG. 32

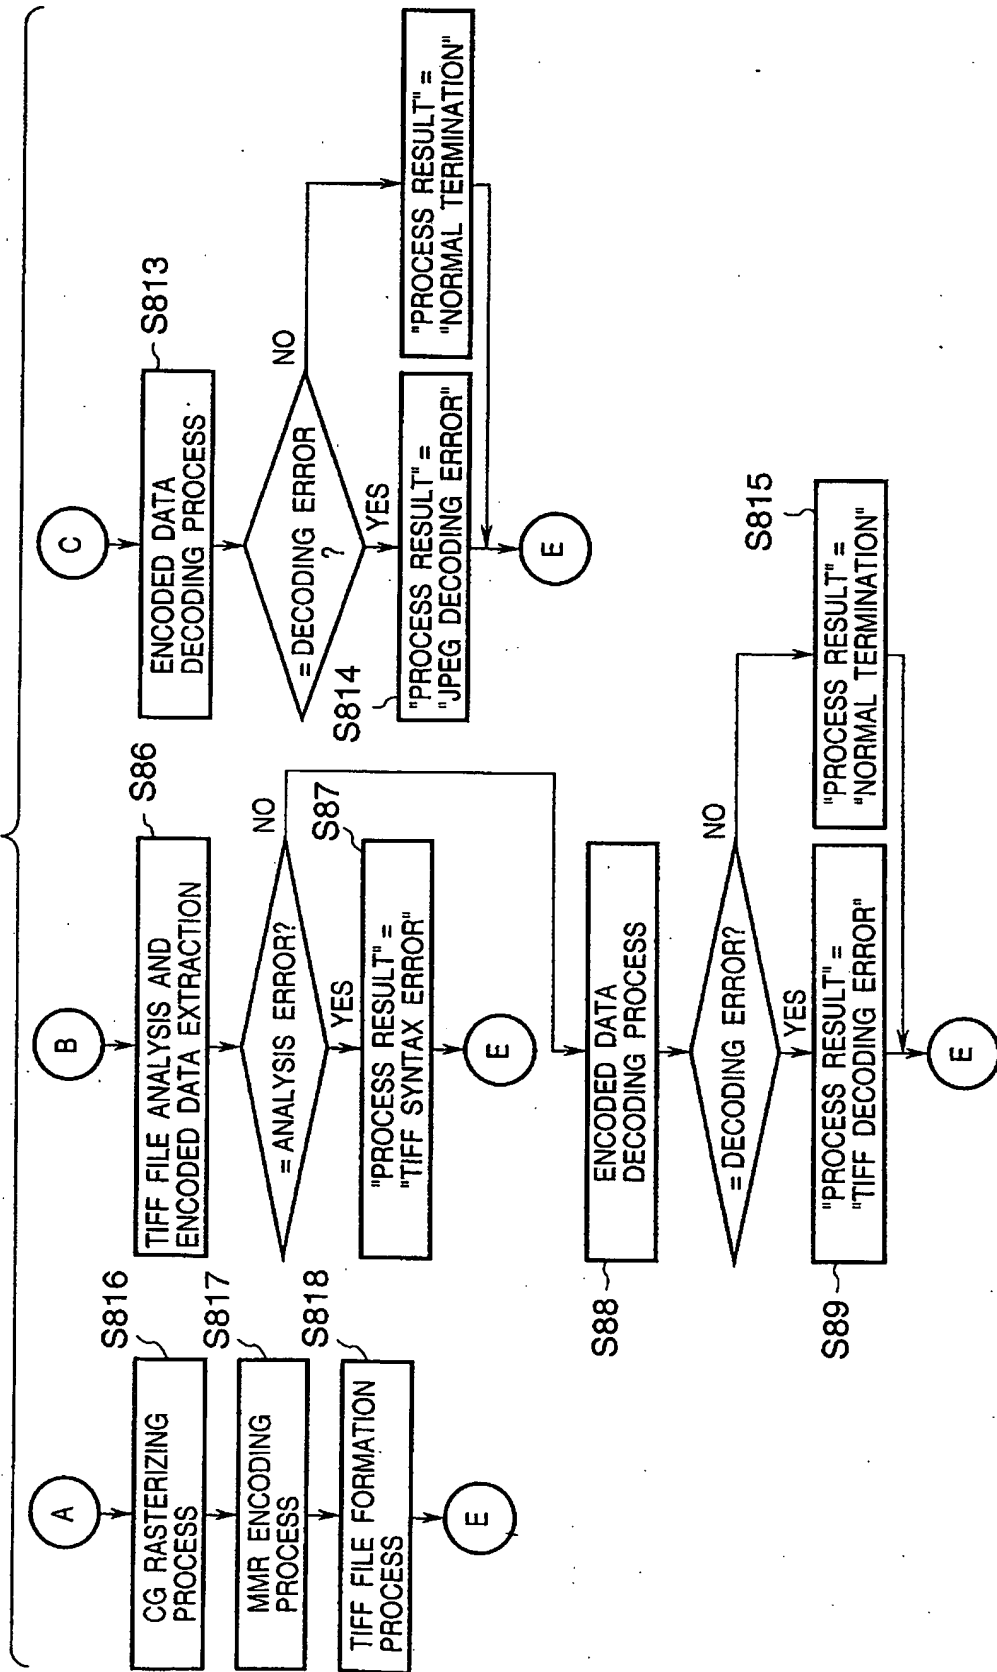


FIG. 33

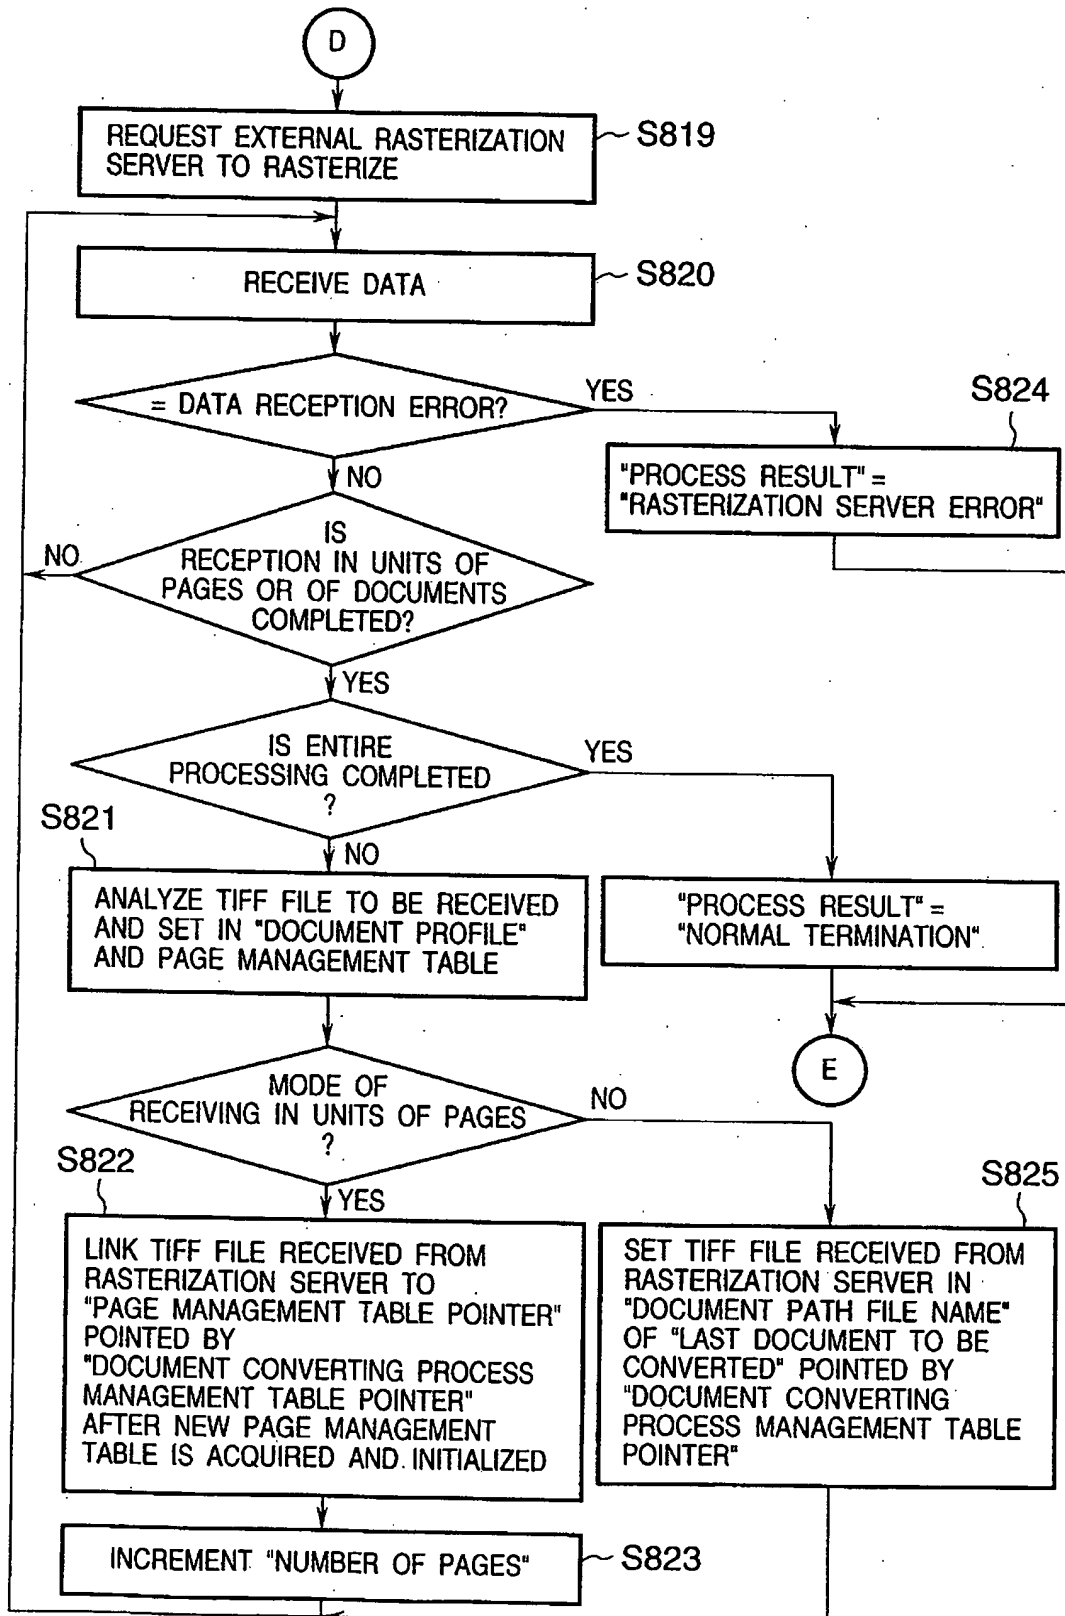


FIG. 34

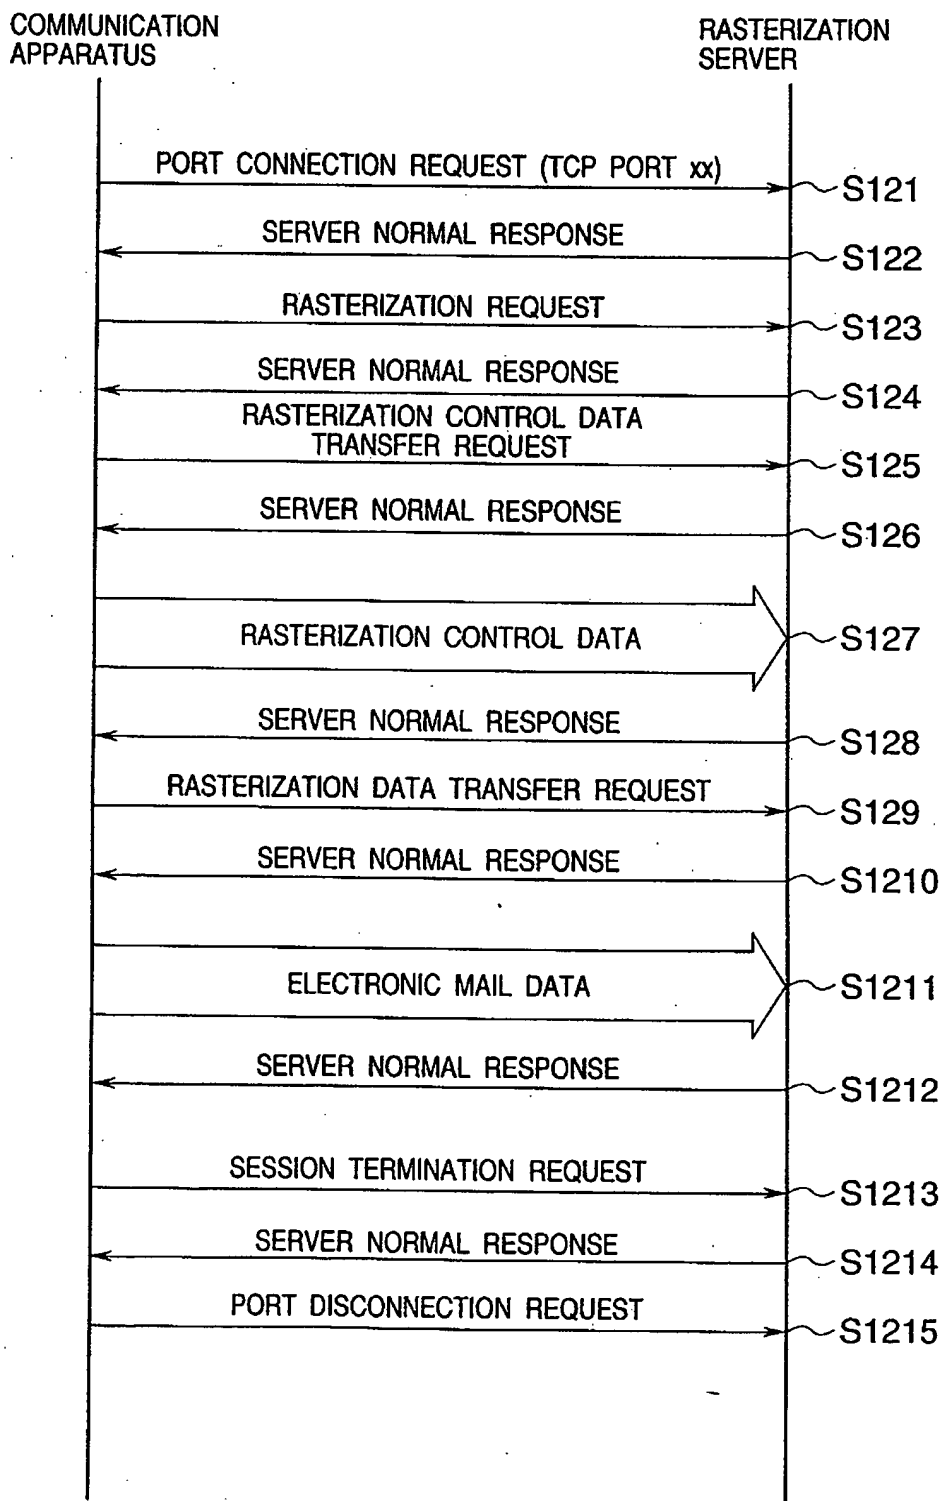


FIG. 35

RASTERIZATION
SERVER
APPARATUS

COMMUNICATION
APPARATUS

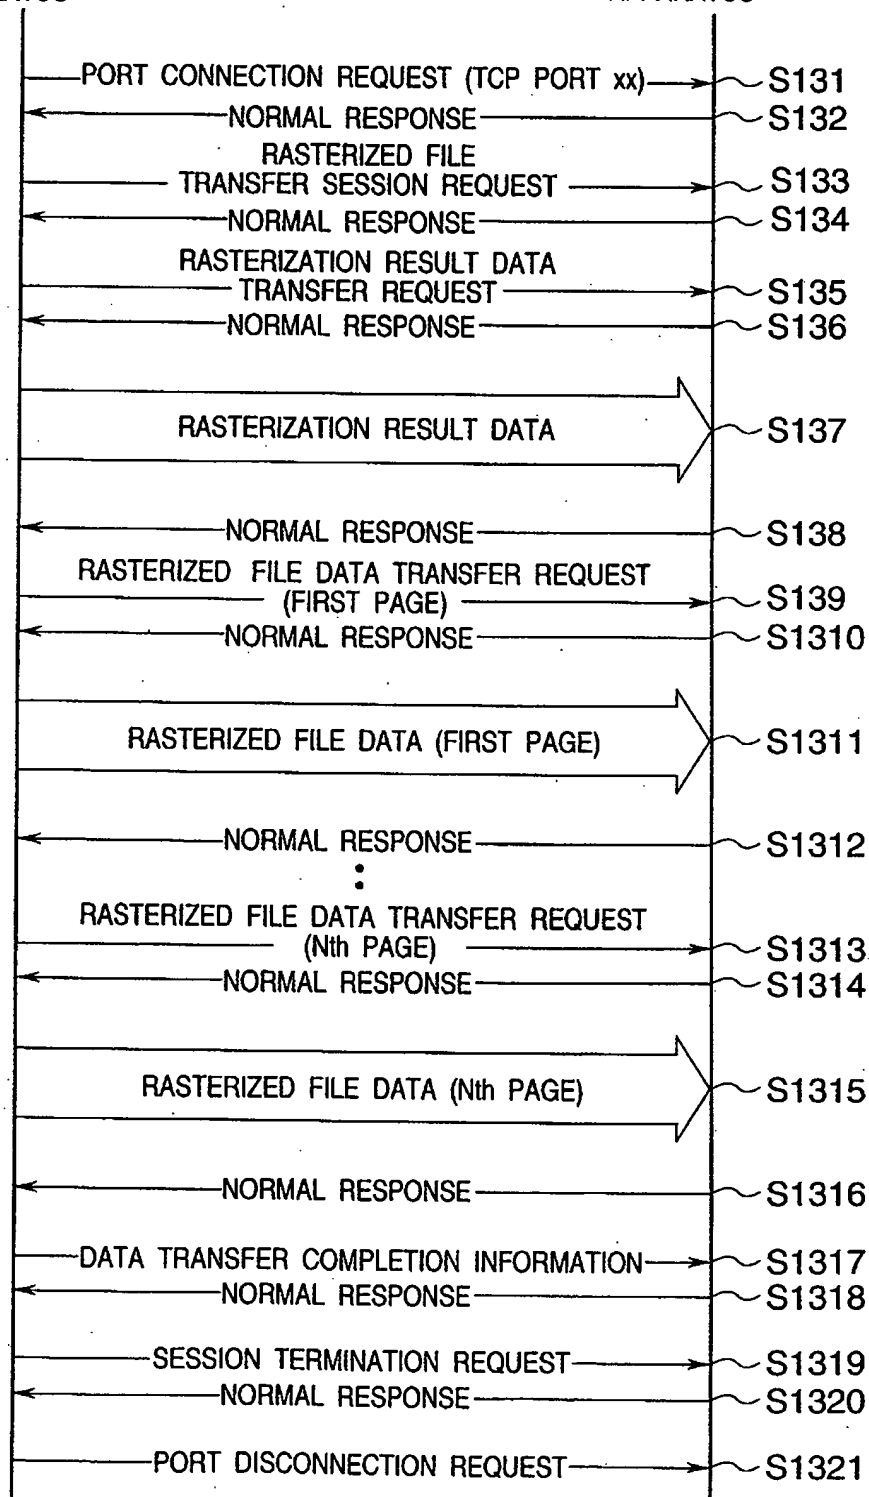


FIG. 36

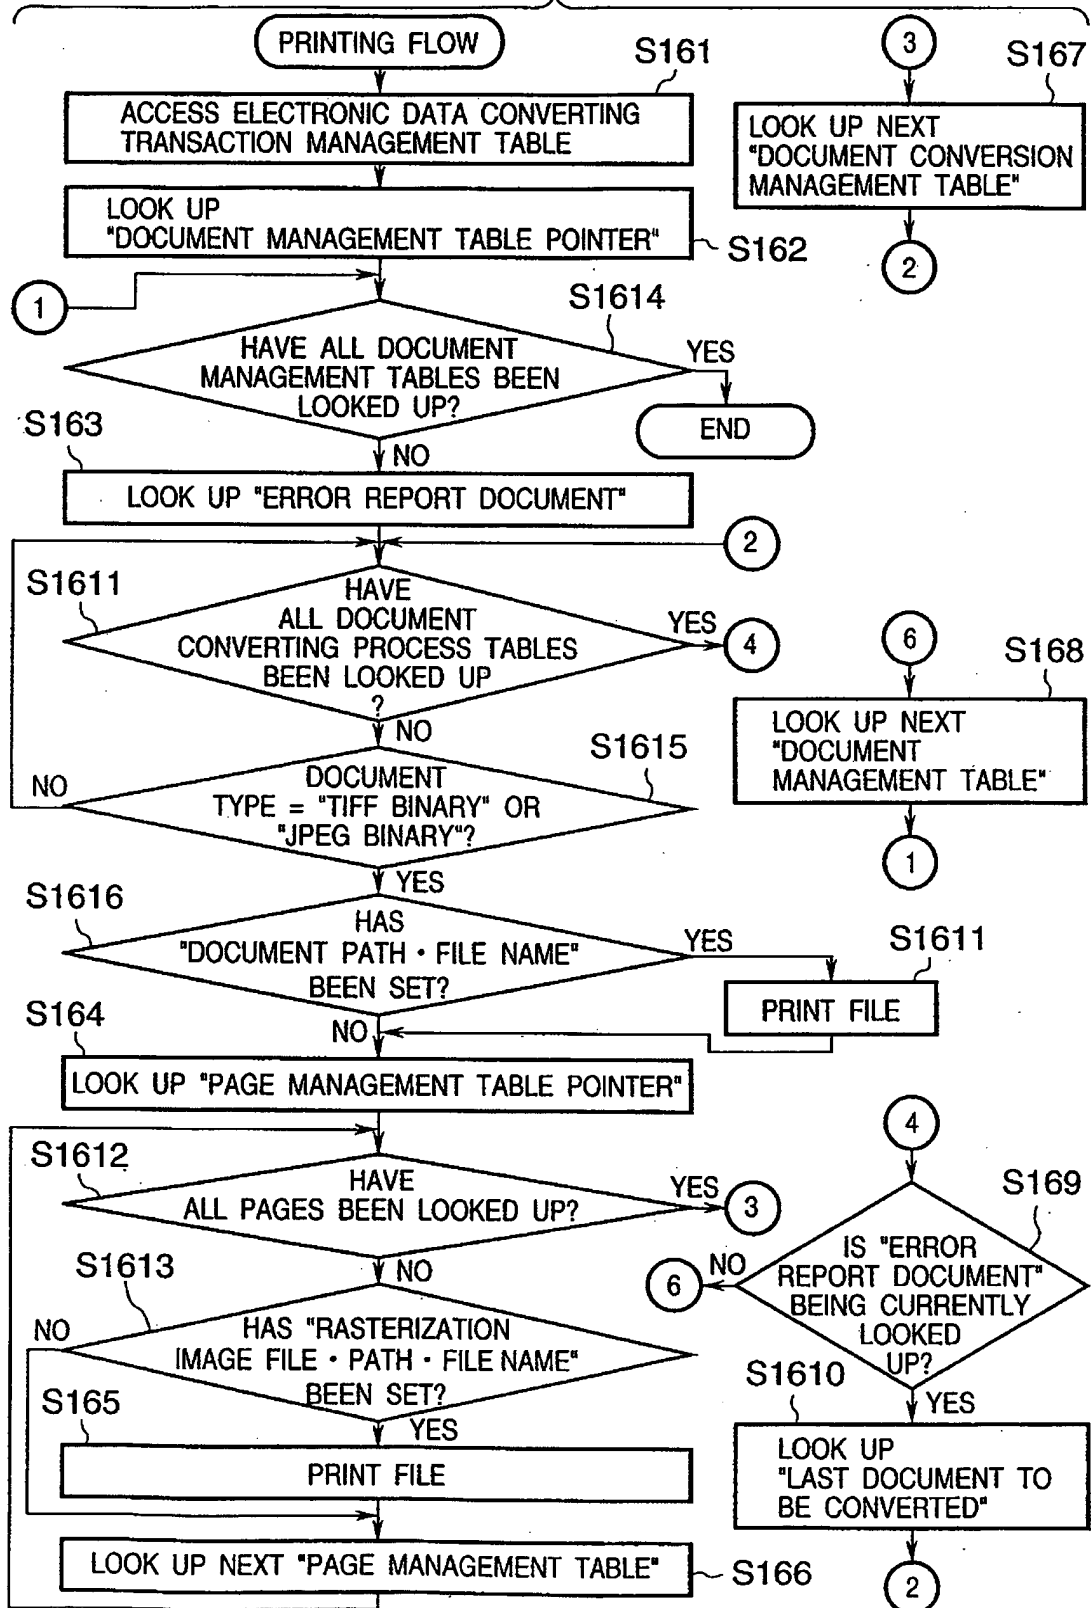


FIG. 37

★ IMAGE RASTERIZATION ERROR REPORT ★

DOCUMENT RECEIVED FROM FOLLOWING ADDRESS
COULD NOT BEEN RASTERIZED INTO IMAGE OWING TO
COMMUNICATION ERROR WITH RASTERIZATION SERVER

[SOURCE INFORMATION]

PROTOCOL : E-mail

SOURCE ADDRESS : taro_yamada@mail_srv.ccc.dd.ee

From : taro_yamada@mail_srv.ccc.dd.ee

To : fax_mail_machine@mail_srv.ccc.dd.ee

Subject : INVESTIGATION REPORT

Mime-Version : 1.0

Content-type : Multipart/Mixed ;

boundary="---Boundary---"

Date : Thu. 19 Jun 1997 21:00:00 +.0999

Message-Id : <19970619215959.TAA99999@mail_srv.ccc.dd.ee>

[DOCUMENT INFORMATION]

DOCUMENT TYPE : ATTACHED FILE

DOCUMENT FILE NAME : report.doc

Content-Transfer-Encoding : x-uuencode

Content-Type : text/plain;name = "report.doc"

Content-Disposition : attachment; filename = "report.doc"